AL300ULXJG
Power Supply/Charger

Rev. DSAL300ULXJG_12052012

AL300ULXJG

Overview

AL300ULXJG is a power supply/charger that converts a 115VAC/60Hz input into a single 12VDC or 24VDC Class 2 Rated power limited output.

Specifications

Input:

- [illegible]
- [illegible]

Output:

- 12VDC or 24VDC selectable output.
  Burglar Alarm Applications (UL 603):
  12VDC = 10VDC-13.2VDC.
  24VDC = 20VDC-26.4VDC.
- [illegible]
- Class 2 Rated power limited output.
- [illegible]
- [illegible]

Battery Backup:

- [illegible]
  gel type batteries.
- [illegible]
- [illegible]

Supervision:

- [illegible]
- [illegible]
- [illegible]

Visual Indicators:

- [illegible]

Electrical:

- [illegible]
- [illegible]
- [illegible]

Mechanical:

- [illegible]
  - Accommodates up to two (2) 12VDC/18AH batteries.
- [illegible]
- [illegible]

Agency Approvals

[illegible]

Downloaded from Datasheet.su

Enclosure Dimensions *(H x W x D) (approximate)*:

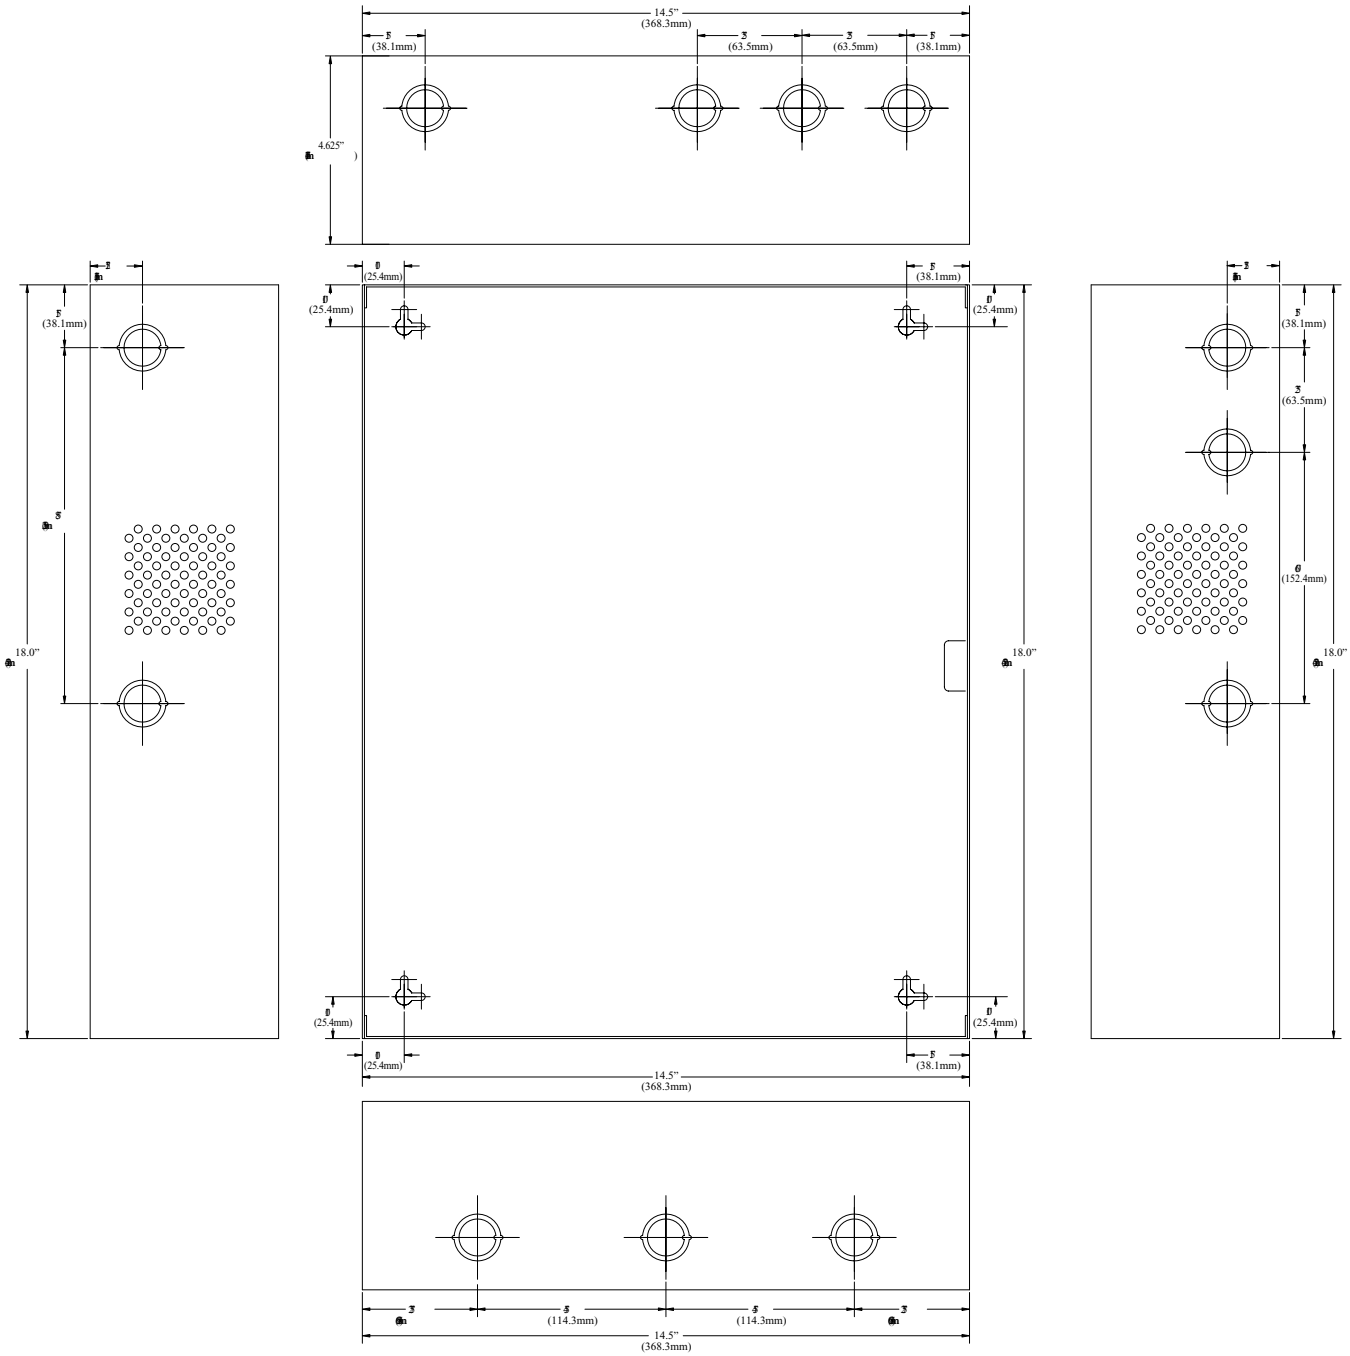

Downloaded from Datasheet.su