



DPS1

Overview

DPS1 converts a low voltage AC input into 6VDC, 12VDC or 24VDC output. These general purpose power supplies have a wide range of applications for access control, security and CCTV system accessories that require additional power.

Specifications

Input:

- 120VAC input
- 24VDC output use T2428100.

Output:

- 6VDC, 12VDC, 24VDC
- 750mA continuous supply current at 24VDC.
- 12VDC output use T1228100.
- 24VDC output use T2428100.

Battery Backup:

- 12VDC battery backup
- 12VDC battery backup
- 12VDC battery backup when AC fails.
- 12VDC battery backup
- 12VDC battery backup

Visual Indicators:

- 12VDC output indicator
- 12VDC output indicator

Electrical:

- 120VAC input
- 120VAC input
- 120VAC input
- 120VAC input
- 120VAC input
- 120VAC input

Features:


- 12VDC output
- 12VDC output
- 12VDC output
- 12VDC output
- 12VDC output
- 12VDC output

Mechanical:

- 12VDC output
- 12VDC output
- 12VDC output
- 12VDC output
- 12VDC output
- 12VDC output

Board Dimensions (L x W x H) (approximate):

12VDC

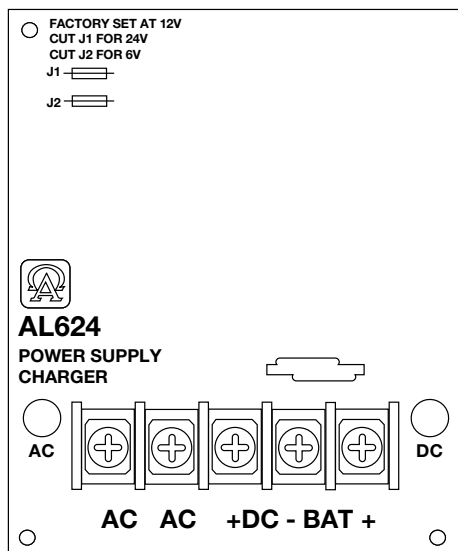

ST3 Mechanical Drawing

