



Specification

# Specification

Spec No. : **FXP280**  
Part No. : **FXP280.07.0100A**  
Model : 868MHz ISM Band Flex Circuit Antenna  
Features : 75\*45\*0.1mm  
100mm Ø1.13 Cable

**RoHS** ✓



VERSION	DATE	PAGE	DESCRIPTION	CENTRE	APPROVED
A	09/21/2009	All	Antenna Specifications	Taiwan	Ruben F. Cuadras



## Specification

### I. OVERVIEW

The Taoglas FXP280 868 MHz ISM Antenna covers from 863-870 MHz used in the 868 MHz ISM (Industrial Scientific Medical) European Band. The antenna has been designed in a flexible material with a square form-factor and cable connection for an easy installation. The antenna works on different plastic materials and thickness. We have selected a piece of ABS with 2 mm of thickness as a baseline for testing.

### II. ANTENNA CHARACTERISTICS

Parameter	Specification
Frequency Range	863MHz to 870MHz
Return Loss (dB)	-20
Efficiency (%)	40
Gain (dBi)	1.5
Impedance	50 $\Omega$
VSWR	$\leq 2:1$
Polarization	Linear
Power Handled	5W
Operation Temperature	-40°C ~ +85°C
Storage Temperature	-40°C ~ +85°C
Dimensions	75*45*0.1mm
Weight	1.5g
Connector	MHFII (U.FL Compatible)
Cable Standard	Mini-Coax 1.13 mm
Cable Length and color	100mm, Black
RoHS Compliant	Yes
Adhesive	3M 467



Specification

### III. TEST SET UP

An ETS-Lindgren 3D Scan System with Anechoic Chamber

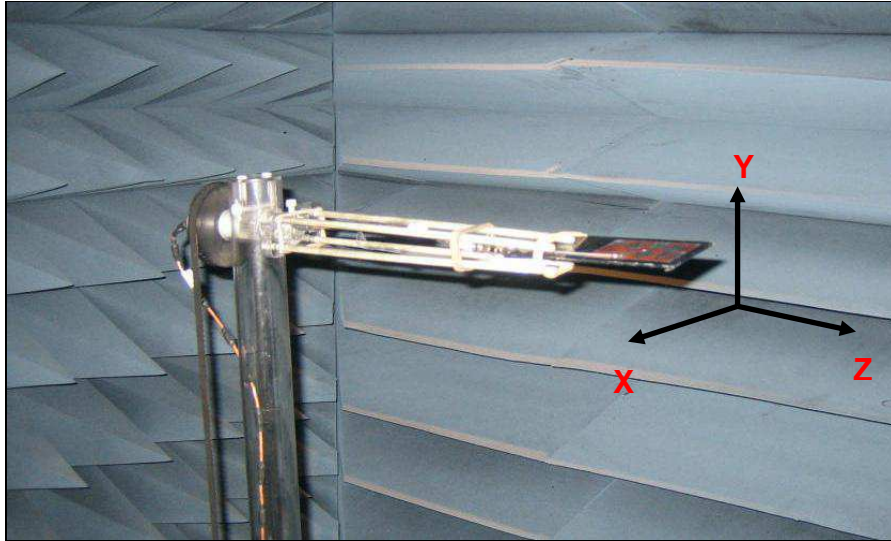


Figure 1. ETS-Lindgren System.

Rhode & Schwartz ZVL6 Vector Network Analyzer

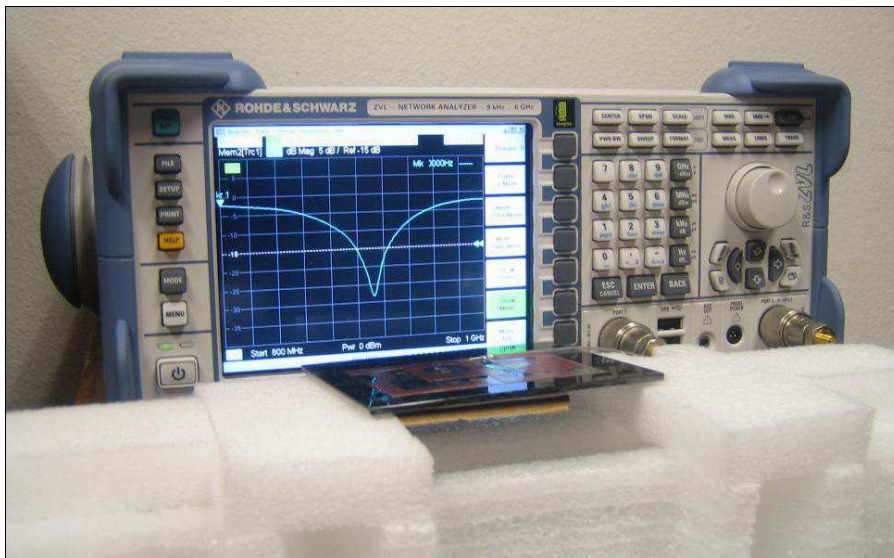


Figure 2. Network Analyzer.



## IV. ANTENNA PARAMETERS

The next antenna parameter graphs like Return Loss, VSWR and smith chart were measured in the Agilent Rhode & Schwartz ZVL6 Vector Network Analyzer. The Gain, Efficiency and Radiation Patterns were measured in the ETS-Lindgren 3D Scan System.

### A. Return Loss Data

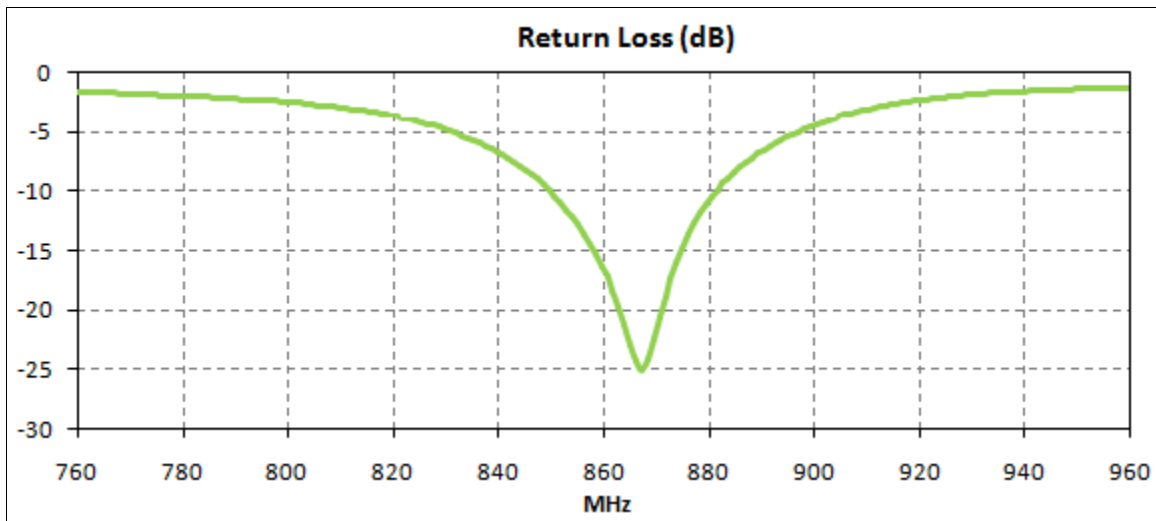


Figure 3. Return Loss for the FXP280 Antenna.

### B. VSWR Data

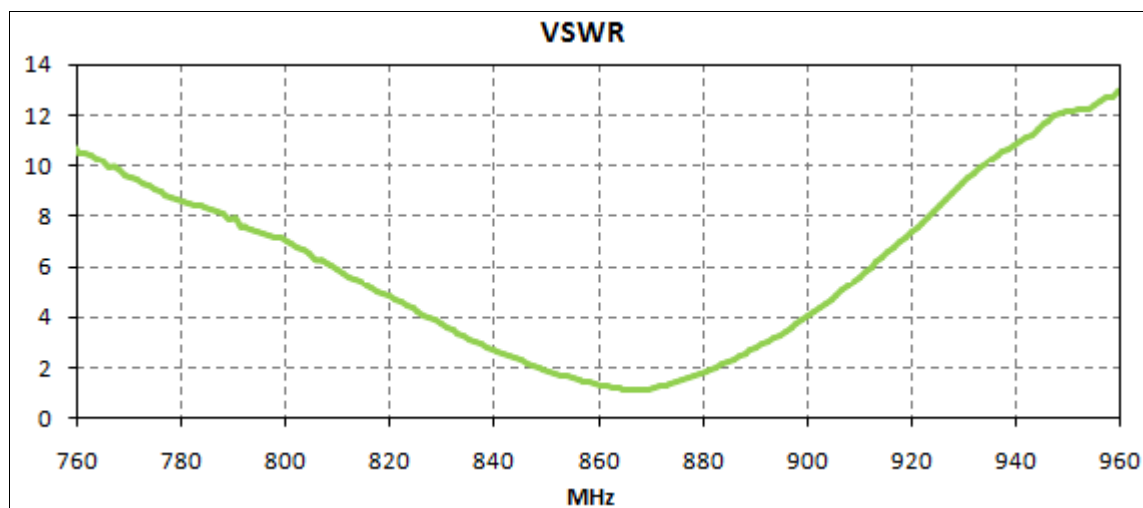


Figure 4. VSWR for the FXP280 Antenna.



Specification

### C. Smith Chart Data

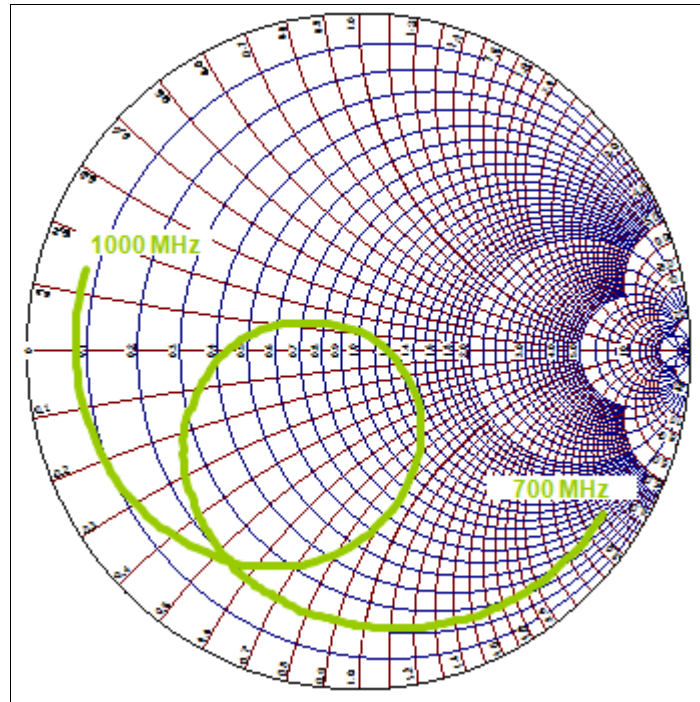


Figure 5. Smith Chart for the FXP280 Antenna.

### D. Efficiency Data

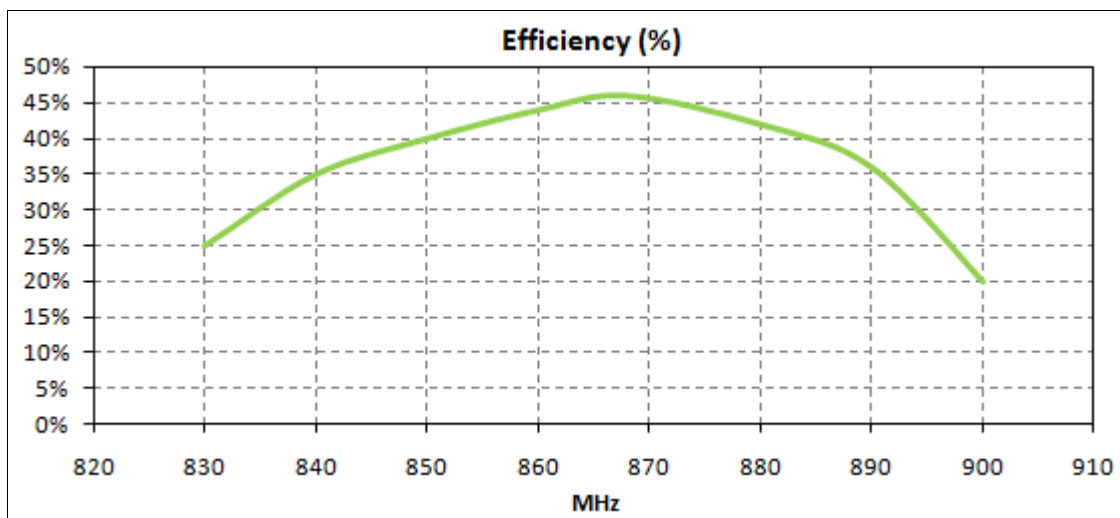


Figure 6. Efficiency for the FXP280 Antenna.



Specification

E. Gain Data

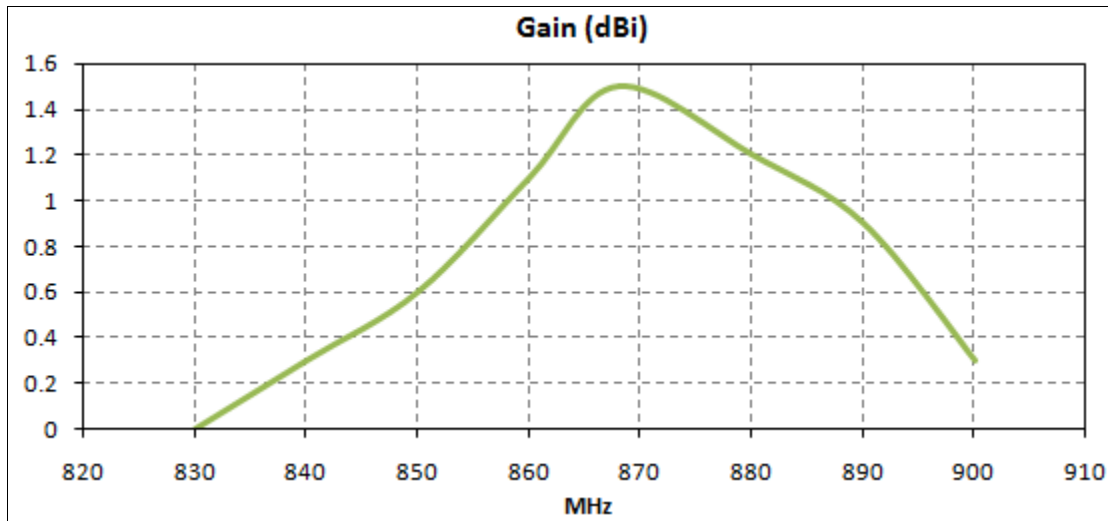


Figure 7. Gain for the FXP280 Antenna.

F. Radiation Pattern Data.

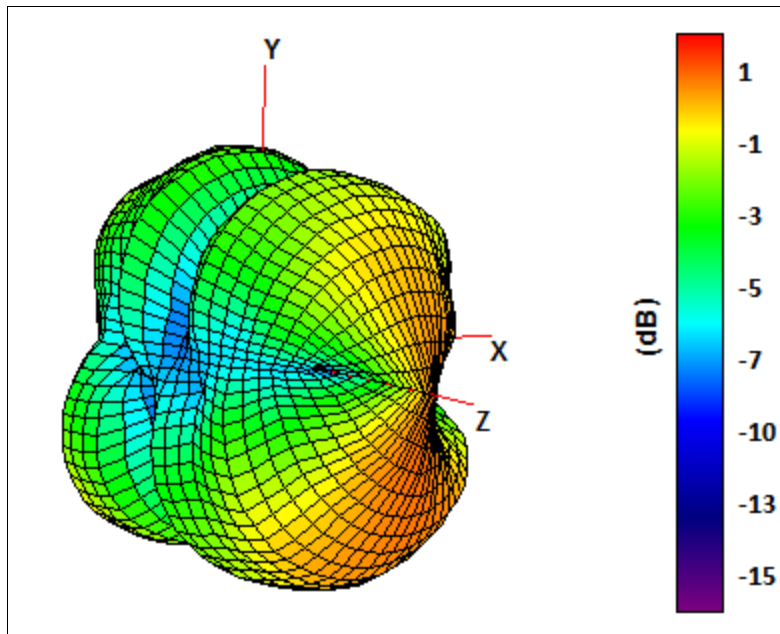


Figure 8. Radiation pattern 3D View, Figure 1 as reference (dB).

Downloaded from [Datasheet.su](http://Datasheet.su)



Specification

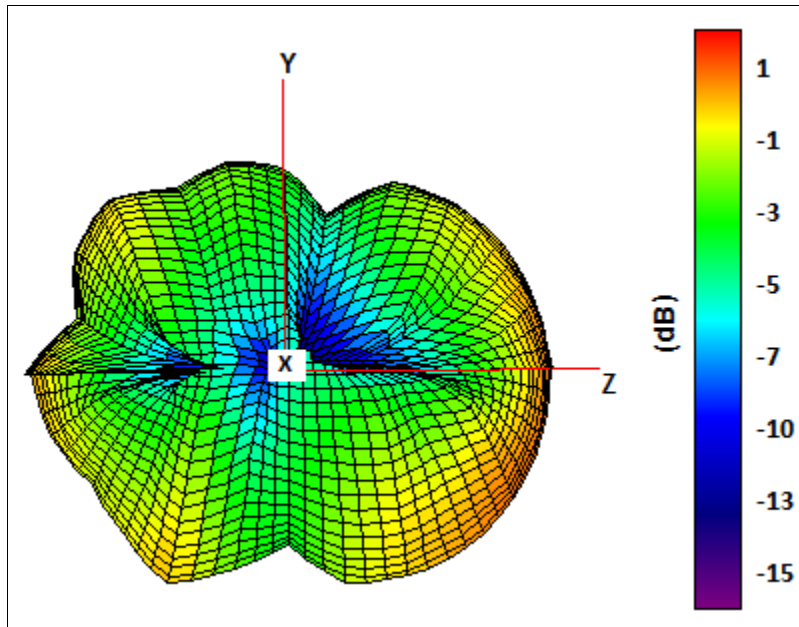


Figure 9. Radiation pattern YZ Plane, Figure 1 as reference (dB).

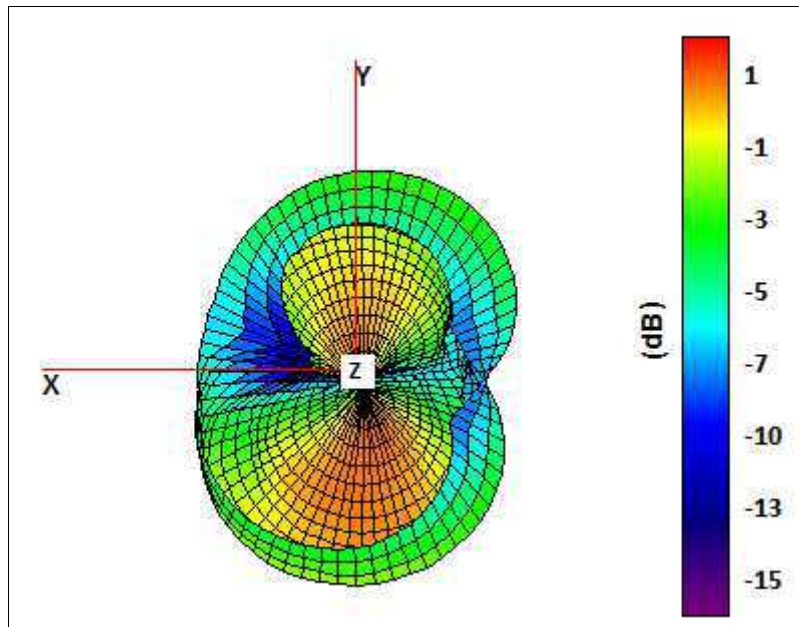


Figure 10. Radiation pattern XY plane, Figure 1 as reference (dB).

Specification


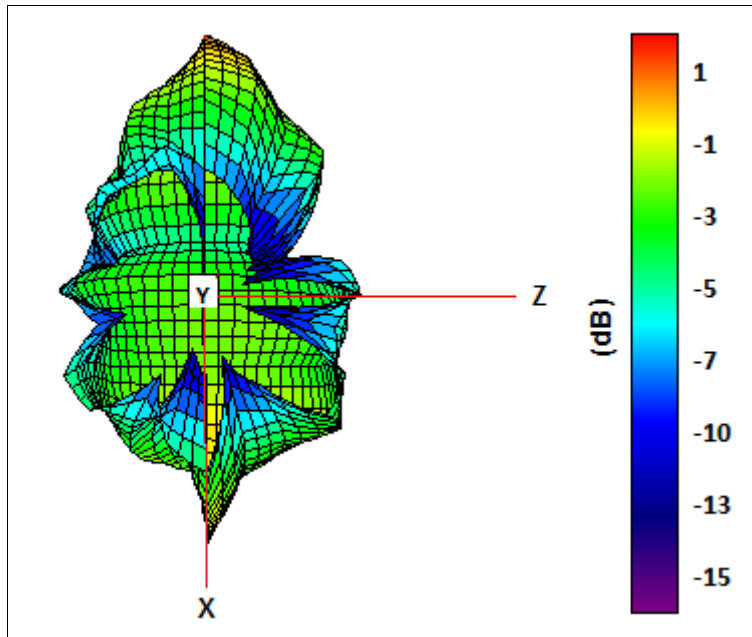



Figure 11. Radiation pattern XY plane, Figure 1 as reference (dB).

V. MECHANICAL DRAWING



XXX.	±2.0	PART NO		PRODUCT NAME			
XX.	±1.0	FXP280		FXP280 868 MHz ISM Band Antenna			
X.	±0.5						
.X	±0.1	REV	UNIT	SCALE	SIZE	SHEET	CUSTOMER
.XX	±0.05	A	mm	1/1	A 4	1 OF 1	taoglas

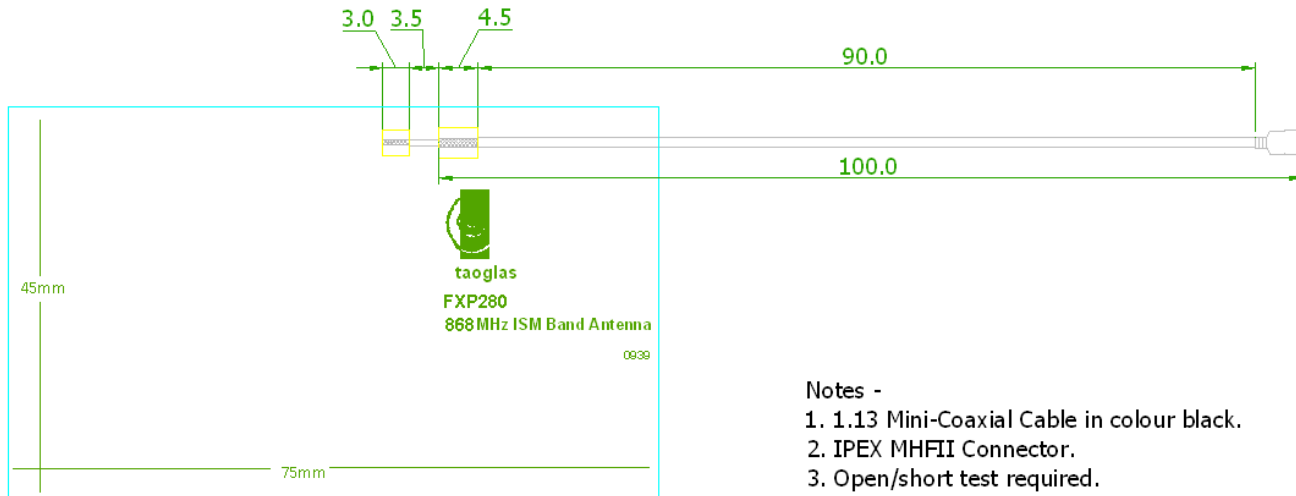

This drawing and its inherent design concepts are property of taoglas. It should not be copied or given to third parties without the written consent of taoglas.

Figure 12. Mechanical Drawing for the FXP280 Antenna.