

Intrinsically Safe Explosion-proof

# EB3C Relay Barriers

# EB3L Lamp Barriers




**Compact housing, low power consumption**  
**A variety of control units can be connected.**



▲ Relay Barriers


▼ Lamp Barriers

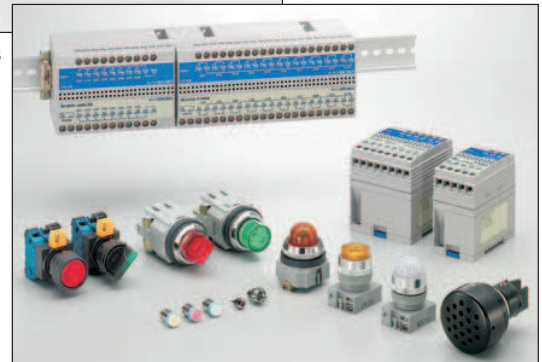




# Easy-to-operate Intrinsically Safe Lamp Barriers for Worldwide

## Compact and Lightweight

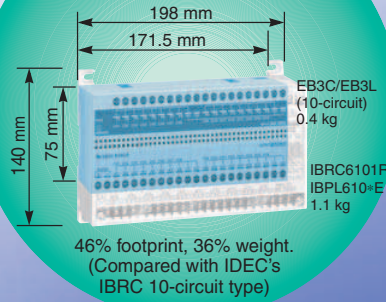

## No Grounding Required (AC/DC)



## Worldwide Usage

- Universal AC power voltage (100 to 240V AC)
- Compliance with US, Canadian, European, and Japanese (TIIS) standards





# Relay Barriers and Usage

Type EB3C

Type EB3L

## Illuminated Pushbutton/Selector Switches can be used.

Illuminated pushbutton/selector switches can be used with the combination of EB3C and EB3L.



## ClassNK

Approved for use on ship and other marine structures (Japan).



## A Variety of Pilot Lights


ø6, ø8, ø10, ø22, and ø30 pilot lights can be connected to the EB3L.



Super-bright LED is used on ø22 and ø30 pilot lights.

Lens colors: Amber, blue, green, red, white, and yellow

Dry-contact switches with 0.5Ω maximum contact resistance can be connected to the EB3C.



## Connector Type

MIL connector on the non-intrinsically safe side.

- Easy connection to PLCs
- Wiring is cut by 90% (compared with IDEC's 16-circuit EB3C).
- Various 20-pin MIL connectors can be connected.



## Buzzer can be connected to the EB3L

Continuous / intermittent buzzer sound available.




## Common Wiring for PLC Inputs

8- and 16-circuit types are available in common wiring types, ideal for connection to PLCs.

## Spring-up Fingersafe Terminals Reduce Wiring Time

Spring-up structure Fingersafe




# EB3C Relay Barrier

Input contacts can be used in any explosive gas and Zone 0/Class I Div. 1 areas.

|                      |                            |
|----------------------|----------------------------|
| Explosion protection |                            |
| Relay Barrier:       | [Exia] II C                |
| Switch:              | Exia II CT6 or Exia II BT6 |

- IEC60079 compliant
- Dry-contact switches with 0.5Ω maximum contact resistance can be connected to the EB3C.
- Compact and lightweight (46% footprint and 36% weight compared to IDEC's 10-circuit IBRC)
- 8- and 16-circuit types are available in common wiring types, ideal for connection to PLCs. 16-circuit types are also available with a connector.
- Universal AC power voltage (100 to 240V AC)
- No grounding required
- IDEC's original spring-up terminal minimizes wiring time.
- Installation  
35-mm-wide DIN rail mounting or direct screw mounting
- Global usage  
USA: FM  
Canada: CSA  
Europe: CE marking, ATEX  
Japan: TIIS
- Ship class: ClassNK (Japan)

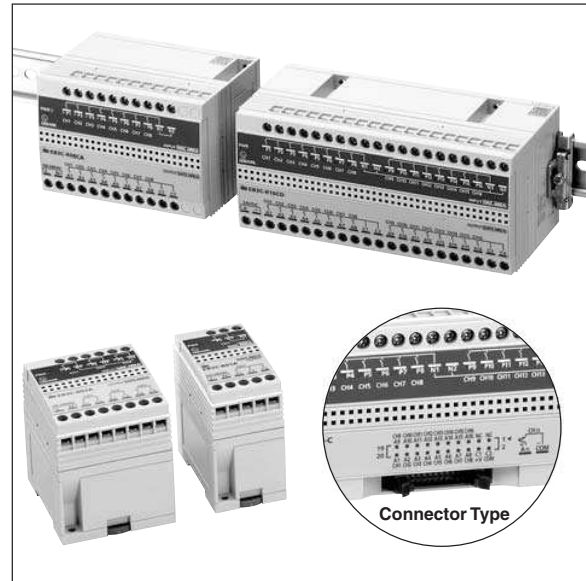

## Types

| Power Voltage  | Number of Channels | Connection to Non-intrinsically Safe Circuit | Input Wiring Method               | Output                   | Type No.    |             |               |
|----------------|--------------------|--|-----------------------------------|--------------------------|-------------|-------------|---------------|
| 100 to 240V AC | 1                  | Screw Terminal                               | Separate/Common Wiring Compatible | Relay                    | EB3C-R01A   |             |               |
|                | 2                  |  |                                   |                          | EB3C-R02A   |             |               |
|                | 3                  |  |                                   |                          | EB3C-R03A   |             |               |
|                | 5                  |  |                                   |                          | EB3C-R05A   |             |               |
|                | 6                  |  |                                   |                          | EB3C-R06A   |             |               |
|                | 8                  |  |                                   |                          | EB3C-R08A   |             |               |
|                | 10                 |  |                                   |                          | EB3C-R10A   |             |               |
|                | 8                  |  |                                   |                          | EB3C-R08CA  |             |               |
|                | 6                  |  |                                   |                          | EB3C-T06A   |             |               |
|                | 8                  |  |                                   |                          | EB3C-T08A   |             |               |
| 10             | EB3C-T10A          |  |                                   |                          |             |             |               |
| 24V DC         | 8                  | Screw Terminal                               | Common Wiring Only                | Transistor (Sink)        | EB3C-T08CKA |             |               |
|                | 8                  |  | Relay                             | EB3C-R08CD               |             |             |               |
|                | 10                 |  |                                   | EB3C-R10D                |             |             |               |
|                | 16                 |  |                                   | EB3C-R16CD               |             |             |               |
|                | 10                 |  |                                   | Transistor (Sink/Source) | EB3C-T10D   |             |               |
|                | 8                  |  |                                   | Common Wiring Only       | Transistor  | Sink        | EB3C-T08CKD   |
|                | 16                 |  |                                   |                          |             | EB3C-T16CKD |               |
|                | 8                  |  |                                   |                          |             | Source      | EB3C-T08CSD   |
|                | 16                 |  |                                   |                          |             | EB3C-T16CSD |               |
|                | 8                  |  |                                   |                          |             | Sink        | EB3C-T16CKD-C |
| 16             | Source             | EB3C-T16CSD-C                                |                                   |                          |             |             |               |
|                | 16                 | Connector                                    |                                   |                          |             |             |               |

## Accessories

| Name          | Type No. | Order No.   | Package Quantity | Description                               |
|---------------|----------|-------------|------------------|---|
| DIN Rail      | BAA1000  | BAA1000PN10 | 10               | Aluminum (1 m long)                       |
|               | BAP1000  | BAP1000PN10 | 10               | Steel (1 m long)                          |
| Mounting Clip | BNL5     | BNL5PN10    | 10               | For fastening EB3C units on the DIN rail. |
|               | BNL6     | BNL6PN10    | 10               |   |

# EB3C Relay Barrier

## Explosion-Protection and Electrical Specifications

|   |  |   |   |                          |
|---|--|---|---|--------------------------|
| Explosion Protection                                |  | Intrinsic safety type (IEC compliant) [Exia] II C |   |                          |
| Degree of Protection                                |  | IP20 (IEC60529)                                   |   |                          |
| Installation Location                               | Relay Barrier                            | Safe indoor place (non-hazardous area)            |   |                          |
|   | Switch                                   | For zone 0, 1, 2 hazardous areas                  |   |                          |
| Non-intrinsically Safe Circuit Maximum Voltage (Um) |  | 250V AC 50/60Hz, 250V DC                          |   |                          |
| Intrinsically Safe Circuits                         | Wiring Method                            | 1-channel Separate Wiring                         | 16-channel Common Wiring  |                          |
|   | Rated Operating Voltage                  | 12V DC $\pm 10\%$                                 |   |                          |
|   | Rated Operating Current                  | 10 mA DC $\pm 20\%$                               |   |                          |
|   | Maximum Output Voltage (Uo)              | 13.2V DC  |   |                          |
|   | Maximum Output Current (Io)              | 14.2 mA   | 227.2 mA  |                          |
|   | Maximum Output Power (Po)                | 46.9 mW   | 750 mW  |                          |
|   | Maximum External Inductance (Lo) (Note)  | 175 (125) mH                                      | 0.68 (0.68) mH  |                          |
|   | Maximum External Capacitance (Co) (Note) | 900 (740) nF                                      |   |                          |
|   | Allowable Wiring Resistance (Rw)         | 300 $\Omega$                                      | 600/(n+1) $\Omega$ (n = number of common channels)                      |                          |
|   | Maximum Channels per Common Line         | -   | 16  |                          |
| Non-intrinsically Safe Circuits                     | Contact Configuration                    | 1NO   |   |                          |
|   |  | Rated Insulation Voltage (Ui)                     |   | 250V AC, 125V DC         |
|   |  | Thermal Current (Ith)                             |   | 3A (common terminal: 8A) |
|   | Contact Allowable Power                  | Resistive Load                                    | AC: 750 VA, DC: 72W   |                          |
|   |  | Inductive Load                                    | AC: 750 VA (cos $\phi = 0.3$ to 0.4)<br>DC: 48W (L/R = 7 ms)            |                          |
|   | Rated Load                               | Resistive Load                                    | 250V AC 3A, 24V DC 3A   |                          |
|   |  | Inductive Load                                    | 250V AC 3A (cos $\phi = 0.3$ to 0.4)<br>24V DC 2A (L/R = 7 ms)          |                          |
|   | Minimum Applicable Load                  |   | 0.1V DC, 0.1 mA (reference value)                                       |                          |
|   | Contact Resistance                       |   | 50 m $\Omega$ maximum (initial value)                                   |                          |
|   | Turn ON Time                             |   | 12 ms maximum (rated voltage)   |                          |
|   | Turn OFF Time                            |   | 10 ms maximum (rated voltage)   |                          |
|   | Mechanical Life                          |   | 20,000,000 operations minimum (at 18,000 operations/hour, without load) |                          |
|   | Electrical Life                          |   | 100,000 operations minimum (at 1,800 operations/hour, rated load)       |                          |
|   | Short-circuit Protection                 |   | None  |                          |
|   | Transistor Output                        | Rated Voltage                                     | 24V DC  |                          |
|   |  | Maximum Voltage                                   | 30V DC  |                          |
|   |  | Maximum Current                                   | 100 mA (connector type: 15 mA)  |                          |
|   |  | Leakage Current                                   | 0.1 mA maximum  |                          |
|   |  | Voltage Drop                                      | 1V maximum  |                          |
|   |  | Clamping Voltage                                  | 33V (1W)  |                          |
| Inrush Current                                      |  | 0.5A maximum (1 sec)                              |   |                          |
| Turn ON Time  |  | 0.1 ms maximum (resistive load)                   |   |                          |
| Turn OFF Time                                       |  | 0.4 ms (typical) (resistive load)                 |   |                          |
| Short-circuit Protection                            |  | None  |   |                          |

Note: Values in ( ) are those approved by TIIS (Technology Institution of Industrial Safety, Japan).

## Certification No.

| Certification Organization | Explosion Protection                              | Certification No.                                   |
|----------------------------|---|---|
| FM                         | Class I, II, III Div. 1 Group A, B, C, D, E, F, G | 3015417 (terminal type)<br>3019223 (connector type) |
|                            | Class I, Zone 0 AEx [ia] IIC                      |   |
| CSA                        | Class I Div. 1 Group A, B, C, D                   | 166730  |
| NEMKO                      | [EExia] II C                                      | Nemko 02ATEX279                                     |
| TIIS Japan                 | Relay barrier: [Exia] II C                        | C15753  |
|                            | Switch (EB9Z-A): Exia II CT6                      | C15758  |
|                            | Switch (EB9Z-A1): Exia II BT6                     | C15961  |
| ClassNK                    | Exia II C   | 02T606  |

Note: For details about switches, see "Switch Explosion-Protection Specifications" on page 5 and "3. Switches in the Hazardous Area" on page 9.

## General Specifications

| Power Voltage Type                   | AC Power Type   | DC Power Type   |
|--------------------------------------|---|---|
| Rated Power Voltage                  | 100 to 240V AC  | 24V DC  |
| Allowable Voltage Range              | 85 to 264V AC   | 21.6 to 26.4V DC  |
| Rated Frequency                      | 50/60 Hz (allowable range: 47 to 63 Hz)   | -   |
| Inrush Current                       | 10A (100V AC)<br>20A (200V AC)  | 10A   |
| Dielectric Strength (1 minute, 1 mA) | Between intrinsically safe circuit and non-intrinsically safe circuit: 1500V AC           |   |
|                                      | Between AC power and output terminal: 1500V AC  |   |
|                                      | Between DC power and transistor output terminal: 1000V AC                                 |   |
| Operating Temperature                | -20 to +60°C (no freezing)  |   |
| Storage Temperature                  | -20 to +60°C (no freezing)  |   |
| Operating Humidity                   | 45 to 85% RH (no condensation)  |   |
| Atmosphere                           | 800 to 1100 hPa   |   |
| Pollution Degree                     | 2 (IEC60664)  |   |
| Insulation Resistance                | 10 M $\Omega$ minimum (500V DC megger, between the same poles as the dielectric strength) |   |
| Vibration Resistance                 | Damage Limits   | Panel mounting: 10 to 55 Hz, amplitude 0.75 mm<br>DIN rail mounting: 10 to 55 Hz, amplitude 0.35 mm                                 |
|                                      | Operation Extremes (relay output only)  | Panel mounting: 10 to 55 Hz, amplitude 0.5 mm<br>DIN rail mounting: 10 to 55 Hz, amplitude 0.35 mm                                  |
| Shock Resistance                     | Damage Limits   | Panel mounting: 500 m/s <sup>2</sup> (3 times each on X, Y, Z)<br>DIN rail mounting: 300 m/s <sup>2</sup> (3 times each on X, Y, Z) |
|                                      | Terminal Style  | M3 screw terminal   |
| Mounting                             | 35-mm-wide DIN rail or panel mounting (M4 screw)  |   |
| Power Consumption (approx.)          | 9.6 VA (EB3C-R10A at 200V AC)<br>4.8 W (EB3C-R16CD at 24V DC)                             |   |
| Weight (approx.)                     | 0.39 kg (EB3C-R16CD)  |   |

## Switch Explosion-Protection Specifications (TIIS Japan)

Simple apparatuses in accordance with relevant standards of each country can be installed in the hazardous area and connected to the EB3C located in the safe area. In Japan, any switches, though regarded as simple apparatuses, must be certified for explosion-proof devices. EB9Z-A and EB9Z-A1 are IDEC's generic Type No. of any single apparatuses certified by TIIS Japan for use with the EB3C, therefore simple apparatuses with specifications shown below can be used as those approved by the Japanese explosion-proof certification.

| Switch Type No.  | EB9Z-A  | EB9Z-A1  |  |                |  |
|--|---|--|--|----------------|--|
| Explosion Proof  | Exia II CT6   | Exia II BT6  |  |                |  |
| Operating Temperature  | -20 to +60°C (no freezing)  |  |  |                |  |
| Operating Humidity   | 45 to 85% RH (no condensation)  |  |  |                |  |
| Degree of Protection   | IP20  |  |  |                |  |
| Dielectric Strength  | 500V AC, 1 mA   |  |  |                |  |
| Intrinsic Safety Ratings and Parameters  | 1-channel Separate Wiring<br>Maximum input voltage (Ui): 13.2V<br>Maximum input current (Ii): 14.2 mA<br>Maximum input power (Pi): 46.9 mW<br>Internal inductance (Li): $\leq 5 \mu\text{H}$<br>Internal capacitance (Ci): $\leq 2 \text{ nF}$  |  |  |                |  |
|  | 16-channel Common Wiring<br>Maximum input voltage (Ui): 13.2V<br>Maximum input current (Ii): 227.2 mA<br>Maximum input power (Pi): 750 mW<br>Internal inductance (Li): $\leq 80 \mu\text{H}$<br>Internal capacitance (Ci): $\leq 32 \text{ nF}$   |  |  |                |  |
| Enclosure Material   | Metallic: Magnesium content must be 6% or less (steel and aluminum are acceptable)  |  |  |                |  |
|  | Plastic: Switch operator exposed area<br>IIC: 20 cm <sup>2</sup> maximum<br>IIB: 100 cm <sup>2</sup> maximum<br>When the switch has a wider exposed area, attach a caution label as shown at right.   | <table border="1"> <tr> <td><b>Caution</b></td> </tr> <tr> <td>To prevent electrostatic charges, do not rub the switch surface during operation. Use a soft cloth dipped with water for cleaning.</td> </tr> <tr> <td><b>Caution Label Example</b></td> </tr> </table> |  | <b>Caution</b> | To prevent electrostatic charges, do not rub the switch surface during operation. Use a soft cloth dipped with water for cleaning. |
| <b>Caution</b>   |   |  |  |                |  |
| To prevent electrostatic charges, do not rub the switch surface during operation. Use a soft cloth dipped with water for cleaning. |   |  |  |                |  |
| <b>Caution Label Example</b>   |   |  |  |                |  |
| Switch Ratings   | Contact rating: Ui, Ii minimum<br>Contact resistance: 0.5 $\Omega$ maximum<br>Cross sectional area of wire: 0.000962 mm <sup>2</sup> maximum<br>Printed circuit board: Thickness 0.5 mm minimum<br>Copper foil width 0.15 mm minimum<br>Thickness 18 $\mu\text{m}$ minimum one/both side(s) |  |  |                |  |
|  | A resistor to prevent contact welding and an LED can be connected to 1-channel separate wiring circuits. Consult IDEC for details.  |  |  |                |  |


Note: For details, see "3. Switches in the Hazardous Area" on page 9.




# EB3C Relay Barrier

## Internal Circuit Block Diagram


### • AC Power, Relay Output Type

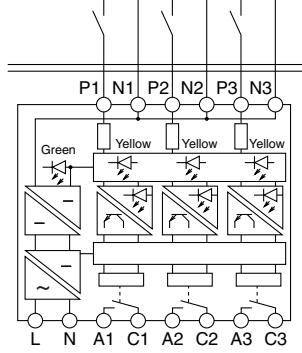

### • DC Power, Transistor Output Type

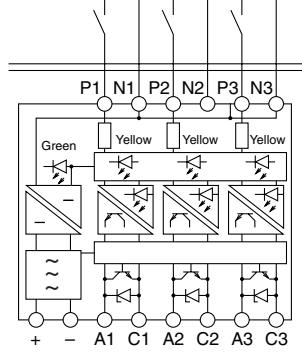


### • Connector Wiring, Sink Output Type

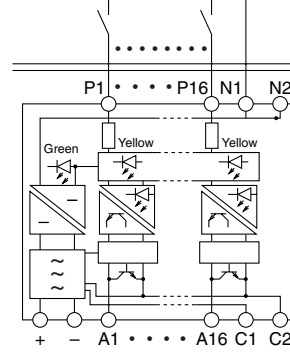


Hazardous Area  
Non-hazardous Area

## Dimensions


### • Screw Terminal Type

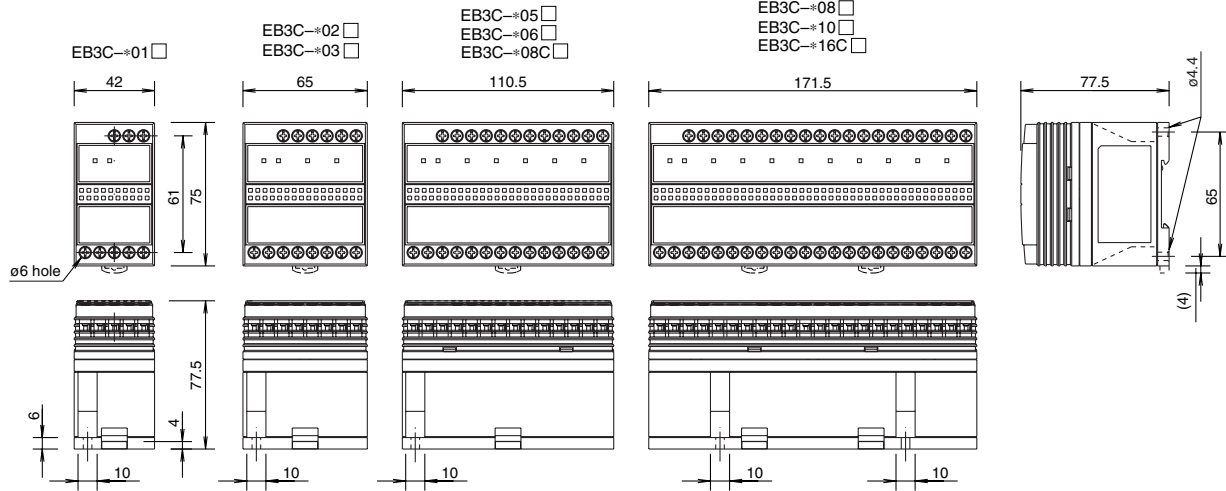


### Mounting Hole Layout (Screw Mounting)

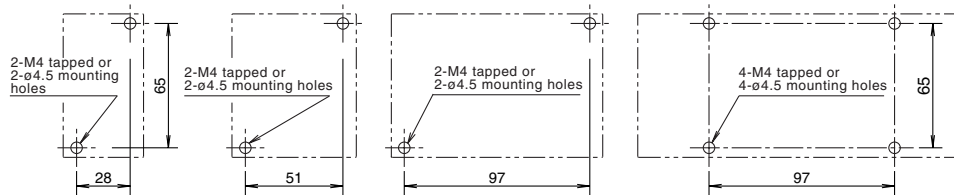



### • Connector Type

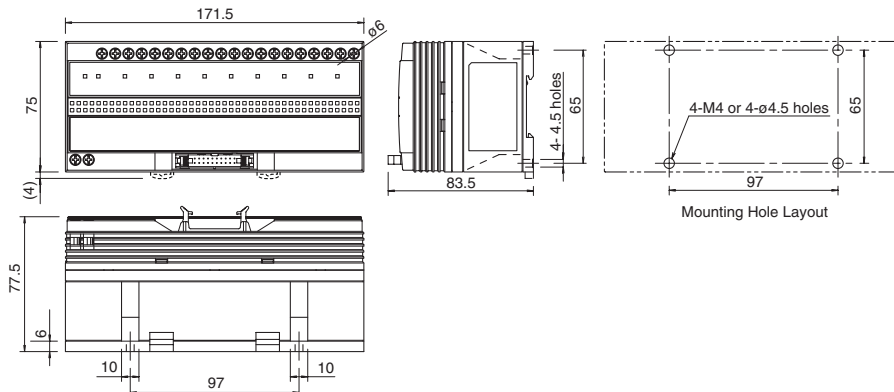

### Applicable Crimping Terminal



### Stripping the Wire End




All dimensions in mm.


# EB3C Relay Barrier

## External Wiring Examples


### • Transistor Sink Output Type (Ex.: EB3C-T08CKD)

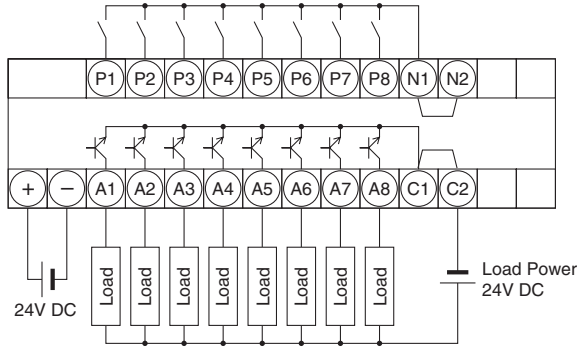


### • Transistor Source Output Type (Ex.: EB3C-T08CSD)

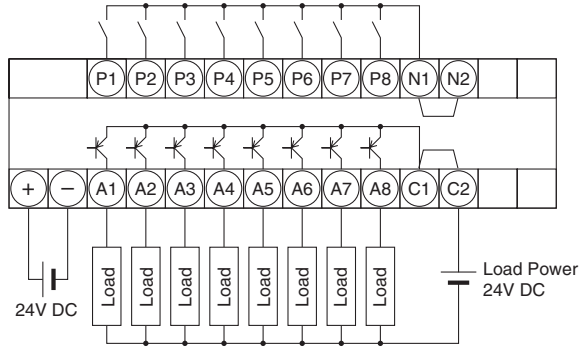

### • Relay Output Type (Ex.: EB3C-R06A)

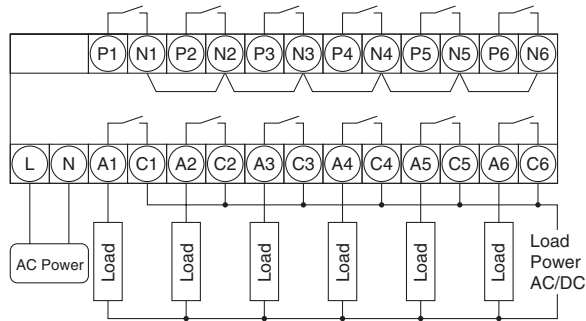


### • Transistor Output Type (Ex.: EB3C-T06A)

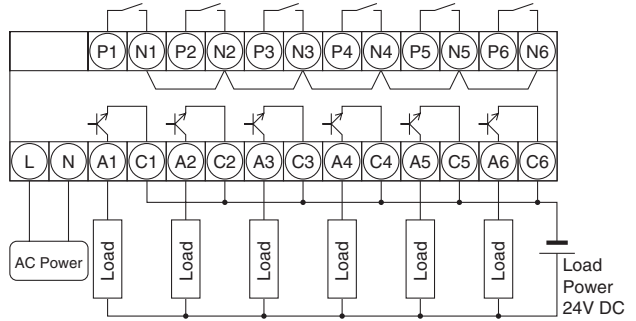


## Connector Type Output Wiring Diagram

### • EB3C-T16CKD-C

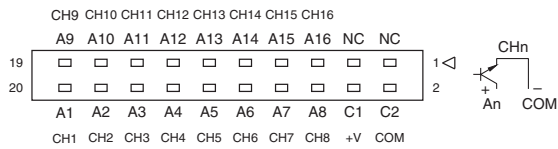

### • EB3C-T16CSD-C

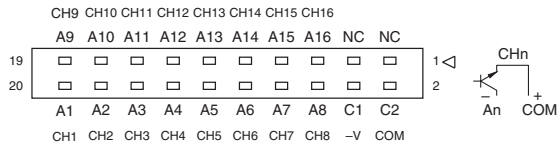

## Wiring Example with IDEC's PLC MicroSmart

| EB3C-T16CKD-C |        | FC4A-N16B3 |          | EB3C-T16CSD-C |        | FC4A-N16B3 |          |
|---------------|--------|------------|----------|---------------|--------|------------|----------|
| Terminal      | Output | Input      | Terminal | Terminal      | Output | Input      | Terminal |
| 20            | A1     | I0         | 20       | 20            | A1     | I0         | 20       |
| 19            | A9     | I10        | 19       | 19            | A9     | I10        | 19       |
| 18            | A2     | I1         | 18       | 18            | A2     | I1         | 18       |
| 17            | A10    | I11        | 17       | 17            | A10    | I11        | 17       |
| 16            | A3     | I2         | 16       | 16            | A3     | I2         | 16       |
| 15            | A11    | I12        | 15       | 15            | A11    | I12        | 15       |
| 14            | A4     | I3         | 14       | 14            | A4     | I3         | 14       |
| 13            | A12    | I13        | 13       | 13            | A12    | I13        | 13       |
| 12            | A5     | I4         | 12       | 12            | A5     | I4         | 12       |
| 11            | A13    | I14        | 11       | 11            | A13    | I14        | 11       |
| 10            | A6     | I5         | 10       | 10            | A6     | I5         | 10       |
| 9             | A14    | I15        | 9        | 9             | A14    | I15        | 9        |
| 8             | A7     | I6         | 8        | 8             | A7     | I6         | 8        |
| 7             | A15    | I16        | 7        | 7             | A15    | I16        | 7        |
| 6             | A8     | I7         | 6        | 6             | A8     | I7         | 6        |
| 5             | A16    | I17        | 5        | 5             | A16    | I17        | 5        |
| 4             | +V     | COM        | 4        | 4             | -V     | COM        | 4        |
| 3             | NC     | COM        | 3        | 3             | NC     | COM        | 3        |
| 2             | COM(-) | NC         | 2        | 2             | COM(+) | NC         | 2        |
| 1             | NC     | NC         | 1        | 1             | NC     | NC         | 1        |

Note 1: The wiring in dashed line does not affect the operation of the MicroSmart.


Note 2: Applicable connector is IDEC's JE1S-201.

# EB3C Relay Barrier


## Wiring

### 1. Separate Wiring

- Each input line of the EB3C makes up one independent intrinsically safe circuit.

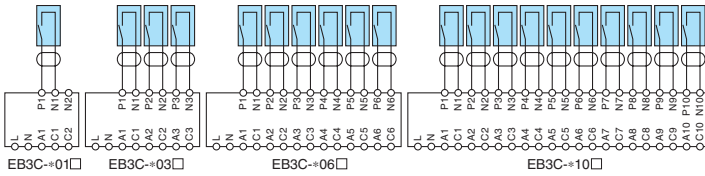


### Diagram Symbols




### 2. Common Wiring (Maximum 16 circuits)


- All input lines are wired to a common line inside the intrinsically safe switch (one common line per intrinsically safe circuit).

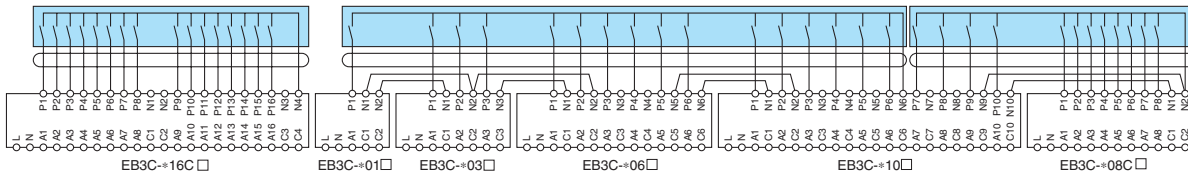

- Some input lines are wired to a common line inside the intrinsically safe switches, while others are outside the switches (one common line per intrinsically safe circuit).

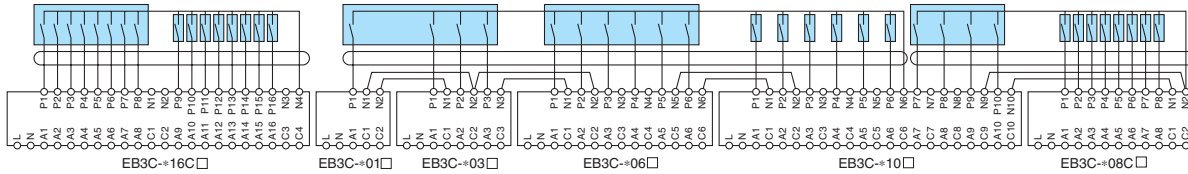

- All input lines are wired to a common line outside the intrinsically safe switches (one common line per intrinsically safe circuit).

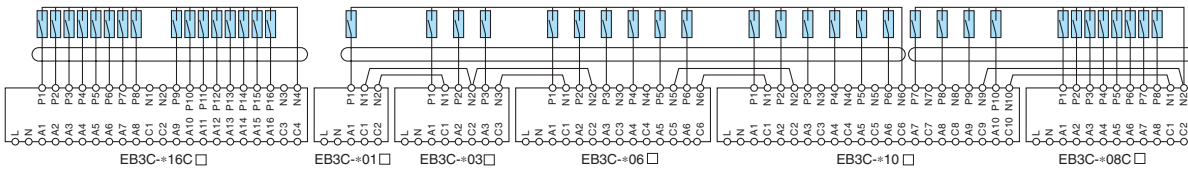

## Recommended Connector Cable for Connector Types

| Description                  | No. of Poles   | Length (m) | Type No.     | Appearance  | Applicable Type       |                       |
|------------------------------|----------------|------------|--------------|---|-----------------------|-----------------------|
| I/O Terminal Cable           | With Shield    | 0.5        | FC9Z-H050A20 |   | MicroSmart I/O Module |                       |
|                              |                | 1          | FC9Z-H100A20 |   |                       |                       |
|                              |                | 2          | FC9Z-H200A20 |   |                       |                       |
|                              | Without Shield | 0.5        | FC9Z-H050B20 |   |                       | MicroSmart I/O Module |
|                              |                | 1          | FC9Z-H100B20 |   |                       |                       |
|                              |                | 2          | FC9Z-H200B20 |   |                       |                       |
| Cable with Crimping Terminal | 20             | 1          | BX9Z-H100E4  | Screw Terminal Type   |                       |                       |
|                              |                | 2          | BX9Z-H200E4  |   |                       |                       |
|                              |                | 3          | BX9Z-H300E4  |   |                       |                       |
| 40-pin Cable for PLC         | 20             | 1          | BX9Z-H100L   | Mitsubishi A, Q Series Input Module (positive common)<br>↓<br>EB3C-T16CKD-C |                       |                       |
|                              |                | 2          | BX9Z-H200L   |   |                       |                       |
|                              |                | 3          | BX9Z-H300L   |   |                       |                       |



## Precautions for Operation


### 1. Installation of EB3C Relay Barriers

- (1) The EB3C can be installed in any direction.
- (2) Install the EB3C relay barrier in a safe area (non-hazardous area) in accordance with intrinsic safety ratings and parameters. To avoid mechanical shocks, install the EB3C in an enclosure which suppresses shocks.
- (3) When installing or wiring the EB3C, prevent electromagnetic and electrostatic inductions in the intrinsically safe circuit. Also prevent the intrinsically safe circuits from contacting with another intrinsically safe circuit and any other circuits.

Maintain at least 50 mm clearance, or provide a metallic separating board between the intrinsically safe circuit and non-intrinsically safe circuit. When providing a metallic separating board, make sure that the board fits closely to the enclosure (top, bottom, and both sides). Allowable clearance between the enclosure and board is 1.5 mm at the maximum.

The clearance of 50 mm between the intrinsically safe circuit and non-intrinsically safe circuit may not be sufficient when a motor circuit or high-voltage circuit is installed nearby. In this case, provide a wider clearance between the circuits referring to 5 (3) "Minimum Parallel Distance between the Intrinsically Safe Circuit and Other Circuits."

- (4) In order to prevent contact between intrinsically safe circuits and non-intrinsically safe circuits, mount EB3C units with terminals arranged in the same direction.

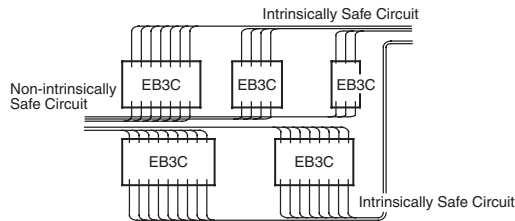

- (5) Maintain at least 6 mm (or 3 mm according to IEC60079-11: 1999) clearance between the terminal of intrinsically safe circuit and the grounded metal part of a metal enclosure, and between the relay terminal block of an intrinsically safe circuit and the grounded metal part of a metal enclosure.
- (6) For installing the EB3C, mount on a 35-mm-wide DIN rail or directly on a panel using screws. Make sure to install securely to withstand vibration. When mounting on a DIN rail, push in the clamp completely. Use the BNL5 or BNL6 mounting clips on both sides of the EB3C to prevent from moving sideways.
- (7) Excessive extraneous noise may cause malfunction and damage to the EB3C. When extraneous noise activates the voltage limiting circuit (thyristor), remove the noise source and restore the power.

### 2. Terminal Wiring

- (1) Using a  $\phi 5.5$  mm or smaller screw driver, tighten the terminal screws (including unused terminal screws) to a torque of 0.6 to 1.0 N·m (recommended value).
- (2) Make sure that IP20 is achieved when wiring. Use insulation tubes on bare crimping terminals.
- (3) To prevent disengaged wires from contacting with other intrinsically safe circuits, bind together the wires of one intrinsically circuit.
- (4) When the adjacent terminal is connected to another intrinsically safe circuit, provide an insulation distance of at least 6 mm.

### 3. Switches in the Hazardous Area (For Japan application only)

- (1) A switch contains the switch contact, enclosure, and internal wiring. A switch contact refers to an ordinary switching device which consists of contacts only, such as a pushbutton switch. See below.

#### Applicable Switches

|                  |                          |   |
|------------------|--------------------------|---|
| Control Switches | Push-pull Switches       | Pushbutton, Foot, Trigger, Rocker, Grip                     |
|                  | Twisting Switches        | Rotary, Selector, Cam, Drum, Thumb wheel                    |
|                  | Lever and Slide Switches | Toggle, Multidirectional, Wobble stick, Lever, Slide switch |
| Sensing Switches | Displacement Switches    | Microswitch, Limit, Magnetic proximity, Door, Reed, Mercury |
|                  | Level Switches           | Liquid level  |
|                  | Others                   | Pressure, Temperature                                       |


Note: For installation in hazardous areas and connection to the EB3C, use switches which are certified, approved, or considered to be simple apparatus in relevant standards in each country.

- (2) When the switch has internal wiring or lead wire, make sure that the values of internal inductance (Li) and capacitance (Ci) are within the certified values.
- (3) Enclose the switch contact's bare live part in an enclosure of IP20 or higher protection.
- (4) Depending on the explosion-protection specifications according to TIIS Japan, the exposed area of plastic switch operator is limited as follows:

- Exia II CT6 (EB9Z-A): 20 cm<sup>2</sup> maximum
- Exia II BT6 (EB9Z-A1): 100 cm<sup>2</sup> maximum

- (5) Attach the certification mark supplied with the EB3C on the EB9Z-A or EB9Z-A1 switch (for Japan application).
- (6) Magnesium content of metallic enclosure must be 6% or less (steel and aluminum are acceptable).
- (7) When the switch operator of plastic enclosure has a wider exposed area than the following limits, attach a caution label as shown below.

- IIC: 20 cm<sup>2</sup> maximum
- IIB: 100 cm<sup>2</sup> maximum




Caution Label Example

- (8) For the 1-circuit separate wiring, a resistor to prevent reed switch contact welding and an LED miniature pilot lights can be connected in series with the contact. See below. Use the terminal screw of M3 or larger.

#### Applicable Resistor Ratings

|               |                              |
|---------------|------------------------------|
| Resistance    | 100 $\Omega$ maximum         |
| Rated Wattage | 0.5 to 3W                    |
| Type          | Metal (oxide) film resistors |



- Applicable LED Type  
IDEC's IPL1 series LED miniature pilot lights.

# EB3C Relay Barrier

## Precautions for Operation


### 4. Output Specifications

- (1) When wiring the output from the EB3C, connect the non-intrinsically safe circuit to terminals A and C. The EB3C output circuit is not equipped with short-circuit protection. If required, provide a protection in the external circuit.
- (2) Relay Output  
Some types of loads generate reverse emf (such as solenoids) or cause a large inrush current (incandescent lamps), resulting in a shorter operation life of output relay contacts. The operation life of contacts can be extended by preventing the reverse emf using a diode, RC, or varistor, or by suppressing the inrush current using a resistor or RL.  
Contacts are made of gold-clad silver. When using at a small current and a low voltage (reference value: 0.1 mA, 0.1V), test the contact on the actual circuit in advance.
- (3) Transistor Output

When connecting a small load, the load may not turn off because of a leakage current, even though the transistor output is turned off. If this is the case, connect a resistor in parallel with the load to bypass the leakage current.

When an excessively high voltage (clamps at 33V, 1W) or a reverse voltage is applied to the output terminals, the clamping circuit or output transistor may be damaged.

When driving an inductive load, be sure to connect a diode across the load to absorb reverse emf.



Example of Overvoltage Absorption Circuit

- (4) In the common wiring only types, the output terminals are not isolated from each other.
- (5) When connecting the connector type EB3C's in parallel, use one power supply to power the EB3C's. Do not connect any wiring to the C1 and C2 terminals.

### 5. Wiring for Intrinsic Safety

- (1) The voltage applied on the general circuit connected to the non-intrinsically safe circuit terminals of the EB3C relay barrier must be 250V AC, 50/60Hz, or 250V DC at the maximum under any conditions, including the voltage of the input power and the internal circuit.
- (2) When wiring, take into consideration the prevention of electromagnetic and electrostatic charges on intrinsically safe circuits. Also, prevent intrinsically safe circuits from contacting with other circuits.
- (3) The intrinsically safe circuits must be separated from non-intrinsically safe circuits. Contain intrinsically safe circuits in a metallic tube or duct, or separate the intrinsically safe circuits referring to the table below.

Note: Cables with a magnetic shield, such as a metallic sheath, prevent electromagnetic induction and electrostatic induction, however, a non-magnetic shield prevents electrostatic induction only. For non-magnetic shields, take a preventive measure against electromagnetic induction.

Finely twisted pair cables prevent electromagnetic induction. Adding shields to the twisted pair cables provides protection against electrostatic induction.

#### Minimum Parallel Distance between the Intrinsically Safe Circuit and Other Circuits (mm)

| Voltage and Current of Other Circuits | Over 100A | 100A or less | 50A or less | 10A or less |
|---------------------------------------|-----------|--------------|-------------|-------------|
| Over 440V                             | 2000      | 2000         | 2000        | 2000        |
| 440V or less                          | 2000      | 600          | 600         | 600         |
| 220V or less                          | 2000      | 600          | 600         | 500         |
| 110V or less                          | 2000      | 600          | 500         | 300         |
| 60V or less                           | 2000      | 500          | 300         | 150         |

- (4) When identifying intrinsically safe circuits by color, use light blue terminal blocks and cables.
- (5) When using two or more EB3C's to set up one intrinsically safe circuit in the common wiring configuration, interconnect two neutral terminals (N1 through N10) on each EB3C between adjacent EB3C's in parallel.
- (6) Make sure that the power of the EB3C and contact are turned off before starting inspection or replacement.

Note: For the details of wiring the intrinsically safe circuits, refer to a relevant test guideline for explosion-proof electric equipment in each country.

# EB3L Lamp Barrier


120 types of pilot lights and buzzers can be connected.

Illuminated pushbuttons and illuminated selector switches can be connected by combining with the EB3C relay barrier.

No grounding required.

| Explosion protection          |             |
|-------------------------------|-------------|
| Lamp Barrier                  | [Exia] II C |
| Pilot Light (separate wiring) | Exia II CT6 |
| Pilot Light (common wiring)   | Exia II CT4 |
| Illuminated Pushbutton        | Exia II CT4 |
| Illuminated Selector Switch   | Exia II CT4 |
| Buzzer (separate wiring)      | Exia II CT6 |

- IEC60079 compliant
- Compact and lightweight (46% footprint and 36% weight compared to IDEC's 10-circuit IBPL)
- 8- and 16-circuit types are available in common wiring types, ideal for connection to PLCs. 16-circuit types are also available with a connector.
- Universal AC power voltage (100 to 240V AC)
- No grounding required
- IDEC's original spring-up terminal minimizes wiring time.
- Installation
  - 35-mm-wide DIN rail mounting or direct screw mounting
- $\phi 6$ ,  $\phi 8$ ,  $\phi 10$ ,  $\phi 22$  and  $\phi 30$  pilot lights available
- Illuminated pushbuttons and illuminated selector switches can be connected by combining with the EB3C relay barrier.
  - Illumination colors: Amber, blue, green, red, white, and yellow (pushlock turn reset type: red only)
- Continuous and intermittent sound types are available for buzzers ( $\phi 30$ ).
- Global usage
  - USA: FM
  - Canada: CSA
  - Europe: CE marking, ATEX
  - Japan: TIIS
- Ship class: ClassNK (Japan)

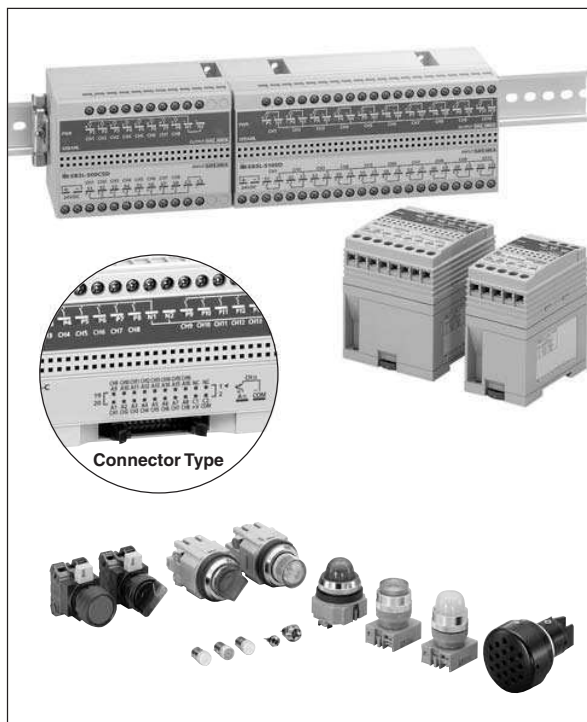

## Types

| Power Voltage  | Number of Channels | Connection to Non-intrinsically Safe Circuit | Input Wiring Method               | Output        | Type No. |             |
|----------------|--------------------|--|-----------------------------------|---------------|----------|-------------|
| 100 to 240V AC | 1                  | Screw Terminal                               | Separate/Common Wiring Compatible | Transistor    | Source   | EB3L-S01SA  |
|                | 2                  |  |                                   |               |          | EB3L-S02SA  |
|                | 3                  |  |                                   |               |          | EB3L-S03SA  |
|                | 6                  |  |                                   |               |          | EB3L-S06SA  |
|                | 10                 |  |                                   |               |          | EB3L-S10SA  |
| 24V DC         | 8                  | Screw Terminal                               | Common Wiring Only                | Transistor    | Source   | EB3L-S08CSD |
|                | 10                 |  | Separate/Common Wiring Compatible |               |          | EB3L-S10SD  |
|                | 16                 |  | Common Wiring Only                |               |          | Connector   |
|                |                    | Source                                       |                                   | EB3L-S16CKD   |          |             |
|                |                    | Sink   |                                   | EB3L-S16CKD-C |          |             |

## Accessories

| Name          | Type No. | Order No.   | Package Quantity | Description                               |
|---------------|----------|-------------|------------------|---|
| DIN Rail      | BAA1000  | BAA1000PN10 | 10               | Aluminum (1 m long)                       |
|               | BAP1000  | BAP1000PN10 | 10               | Steel (1 m long)                          |
| Mounting Clip | BNL5     | BNL5PN10    | 10               | For fastening EB3L units on the DIN rail. |
|               | BNL6     | BNL6PN10    | 10               |   |



# EB3L Lamp Barrier

## • Pilot Lights, Illuminated Pushbuttons, Illuminated Selector Switches, and Buzzers

| Type                                 | Size                  | Series (Note 1)        | Shape                       | Operation Mode                | Contact          | Type No. (Note 2) | Lens Color/ Illumination Color Code*                               | Operation                |  |   |            |  |
|--------------------------------------|-----------------------|------------------------|-----------------------------|-------------------------------|------------------|-------------------|--|--------------------------|--|---|------------|--|
| Pilot Light                          | ø30                   | N                      | Dome                        | —                             | —                | EB3P-LAN1-*       | A: Amber<br>G: Green<br>R: Red<br>S: Blue<br>W: White<br>Y: Yellow | —                        |  |   |            |  |
|                                      |                       |                        | Dome w/Diecast Sleeve       | —                             | —                | EB3P-LAD1-*       |  |                          |  |   |            |  |
|                                      |                       |                        | Square                      | —                             | —                | EB3P-LUN3B-*      |  |                          |  |   |            |  |
|                                      | ø22                   | TW                     | Flush                       | —                             | —                | EB3P-LAW1-*       |  |                          |  |   |            |  |
|                                      |                       |                        | Flush (Marking Type)        | —                             | —                | EB3P-LAW1B-*      |  |                          |  |   |            |  |
|                                      |                       |                        | Dome                        | —                             | —                | EB3P-LAW2-*       |  |                          |  |   |            |  |
|                                      |                       | HW                     | Square Flush (Marking Type) | —                             | —                | EB3P-LUW1B-*      |  |                          |  |   |            |  |
|                                      |                       |                        | Round Flush                 | —                             | —                | EB3P-LHW1-*       |  |                          |  |   |            |  |
|                                      |                       |                        | Dome                        | —                             | —                | EB3P-LHW2-*       |  |                          |  |   |            |  |
|                                      |                       |                        | Square Flush                | —                             | —                | EB3P-LHW4-*       |  |                          |  |   |            |  |
|                                      |                       |                        | LW                          | Round                         | —                | —                 |  |                          | EB3P-LLW1-*  |   |            |  |
|                                      |                       |                        |                             | Square                        | —                | —                 |  |                          | EB3P-LLW2-*  |   |            |  |
|                                      | Round w/Square Bezel  | —                      |                             | —                             | EB3P-LLW3-*      |                   |  |                          |  |   |            |  |
|                                      | Miniature Pilot Light | ø10                    | UP                          | Extended                      | —                | —                 |  |                          | IPL1-18-*  | A: Amber<br>G: Green<br>R: Red<br>W: White<br>Y: Yellow | —          |  |
|                                      |                       |                        |                             | Coned                         | —                | —                 |  |                          | IPL1-19-*  |   |            |  |
| Flush                                |                       |                        |                             | —                             | —                | IPL1-87-*         |  |                          |  |   |            |  |
| ø8                                   |                       | Extended               |                             | —                             | —                | IPL1-88-*         |  |                          |  |   |            |  |
|                                      |                       | Coned                  |                             | —                             | —                | IPL1-89-*         |  |                          |  |   |            |  |
|                                      |                       | Flush                  |                             | —                             | —                | IPL1-67-*         |  |                          |  |   |            |  |
| ø6                                   |                       | Extended               |                             | —                             | —                | IPL1-68-*         |  |                          |  |   |            |  |
|                                      |                       | Coned                  |                             | —                             | —                | IPL1-69-*         |  |                          |  |   |            |  |
|                                      |                       | Illuminated Pushbutton |                             | ø30                           | N                | Extended          | Momentary  | 1NO-1NC                  | EB3P-LBAN211-*   |   |            | A: Amber<br>G: Green<br>R: Red<br>S: Blue<br>W: White<br>Y: Yellow |
| Maintained                           | 1NO-1NC               |                        | EB3P-LBAON211-*             |                               |                  |                   |  |                          |  |   |            |  |
| Mushroom                             | Pushlock Turn Reset   |                        | 1NO-1NC                     |                               |                  | EB3P-LBAVN311-R   | R  |                          |  |   |            |  |
| ø22                                  | TW                    |                        | Extended                    | Momentary                     | 1NO-1NC          | EB3P-LBAW211-*    | A: Amber<br>G: Green<br>R: Red<br>S: Blue<br>W: White<br>Y: Yellow |                          |  |   |            |  |
|                                      |                       |                        |                             | Maintained                    | 1NO-1NC          | EB3P-LBAOW211-*   | R  |                          |  |   |            |  |
|                                      |                       |                        | Mushroom                    | Pushlock Turn Reset           | 1NO-1NC          | EB3P-LBAVW411-R   | R  |                          |  |   |            |  |
|                                      | HW                    |                        | Round                       | Momentary                     | 1NO              | EB3P-LBH1W110-*   | A: Amber<br>G: Green<br>R: Red<br>S: Blue<br>W: White<br>Y: Yellow |                          |  |   |            |  |
|                                      |                       |                        |                             | Maintained                    | 1NO              | EB3P-LBHA1W110-*  |  |                          |  |   |            |  |
|                                      |                       |                        |                             | Momentary                     | DPDT             | EB3P-LBL1W1C2-*   |  |                          |  |   |            |  |
| LW                                   | Round                 |                        | Maintained                  | DPDT                          | EB3P-LBLA1W1C2-* |                   |  |                          |  |   |            |  |
|                                      |                       |                        | Momentary                   | DPDT                          | EB3P-LBL2W1C2-*  |                   |  |                          |  |   |            |  |
|                                      |                       |                        | Maintained                  | DPDT                          | EB3P-LBLA2W1C2-* |                   |  |                          |  |   |            |  |
| Illuminated Selector Switch (Note 3) | ø30                   |                        | N                           | Round                         | 2-position       | 1NO-1NC           |  | EB3P-LSAN211-*           | A: Amber<br>G: Green<br>R: Red<br>S: Blue<br>W: White<br>Y: Yellow | Maintained  |            |  |
|                                      |                       |                        |                             |                               | 3-position       | 2NO               |  | EB3P-LSAN320-*           |  | Maintained  |            |  |
|                                      |                       |                        |                             |                               | 2-position       | 1NO-1NC           |  | EB3P-LSAW211-*           |  | Maintained  |            |  |
|                                      | ø22                   | TW                     | Round                       | 2-position, return from right | 1NO-1NC          | EB3P-LSAW2111-*   |  | Spring return from right |  |   |            |  |
|                                      |                       |                        |                             | 3-position                    | 2NO              | EB3P-LSAW320-*    |  | Maintained               |  |   |            |  |
|                                      |                       |                        |                             | 3-position, return from right | 2NO              | EB3P-LSAW3120-*   |  | Spring return from right |  |   |            |  |
|                                      |                       |                        |                             | 3-position, return from left  | 2NO              | EB3P-LSAW3220-*   |  | Ring return from left    |  |   |            |  |
|                                      |                       |                        |                             | 3-position, 2-way return      | 2NO              | EB3P-LSAW3320-*   |  | 2-way spring return      |  |   |            |  |
|                                      |                       |                        |                             | HW                            | Round            | 2-position        |  | 1NO-1NC                  |  | EB3P-LSHW211-*  | Maintained |  |
|                                      |                       | 3-position             | 2NO                         |                               |                  | EB3P-LSHW320-*    | Maintained   |                          |  |   |            |  |
|                                      |                       | LW                     | Round w/Square Bezel        |                               |                  | 2-position        | DPDT   | EB3P-LSL1W2C2-*          |  | Maintained  |            |  |
|                                      |                       |                        |                             | 3-position                    | DPDT             | EB3P-LSL3W3C2-*   | Maintained   |                          |  |   |            |  |
|                                      | Buzzer                |                        |                             | ø30                           | —                | —                 | —  | —                        |  | —   |            |  |
|                                      |                       |                        |                             | Continuous sound              | —                | EB3P-ZUN12C       |  |                          |  |   |            |  |
|                                      |                       |                        |                             | Intermittent sound            | —                | EB3P-ZUN12F       |  |                          |  |   |            |  |

Note 1: Codes N, TW, HW, LW, and UP are the series names of IDEC's control units.

Note 2: Specify a color code in place of \*.

Note 3: Illuminated selector switches have a knob operator.

### Accessories

| Name     | Type No.    | Package Quantity |
|----------|-------------|------------------|
| LED Lamp | EB9Z-LDS1-* | 1                |

Note: Specify a color code in place of \* in the Type No.

A: amber, G: green, R: red, S: blue, W: white, Y: yellow

## Explosion-Protection and Electrical Specifications

|   |  |  |                                  |
|---|--|--|----------------------------------|
| Explosion Protection                                |  | Intrinsic safety type (IEC compliant) [Exia] II C                      |                                  |
| Degree of Protection                                |  | IP20 (IEC60529)  |                                  |
| Installation Location                               | Lamp Barrier                             | Safe indoor place (non-hazardous area)                                 |                                  |
|   | Pilot Light, Illuminated Switch, Buzzer  | For zone 0, 1, 2 hazardous areas                                       |                                  |
| Non-intrinsically Safe Circuit Maximum Voltage (Um) |  | 250V AC 50/60Hz, 250V DC   |                                  |
| Operation   |  | Input ON, Output ON (1:1)  |                                  |
| Intrinsically Safe Circuits (Output)                | Wiring Method                            | 1-channel Separate Wiring  | 16-channel Common Wiring         |
|   | Rated Operating Voltage                  | 12V DC   |                                  |
|   | Rated Operating Current                  | 10 mA DC   |                                  |
|   | Maximum Output Voltage (Uo)              | 13.2V DC   |                                  |
|   | Maximum Output Current (Io)              | 14.2 mA  | 227.2 mA                         |
|   | Maximum Output Power (Po)                | 46.9 mW  | 750 mW                           |
|   | Maximum External Inductance (Lo) (Note)  | 125 mH   | 0.68 mH                          |
|   | Maximum External Capacitance (Co) (Note) | 740 nF   |                                  |
|   | Allowable Wiring Resistance (Rw)         | 200/(n+1)Ω (n = number of common channels)                             |                                  |
|   | Maximum Channels per Common Line         | 16   |                                  |
| Voltage and Current when Connecting Control Units   |  | Pilot light: 3.5V, 8.5 mA  | Miniature pilot light: 2V, 10 mA |
| Non-intrinsically Safe Circuits (Signal Input)      |  | Rated voltage: 24V DC<br>Rated current: 5 mA<br>(connector type: 4 mA) |                                  |

## General Specifications

| Power Voltage Type                   | AC Power Type   | DC Power Type   |
|--------------------------------------|---|---|
| Rated Power Voltage                  | 100 to 240V AC  | 24V DC  |
| Allowable Voltage Range              | 85 to 264V AC   | 21.6 to 26.4V DC  |
| Rated Frequency                      | 50/60 Hz (allowable range: 47 to 63 Hz)   | —   |
| Inrush Current                       | 10A (100V AC)<br>20A (200V AC)  | 10A   |
| Dielectric Strength (1 minute, 1 mA) | Between intrinsically safe circuit and non-intrinsically safe circuit: 1500V AC   |   |
|                                      | Between AC power and signal input: 1500V AC                                       |   |
| Operating Temperature                | -20 to +60°C (no freezing)  |   |
| Storage Temperature                  | -20 to +60°C (no freezing)  |   |
| Operating Humidity                   | 45 to 85% RH (no condensation)  |   |
| Atmosphere                           | 800 to 1100 hPa   |   |
| Pollution Degree                     | 2 (IEC60664)  |   |
| Insulation Resistance                | 10 MΩ minimum (500V DC megger, between the same poles as the dielectric strength) |   |
| Vibration Resistance                 | Damage Limits   | Panel mounting: 10 to 55 Hz, amplitude 0.75 mm (2 hours each on X, Y, Z)    |
|                                      |   | DIN rail mounting: 10 to 55 Hz, amplitude 0.35 mm (2 hours each on X, Y, Z) |
| Shock Resistance                     | Damage Limits   | Panel mounting: 500 m/s <sup>2</sup> (3 times each on X, Y, Z)              |
|                                      |   | DIN rail mounting: 300 m/s <sup>2</sup> (3 times each on X, Y, Z)           |
| Terminal Style                       | M3 screw terminal   |   |
| Mounting                             | 35-mm-wide DIN rail or panel mounting (M4 screw)                                  |   |
| Power Consumption (approx.)          | 8.8 VA (EB3L-S10SA at 200V AC)<br>5.2 W (EB3L-S16CSD at 24V DC)                   |   |
| Weight (approx.)                     | 0.35 kg (EB3L-S16CSD)   |   |

## General Specifications of Pilot Light, Illuminated Pushbutton, Illuminated Selector Switch, and Buzzer

|   |   |   |  |
|---|---|---|--|
| Operating Temperature                   |   | -20 to +60°C (no freezing)  |  |
| Operating Humidity                      |   | 45 to 85% RH (no condensation)  |  |
| Dielectric Strength (1 mA, 1 minute)    |   | EB3P: 1000V AC<br>IPL1: 500V AC<br>(between intrinsically safe circuit and dead parts)  |  |
| Insulation Resistance                   |   | 10 MΩ minimum (500V DC megger, between the same poles as the dielectric strength)   |  |
| Pilot Light/Miniature Pilot Light       | Degree of Protection                    | IP65 (IEC60529) (except for terminals)<br>EB3P-LU/IPL1: IP40  |  |
|   | Lens/Illumination Color                 | Pilot light: Amber, blue, green, red, white, yellow<br>Miniature pilot light: Amber, green, red, white, yellow  |  |
| Intrinsic Safety Ratings and Parameters | Intrinsic Safety Ratings and Parameters | 1-channel Separate Wiring<br>Maximum input voltage (Ui): 13.2V<br>Maximum input current (Ii): 14.2 mA<br>Maximum input power (Pi): 46.9 mW<br>Internal inductance (Li): ≤ 5 μH<br>Internal capacitance (Ci): ≤ 2 nF     |  |
|   |   | 16-channel Common Wiring<br>Maximum input voltage (Ui): 13.2V<br>Maximum input current (Ii): 227.2 mA<br>Maximum input power (Pi): 750 mW<br>Internal inductance (Li): ≤ 80 μH<br>Internal capacitance (Ci): ≤ 32 nF    |  |
| Illuminated Switch                      | Degree of Protection                    | IP65 (IEC60529) (except for terminals)<br>EB3P-LSAW**: IP54   |  |
|   | Illumination Color                      | Amber, blue, green, red, white, yellow  |  |
|   | Contact Voltage/Current                 | 12V DC ±10%, 10 mA ±20%<br>(when connecting to the EB3C)  |  |
|   | Intrinsic Safety Ratings and Parameters | 16-channel Common Wiring<br>Maximum input voltage (Ui): 13.2V<br>Maximum input current (Ii): 227.2 mA<br>Maximum input power (Pi): 750 mW<br>Internal inductance (Li): ≤ 80 μH<br>Internal capacitance (Ci): ≤ 32 nF    |  |
| Buzzer                                  | Degree of Protection                    | IP20 (IEC60529) (except for terminals)  |  |
|   | Sound Volume                            | 75 dB minimum (at 1 m)  |  |
|   | Sound Source                            | Piezoelectric oscillator (continuous or intermittent)   |  |
| Intrinsic Safety Ratings and Parameters | Intrinsic Safety Ratings and Parameters | 1-channel Separate Wiring<br>Maximum input voltage (Ui): 13.2V<br>Maximum input current (Ii): 14.2 mA<br>Maximum input power (Pi): 46.9 mW<br>Internal inductance (Li): ≤ 100 mH<br>Internal capacitance (Ci): ≤ 260 nF |  |

Note: Connect buzzers in separate wiring. Buzzers cannot be used in common wiring.


## Certification No.

| Certification Organization | Type  | Explosion Protection                                 | Certification No. |
|----------------------------|---|--|-------------------|
| FM                         | Lamp Barrier  | Class I, II, III Div. 1<br>Group A, B, C, D, E, F, G | 3019223           |
|                            | Buzzer  | Class I, Zone 0 AEx [ia] IIC<br>T6                   |                   |
|                            |   | Class I, Zone 0 AExIICT6                             |                   |
| CSA                        | Lamp Barrier  | Class I Div. 1<br>Group A, B, C, D                   | 166730            |
|                            | Buzzer  | Class I Div. 1<br>Group A, B, C, D T6                |                   |
| NEMKO                      | Lamp Barrier  | [EEExia] II C  | Nemko 02ATEX279   |
|                            | Buzzer  | Exia IICT6   | Nemko 03ATEX1628X |
| TIIS Japan                 | Lamp barrier  | [Exia] II C  | C16355            |
|                            | Pilot light/miniature pilot light (separate wiring) | Exia II CT6  | C16361            |
|                            | Pilot light/miniature pilot light (common wiring)   | Exia II CT4  | C16360            |
|                            | Illuminated switch                                  | Exia II CT4  | C16362            |
| ClassNK                    | Buzzer  | Exia II CT6  | C16363            |
|                            | Lamp barrier  | Exia II C  | 02T606            |
| ClassNK                    | Buzzer  | Exia II CT6  | 04T605            |

Note: Illuminated switches, pilot lights, and miniature pilot lights are certified by TIIS Japan and NK Japan only. FM, CSA, and NEMKO regard these units as simple apparatus, and require no certification.

# EB3L Lamp Barrier

## Internal Circuit Block Diagram

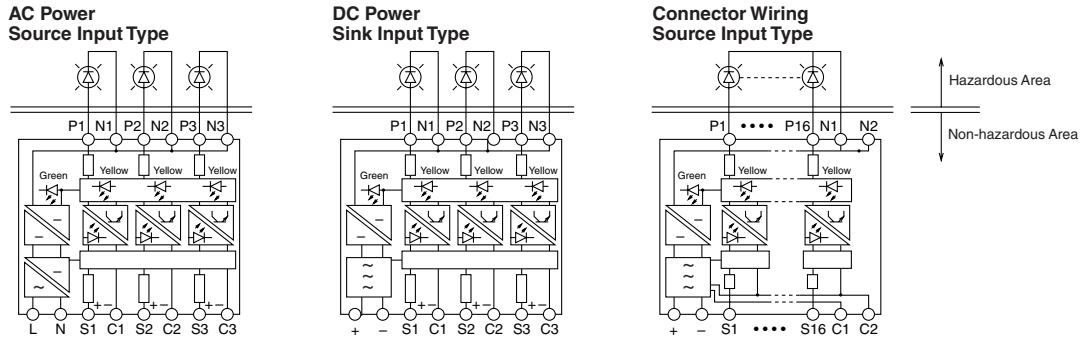

## Allowable Inductance/Capacitance for Intrinsically Safe External Wiring


Keep the inductance ( $L_w$ ) and capacitance ( $C_w$ ) for the external wiring in the intrinsically safe circuit as shown below:

$$L_w \leq L_o - L_i, C_w \leq C_o - C_i$$


where  $L_o$  is the maximum external inductance,  $L_i$  is the internal inductance,  $C_o$  is the maximum external capacitance, and  $C_i$  is the internal capacitance.

## Dimensions


### • Terminal Type

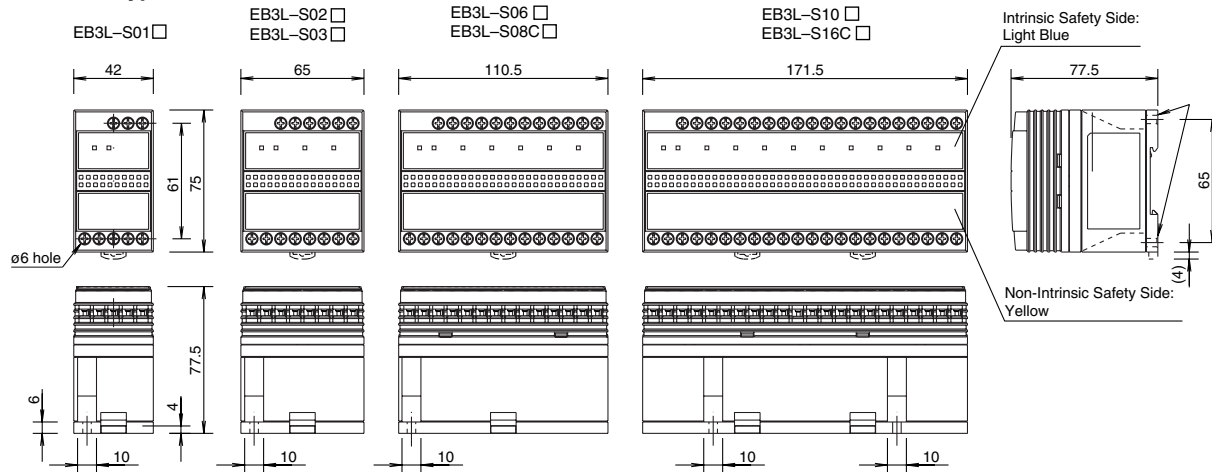


### Mounting Hole Layout (Screw Mounting)

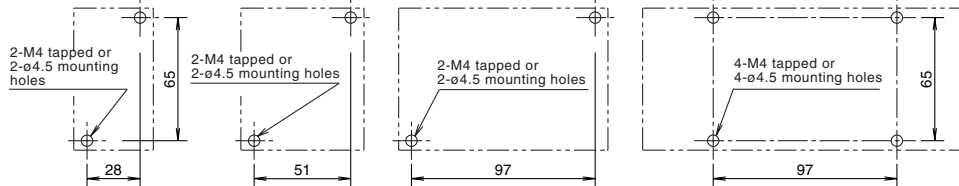


### • Connector Type

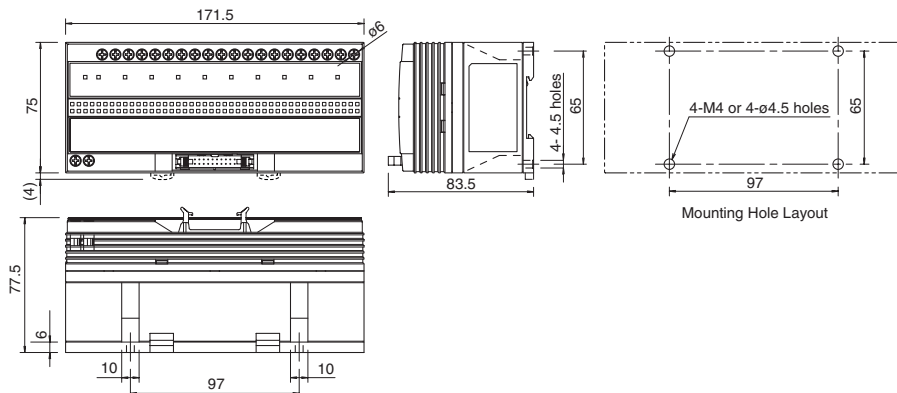


### Applicable Crimping Termin



### Stripping the Wire End



### Stranded Wire (Ferrule)




All dimensions in mm.




# EB3L Lamp Barrier

## • Pilot Lights


**ø30 EB3P-LAN1**




**ø30 EB3P-LAD**

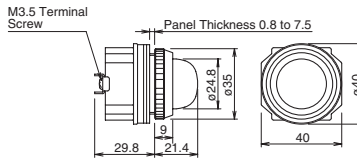


**ø30 EB3P-LUN3B**




**ø22 EB3P-LAW1**




**ø22 EB3P-LAW1B**




**ø22 EB3P-LAW2**




**ø22 EB3P-LUW1B**



**ø22 EB3P-LHW1/EB3P-LHW2/EB3P-LHW4**

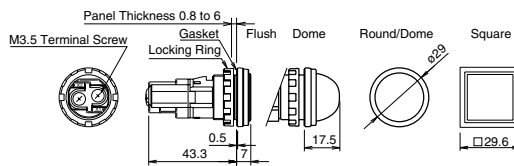


**ø22 EB3P-LLW1/EB3P-LLW2/EB3P-LLW3**

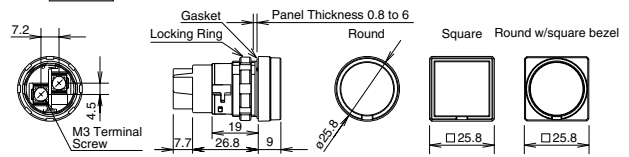


## • Miniature Pilot Lights


**ø10 IPL1-18**




**ø10 IPL1-19**




**ø8 IPL1-87**




**ø8 IPL1-88**




**ø8 IPL1-89**




**ø6 IPL1-67**



**ø6 IPL1-68**




**ø6 IPL1-69**




## • Illuminated Pushbuttons


**ø30 EB3P-LBAN211/LBAON211**

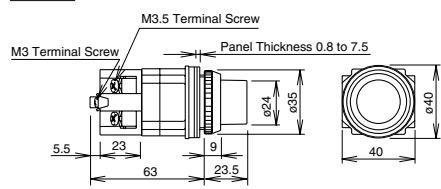


**ø30 EB3P-LBAN311-R**

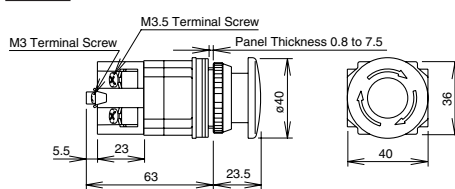


**ø22 EB3P-LBAW211/LBAOW211**

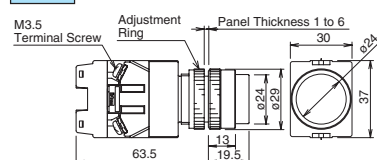


**ø22 EB3P-LBAVW411-R**

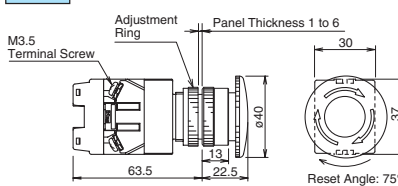


**ø22 EB3P-LBH1W110/LBHA1W110**

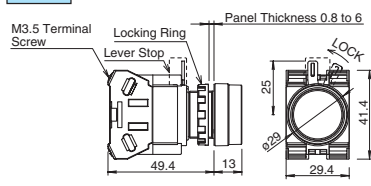

**ø22 EB3P-LBL1W1C2/LBLA1W1C2**

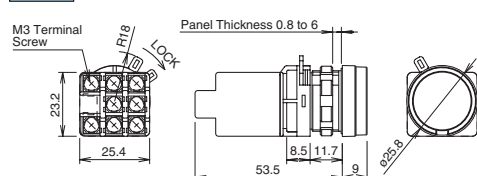

**ø22 EB3P-LBL2W1C2/LBLA2W1C2**

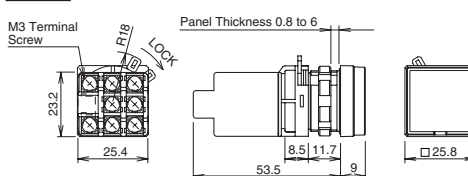


All dimensions in mm.


# EB3L Lamp Barrier

## • Illuminated Selector Switches


### ø30 EB3P-LSAN211/EB3P-LSAN320

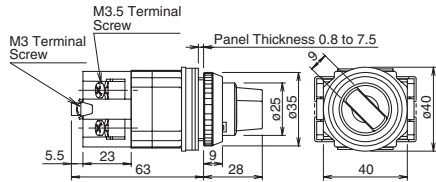


### ø22 EB3P-LSHW211/EB3P-LSHW320

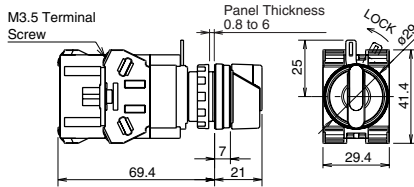

### ø22 EB3P-LSAW\*\*\*

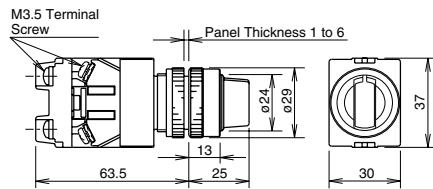


### ø22 EB3P-LSL1W2C2/EB3P-LSL3W3C2

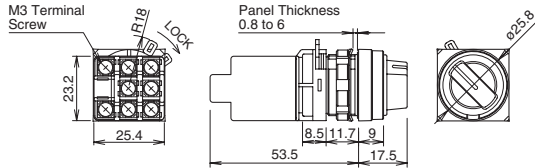


## • Buzzer

### ø30 EB3P-ZUN12C/ZUN12F

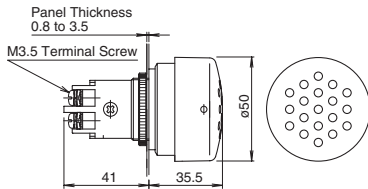

## • LED Lamp

### EB9Z-LDS1

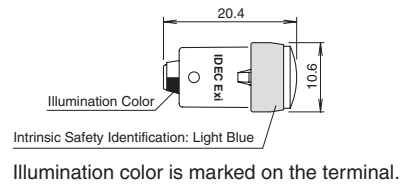

## Polarity Identification

### • Pilot Lights/Illuminated Pushbuttons/Illuminated Selector Switches

Positive terminal: X1


Negative terminal: X2

### • Miniature Pilot Lights

Positive terminal: Long pin terminal

Negative terminal: Short pin terminal

Pin Terminals




A light blue marking is indicated on the negative terminal side to identify intrinsically safe usage.

### • Buzzer

Positive terminal: +

Negative terminal: -


### • LED Lamp




## Panel Cut-out

### • Pilot Lights/Illuminated Pushbuttons/Illuminated Selector Switches/Buzzers

#### ø30




#### ø22




### • Miniature Pilot Lights

#### ø10



#### ø8



#### ø6




\* The 4.8 or 3.2 recess is needed only when using an anti-rotation ring or a nameplate with an anti-rotation projection.

All dimensions in mm.


# EB3L Lamp Barrier

## Non-intrinsically Safe External Input Wiring Examples

### • 8-circuit Common Wiring, Source Input Type

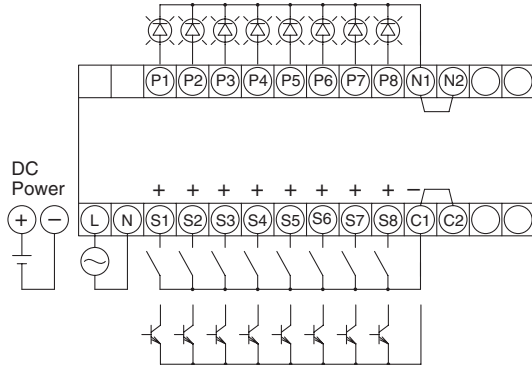


### • 6-circuit Sink Input Type

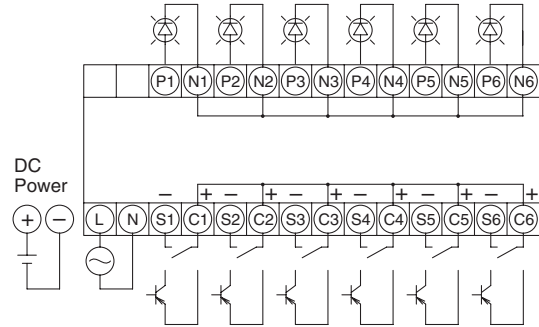


## Connector Wiring Type Terminal Arrangement

### • EB3L-S16CSD-C

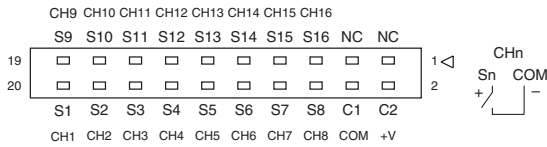

### • EB3L-S16CKD-C

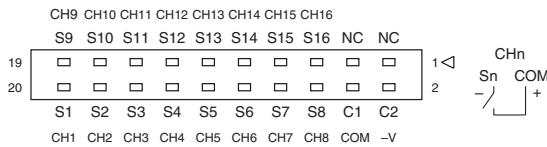

### Wiring Example with IDEC's PLC MicroSmart

| EB3L-S16CSD-C |        | FC4A-T16K3 |          | EB3L-S16CKD-C |        | FC4A-T16S3 |          |
|---------------|--------|------------|----------|---------------|--------|------------|----------|
| Terminal      | Input  | Output     | Terminal | Terminal      | Input  | Output     | Terminal |
| 20            | S1     | Q0         | 20       | 20            | S1     | Q0         | 20       |
| 19            | S9     | Q10        | 19       | 19            | S9     | Q10        | 19       |
| 18            | S2     | Q1         | 18       | 18            | S2     | Q1         | 18       |
| 17            | S10    | Q11        | 17       | 17            | S10    | Q11        | 17       |
| 16            | S3     | Q2         | 16       | 16            | S3     | Q2         | 16       |
| 15            | S11    | Q12        | 15       | 15            | S11    | Q12        | 15       |
| 14            | S4     | Q3         | 14       | 14            | S4     | Q3         | 14       |
| 13            | S12    | Q13        | 13       | 13            | S12    | Q13        | 13       |
| 12            | S5     | Q4         | 12       | 12            | S5     | Q4         | 12       |
| 11            | S13    | Q14        | 11       | 11            | S13    | Q14        | 11       |
| 10            | S6     | Q5         | 10       | 10            | S6     | Q5         | 10       |
| 9             | S14    | Q15        | 9        | 9             | S14    | Q15        | 9        |
| 8             | S7     | Q6         | 8        | 8             | S7     | Q6         | 8        |
| 7             | S15    | Q16        | 7        | 7             | S15    | Q16        | 7        |
| 6             | S8     | Q7         | 6        | 6             | S8     | Q7         | 6        |
| 5             | S16    | Q17        | 5        | 5             | S16    | Q17        | 5        |
| 4             | COM(-) | COM(-)     | 4        | 4             | COM(+) | COM(+)     | 4        |
| 3             | NC     | COM(-)     | 3        | 3             | NC     | COM(+)     | 3        |
| 2             | +V     | +V         | 2        | 2             | -V     | -V         | 2        |
| 1             | NC     | +V         | 1        | 1             | NC     | -V         | 1        |

Note 1: The wiring in dashed line does not affect the operation of the EB3L lamp barriers.

Note 2: Applicable connector is IDEC's JE1S-201.




# EB3L Lamp Barrier


## Wiring Example of Intrinsically Safe External Output

### 1. Common Wiring (Maximum 16 circuits) (Buzzers cannot be wired in a common line.)

- All output lines are wired to a common line inside the intrinsically safe equipment (one common line per intrinsically safe circuit).

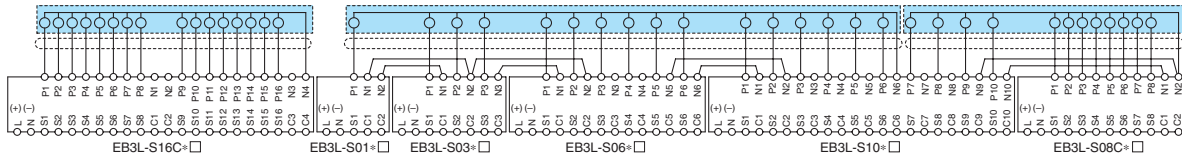


- All input lines are wired to a common line outside the intrinsically safe equipment (one common line per intrinsically safe circuit).

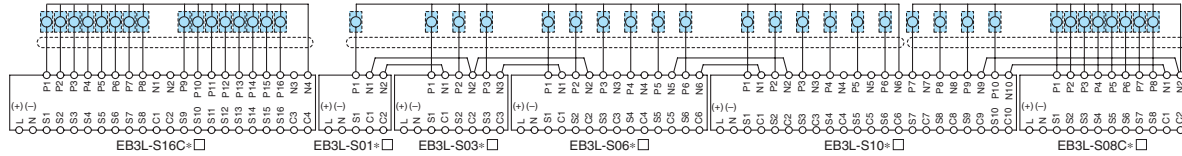

### 2. Separate Wiring

- Each output line of the EB3L makes up one independent intrinsically safe circuit of a pilot light or buzzer.


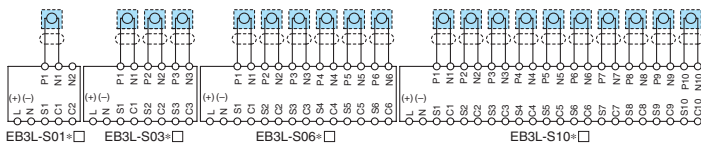


Note:  
When using two or more EB3L's to set up one intrinsically safe circuit in the common wiring configuration, interconnect two neutral terminals (N1 through N10) on each EB3L between adjacent EB3L's in parallel.

### 3. Wiring Illuminated Pushbuttons and Illuminated Selector Switches

(A maximum of 16 channels of EB3L and EB3C can be wired to a common line.)

- The following example illustrates the wiring for a total of 10 contacts used by three illuminated pushbuttons (LB1 to LB3) and three illuminated selector switches (LS1 to LS3).

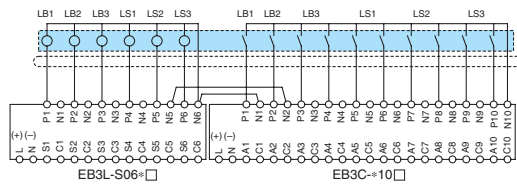

## Recommended Connector Cable for Connector Types

| Description                  | No. of Poles   | Length (m) | Type No.     | Appearance | Applicable Type  |
|------------------------------|----------------|------------|--------------|------------|--|
| I/O Terminal Cable           | With Shield    | 0.5        | FC9Z-H050A20 |            | MicroSmart I/O Module  |
|                              |                | 1          | FC9Z-H100A20 |            |  |
|                              |                | 2          | FC9Z-H200A20 |            |  |
|                              | Without Shield | 0.5        | FC9Z-H050B20 |            | MicroSmart I/O Module  |
|                              |                | 1          | FC9Z-H100B20 |            |  |
|                              |                | 2          | FC9Z-H200B20 |            |  |
| Cable with Crimping Terminal | 20             | 1          | BX9Z-H100E4  |            | Screw Terminal Type  |
|                              |                | 2          | BX9Z-H200E4  |            |  |
|                              |                | 3          | BX9Z-H300E4  |            |  |
| 40-pin Cable for PLC         | 20             | 1          | BX9Z-H100B   |            | Mitsubishi A, Q Series Output Module (sink type)<br>↓<br>EB3L-S16CSD-C |
|                              |                | 2          | BX9Z-H200B   |            |  |
|                              |                | 3          | BX9Z-H300B   |            |  |

## Precautions for Operation


### 1. Installation of EB3L Lamp Barriers

- (1) The EB3L can be installed in any direction.
- (2) Install the EB3L lamp barrier in a safe area (non-hazardous area) in accordance with intrinsic safety ratings and parameters. To avoid mechanical shocks, install the EB3L in an enclosure which suppresses shocks.
- (3) When installing or wiring the EB3L, prevent electromagnetic and electrostatic inductions in the intrinsically safe circuit. Also prevent the intrinsically safe circuits from contacting with another intrinsically safe circuit and any other circuits.

Maintain at least 50 mm clearance, or provide a metallic separating board between the intrinsically safe circuit and non-intrinsically safety circuit. When providing a metallic separating board, make sure that the board fits closely to the enclosure (top, bottom, and both sides). Allowable clearance between the enclosure and board is 1.5 mm at the maximum.

The clearance of 50 mm between the intrinsically safe circuit and non-intrinsically safe circuit may not be sufficient when a motor circuit or high-voltage circuit is installed nearby. In this case, provide a wider clearance between the circuits referring to 6 (3) "Minimum Parallel Distance between the Intrinsically Safe Circuit and Other Circuits."

- (4) In order to prevent contact between intrinsically safe circuits and non-intrinsically safe circuits, mount EB3L units with terminals arranged in the same direction.

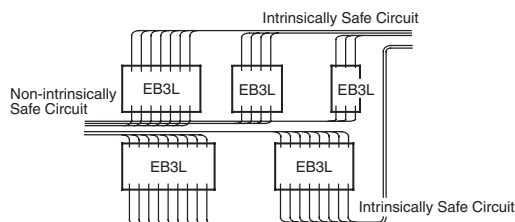

- (5) Maintain at least 6 mm (or 3 mm according to IEC60079-11: 1999) clearance between the terminal of intrinsically safe circuit and the grounded metal part of a metal enclosure, and between the relay terminal block of an intrinsically safe circuit and the grounded metal part of a metal enclosure.
- (6) For installing the EB3L, mount on a 35-mm-wide DIN rail or directly on a panel using screws. The EB3L can be installed in any direction. Make sure to install securely to withstand vibration. When mounting on a DIN rail, push in the clamp completely. Use the BNL5 mounting clips on both sides of the EB3L to prevent from moving sideways.
- (7) Excessive extraneous noise may cause malfunction and damage to the EB3L. When extraneous noise activates the voltage limiting circuit (thyristor), remove the noise source and restore the power.

### 2. Terminal Wiring

- (1) Using a  $\phi 5.5$  mm or smaller screw driver, tighten the terminal screws (including unused terminal screws) to a torque of 0.6 to 1.0 N·m (recommended value).
- (2) Make sure that IP20 is achieved when wiring. Use insulation tubes on bare crimping terminals.
- (3) To prevent disengaged wires from contacting with other intrinsically safe circuits, bind together the wires of one intrinsically circuit.
- (4) When the adjacent terminal is connected to another intrinsically safe circuit, provide an insulation distance of at least 6 mm.

### 3. Signal Input

- (1) Connect the EB3L to the switches or output equipment which have a low leakage current (0.1 mA maximum).
- (2) The EB3L is equipped with power supply. Do not apply external power to the EB3L.
- (3) When connecting the EB3Ls of connector type in parallel, make sure that the same power supply is used. When using C1 and C2 terminals to supply power to outside equipment, maintain the current at 50 mA maximum.

### 4. Power Voltage

- (1) Do not apply an excessive power voltage, otherwise the EB3L may be damaged.
- (2) The EB3L of AC power type may operate at a low voltage (approx. 20V).

### 5. Pilot Lights and Buzzers in the Hazardous Area

- (1) EB3P and IPL1 units shown on page 12 can be used with the EB3L.
- (2) Install the EB3P and IPL1 units on enclosures of IP20 or higher protection.
- (3) When wiring, make sure of correct polarities of the EB3P and IPL1.
- (4) Certification mark is supplied with the units. Attach it on the visible area of the EB3P or IPL1 (for Japan application).
- (5) Magnesium content of metallic enclosure must be 6% or less (steel and aluminum are acceptable).
- (6) The maximum exposed area of plastic enclosure is as follows.

IIC: 20 cm<sup>2</sup> maximum

IIB: 100 cm<sup>2</sup> maximum

When the enclosure has a wider exposed area, attach a caution label as shown below.

#### Caution

To prevent electrostatic charges, do not rub the enclosure surface during operation. Use a soft cloth dipped with water for cleaning.

# EB3L Lamp Barrier

## Precautions for Operation

### 6. Wiring for Intrinsic Safety

- (1) The voltage applied on the general circuit connected to the non-intrinsically safe circuit terminals of the EB3L lamp barrier must be 250V AC, 50/60Hz, or 250V DC at the maximum under any conditions, including the voltage of the power line and the internal circuit.
- (2) When wiring, take into consideration the prevention of electromagnetic and electrostatic charges on intrinsically safe circuits. Also, prevent intrinsically safe circuits from contacting with other circuits.
- (3) The intrinsically safe circuits must be separated from non-intrinsically safe circuits. Contain intrinsically safe circuits in a metallic tube or duct, or separate the intrinsically safe circuits referring to the table at right.

Note: Cables with a magnetic shield, such as a metallic sheath, prevent electromagnetic induction and electrostatic induction, however, a non-magnetic shield prevents electrostatic induction only. For non-magnetic shields, take a preventive measure against electromagnetic induction.

Finely twisted pair cables prevent electromagnetic induction. Adding shields to the twisted pair cables provides protection against electrostatic induction.

### Minimum Parallel Distance between the Intrinsically Safe Circuit and Other Circuits (mm)

| Voltage and Current of Other Circuits | Over 100A | 100A or less | 50A or less | 10A or less |
|---------------------------------------|-----------|--------------|-------------|-------------|
| Over 440V                             | 2000      | 2000         | 2000        | 2000        |
| 440V or less                          | 2000      | 600          | 600         | 600         |
| 220V or less                          | 2000      | 600          | 600         | 500         |
| 110V or less                          | 2000      | 600          | 500         | 300         |
| 60V or less                           | 2000      | 500          | 300         | 150         |

- (4) When identifying intrinsically safe circuits by color, use light blue terminal blocks and cables.
- (5) When using two or more EB3Ls to set up one intrinsically safe circuit in the common wiring configuration, interconnect two neutral terminals (N1 through N10) on each EB3L between adjacent EB3Ls in parallel.
- (6) Make sure that the power of the EB3L, pilot lights, and other connected units are turned off before starting inspection or replacement.

Note: For the details of wiring the intrinsically safe circuits, refer to a relevant test guideline for explosion-proof electric equipment in each country.



### Safety Precautions

- Do not use the EB3C Relay Barrier and EB3L Lamp Barrier for other than explosion protection purposes.
- Read the user's manual to make sure of correct operation before starting installation, wiring, operation, maintenance, and inspection of the EB3C Relay Barrier and EB3L Lamp Barrier.

Specifications and other descriptions in this catalog are subject to change without notice.



## IDEC CORPORATION

7-31, Nishi-Miyahara 1-Chome, Yodogawa-ku, Osaka 532-8550, Japan  
Tel: +81-6-6398-2571, Fax: +81-6-6392-9731  
E-mail: products@idec.co.jp

**IDEC CORPORATION (USA)**  
1175 Elko Drive, Sunnyvale, CA 94089-2209, USA  
Tel: +1-408-747-0550 / (800) 262-IDEC (4332)  
Fax: +1-408-744-9055 / (800) 635-6246  
E-mail: opencontact@idec.com

**IDEC CANADA LIMITED**  
Unit 22-151, Brunel Road Mississauga, Ontario, L4Z 1X3, Canada  
Tel: +1-905-890-8561, Toll Free: (888) 317-4332  
Fax: +1-905-890-8562  
E-mail: sales@ca.idec.com

**IDEC AUSTRALIA PTY. LTD.**  
2/3 Macro Court, Rowville, Victoria 3178, Australia  
Tel: +61-3-9763-3244, Toll Free: 1800-68-4332  
Fax: +61-3-9763-3255  
E-mail: sales@au.idec.com

**IDEC ELECTRONICS LIMITED**  
Unit 2, Beechwood, Chineham Business Park, Basingstoke, Hampshire RG24 8WA, UK  
Tel: +44-1256-321000, Fax: +44-1256-327755  
E-mail: sales@uk.idec.com

**IDEC ELEKTROTECHNIK GmbH**  
Wendenstrasse 331, D-20537 Hamburg, Germany  
Tel: +49-40-25 30 54 10, Fax: +49-40-25 30 54 24  
E-mail: service@idec.de

**IDEC (SHANGHAI) CORPORATION**  
Room 608-609, 6F, Gangtai Plaza, No. 700, Yan'an East Road, Shanghai 200030, P.R.C.  
Tel: +86-21-5353-1000, Fax: +86-21-5353-1263  
E-mail: idec@cn.idec.com

**IDEC (SHANGHAI) CORPORATION**  
Beijing Office  
Unit 1002, No. 10 Kuntai Building, Zhaowai Dajie, Zhao Yang District, Beijing, 100020, P.R.C.  
Tel: +86-10-6599-5541, Fax: +86-10-6599-5540

**IDEC (SHENZHEN) CORPORATION**  
Unit AB-3B2, Tian Xiang Building, Tian'an Shuma Cheng, Fu Tian District, Shenzhen, Guang Dong 518040, P.R.C.  
Tel: +86-755-8356-2977, Fax: +86-755-8356-2944

**IDEC IZUMI (H.K.) CO., LTD.**  
Unit 1505-07, DCH Commercial Centre No. 25, Westlands Road, Quarry Bay, Hong Kong  
Tel: +852-2803-8989, Fax: +852-2565-0171  
E-mail: info@hk.idec.com

**IDEC TAIWAN CORPORATION**  
8F-1, No. 79, Hsin Tai Wu Road, Sec. 1, Hsi-Chih, Taipei County, Taiwan  
Tel: +886-2-2698-3929, Fax: +886-2-2698-3931  
E-mail: service@idectwn.com.tw

**IDEC IZUMI ASIA PTE. LTD.**  
No. 31, Tannery Lane #05-01, Dragon Land Building, Singapore 347788  
Tel: +65-6746-1155, Fax: +65-6844-5995  
E-mail: info@sg.idec.com

www.idec.com

Cat. No. EP1054-1 MARCH 2006 3ML PRINTED IN MALAYSIA