



THIS DRAWING IS A CONTROLLED DOCUMENT. ID: 205001

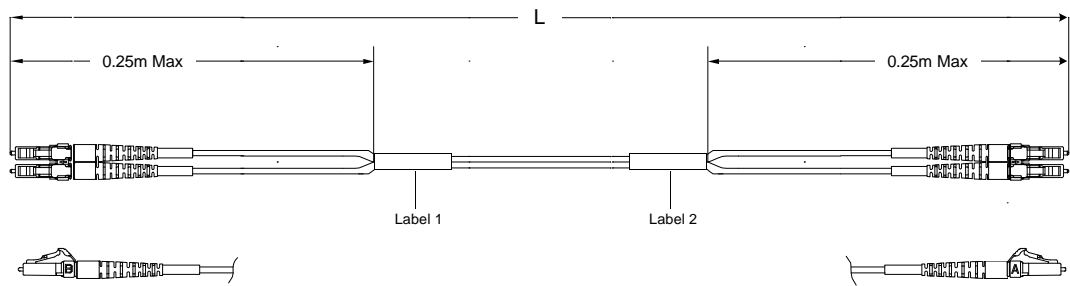

Left Side
 Connector(s): LC-Duplex Secure
 Mode: MM
 Housing Color: Green
 Geom. Spec: N/A



Right Side
 Connector(s): LC-Duplex
 Mode: MM
 Housing Color: Beige
 Geom. Spec: N/A

- Notes:
- 1 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
 - 2 Includes dust caps (not shown on print).
 - 3 IL tested at 1300nm.
 - 4 Label 2 will not be present on any cable assembly less than 5 meters long.

THIS DRAWING IS CONTROLLED. ANY INFORMATION TO BE OBTAINED FROM THIS DRAWING IS TO BE USED ONLY FOR THE PROJECT AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. THIS DRAWING IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
 C/M
 DIST
 16


P	REV	REVISION RECORD	DATE	BY	APP
A1		Rev Per EC# Add-01 to -04	10/9/2007		JD

RESTRICTED TO:

0	PLC	*	*
1	PLC	*	*
2	PLC	*	*
3	PLC	*	*
4	PLC	*	*

DRW	Cable Assy Configurator	MATERIAL		HEAT TREAT	
CHK	Jeremy Duncan	Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APP	Jeremy Duncan				
NAME	FO C/A - 2 fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex				
SCALE	NTS	SIZE	A2	DRAWING NO.	C-1906093
SHEET	1 of 4			REV	A1

CAC Customer Layout Rev: D



USE ON

Part #	L (meters)	L (feet)	LC-Duplex Secure, Green		LC-Duplex, Beige	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1906093-1	0.950 - 1.050	3.11 - 3.44	0.5	-	0.5	-
0-1906093-2	1.950 - 2.050	6.39 - 6.72	0.5	-	0.5	-
0-1906093-3	2.950 - 3.050	9.67 - 10.00	0.5	-	0.5	-
0-1906093-4	3.920 - 4.080	12.86 - 13.38	0.51	-	0.51	-
0-1906093-5	4.920 - 5.080	16.14 - 16.66	0.51	-	0.51	-
0-1906093-6	5.920 - 6.080	19.42 - 19.94	0.51	-	0.51	-
0-1906093-7	6.920 - 7.080	22.70 - 23.22	0.51	-	0.51	-
0-1906093-8	7.920 - 8.080	25.98 - 26.50	0.51	-	0.51	-
0-1906093-9	8.850 - 9.150	29.03 - 30.01	0.51	-	0.51	-
1-1906093-0	9.850 - 10.150	32.31 - 33.30	0.52	-	0.52	-
1-1906093-1	10.850 - 11.150	35.59 - 36.58	0.52	-	0.52	-
1-1906093-2	11.850 - 12.150	38.87 - 39.86	0.52	-	0.52	-
1-1906093-3	12.850 - 13.150	42.15 - 43.14	0.52	-	0.52	-
1-1906093-4	13.850 - 14.150	45.43 - 46.42	0.52	-	0.52	-
1-1906093-5	14.850 - 15.150	48.72 - 49.70	0.52	-	0.52	-
1-1906093-6	15.840 - 16.160	51.96 - 53.01	0.52	-	0.52	-
1-1906093-7	16.830 - 17.170	55.21 - 56.33	0.53	-	0.53	-
1-1906093-8	17.820 - 18.180	58.46 - 59.64	0.53	-	0.53	-
1-1906093-9	18.810 - 19.190	61.71 - 62.95	0.53	-	0.53	-
2-1906093-0	19.800 - 20.200	64.96 - 66.27	0.53	-	0.53	-
2-1906093-1	20.790 - 21.210	68.20 - 69.58	0.53	-	0.53	-
2-1906093-2	21.780 - 22.220	71.45 - 72.90	0.53	-	0.53	-
2-1906093-3	22.770 - 23.230	74.70 - 76.21	0.53	-	0.53	-
2-1906093-4	23.760 - 24.240	77.95 - 79.52	0.54	-	0.54	-
2-1906093-5	24.750 - 25.250	81.20 - 82.84	0.54	-	0.54	-
2-1906093-6	25.740 - 26.260	84.44 - 86.15	0.54	-	0.54	-
2-1906093-7	26.730 - 27.270	87.69 - 89.46	0.54	-	0.54	-
2-1906093-8	27.720 - 28.280	90.94 - 92.78	0.54	-	0.54	-
2-1906093-9	28.710 - 29.290	94.19 - 96.09	0.54	-	0.54	-
3-1906093-0	29.700 - 30.300	97.44 - 99.40	0.55	-	0.55	-
3-1906093-1	30.690 - 31.310	100.68 - 102.72	0.55	-	0.55	-
3-1906093-2	31.680 - 32.320	103.93 - 106.03	0.55	-	0.55	-
3-1906093-3	32.670 - 33.330	107.18 - 109.35	0.55	-	0.55	-
3-1906093-4	33.660 - 34.340	110.43 - 112.66	0.55	-	0.55	-
3-1906093-5	34.650 - 35.350	113.68 - 115.97	0.55	-	0.55	-
3-1906093-6	35.640 - 36.360	116.92 - 119.29	0.55	-	0.55	-
3-1906093-7	36.630 - 37.370	120.17 - 122.60	0.56	-	0.56	-
3-1906093-8	37.620 - 38.380	123.42 - 125.91	0.56	-	0.56	-
3-1906093-9	38.610 - 39.390	126.67 - 129.23	0.56	-	0.56	-
4-1906093-0	39.600 - 40.400	129.92 - 132.54	0.56	-	0.56	-
4-1906093-1	40.590 - 41.410	133.16 - 135.85	0.56	-	0.56	-
4-1906093-2	41.580 - 42.420	136.41 - 139.17	0.56	-	0.56	-

Qty	U of M	Description	Item No.
2	piece	Trace Label	7
4	piece	Eyelet/Shrink tube assembly - White	6
AR	meter	2 Fiber, XG-50/125, 2.0mm, Twinzip, Aqua, OFNR (Riser)	5
2	piece	LC Connector Assy, 1.6mm-2.0mm, MM	4
2	piece	LC Connector Assy, MM	3
2	piece	LC Duplex clip, black	2
4	piece	LC, SC, FC Straight Boot, Beige	1

THIS DRAWING IS A CONTROLLED DOCUMENT

THIS INFORMATION IS CONTROLLED. ANY INFORMATION TO THE OUTSIDE MUST BE APPROVED BY THE PROPERLY AUTHORIZED PERSONNEL. THIS INFORMATION IS CONTROLLED BY THE PROPERLY AUTHORIZED PERSONNEL. THIS INFORMATION IS CONTROLLED BY THE PROPERLY AUTHORIZED PERSONNEL.

LOC
C/E
DIST
16

REV	REV PER	DATE	BY	APP'D
1	Rev Per EC#	10/9/2007	-	JD

RESTRICTED TO: V

DN: Cable Assy Configurator	MATERIAL:	HEAT TREAT
OK: Jeremy Duncan		
APP'D: Jeremy Duncan	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME: FO C/A - 2 fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex		
SCALE: NTS	SIZE: A2	DRAWING NO: C-1906093
		SHEET: 2 of 4
		REV: A1

THIS DRAWING IS A CONTROLLED DOCUMENT


USE ON

Part #	L (meters)	L (feet)	LC-Duplex Secure, Green		LC-Duplex, Beige	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
4-1906093-3	42.570 - 43.430	139.66 - 142.48	0.56	-	0.56	-
4-1906093-4	43.560 - 44.440	142.91 - 145.80	0.57	-	0.57	-
4-1906093-5	44.550 - 45.450	146.16 - 149.11	0.57	-	0.57	-
4-1906093-6	45.540 - 46.460	149.40 - 152.42	0.57	-	0.57	-
4-1906093-7	46.530 - 47.470	152.65 - 155.74	0.57	-	0.57	-
4-1906093-8	47.520 - 48.490	155.90 - 159.05	0.57	-	0.57	-
4-1906093-9	48.510 - 49.490	159.15 - 162.36	0.57	-	0.57	-
5-1906093-0	49.500 - 50.500	162.40 - 165.68	0.58	-	0.58	-
5-1906093-1	50.490 - 51.510	165.64 - 168.99	0.58	-	0.58	-
5-1906093-2	51.480 - 52.520	168.89 - 172.30	0.58	-	0.58	-
5-1906093-3	52.470 - 53.530	172.14 - 175.62	0.58	-	0.58	-
5-1906093-4	53.460 - 54.540	175.39 - 178.93	0.58	-	0.58	-
5-1906093-5	54.450 - 55.550	178.64 - 182.25	0.58	-	0.58	-
5-1906093-6	55.440 - 56.560	181.88 - 185.56	0.58	-	0.58	-
5-1906093-7	56.430 - 57.570	185.13 - 188.87	0.59	-	0.59	-
5-1906093-8	57.420 - 58.580	188.38 - 192.19	0.59	-	0.59	-
5-1906093-9	58.410 - 59.590	191.63 - 195.50	0.59	-	0.59	-
6-1906093-0	59.400 - 60.600	194.88 - 198.81	0.59	-	0.59	-
6-1906093-1	60.390 - 61.610	198.12 - 202.13	0.59	-	0.59	-
6-1906093-2	61.380 - 62.620	201.37 - 205.44	0.59	-	0.59	-
6-1906093-3	62.370 - 63.630	204.62 - 208.75	0.59	-	0.59	-
6-1906093-4	63.360 - 64.640	207.87 - 212.07	0.6	-	0.6	-
6-1906093-5	64.350 - 65.650	211.12 - 215.38	0.6	-	0.6	-
6-1906093-6	65.340 - 66.660	214.37 - 218.70	0.6	-	0.6	-
6-1906093-7	66.330 - 67.670	217.61 - 222.01	0.6	-	0.6	-
6-1906093-8	67.320 - 68.680	220.86 - 225.32	0.6	-	0.6	-
6-1906093-9	68.310 - 69.690	224.11 - 228.64	0.6	-	0.6	-
7-1906093-0	69.300 - 70.700	227.36 - 231.95	0.61	-	0.61	-
7-1906093-1	70.290 - 71.710	230.61 - 235.26	0.61	-	0.61	-
7-1906093-2	71.280 - 72.720	233.85 - 238.58	0.61	-	0.61	-
7-1906093-3	72.270 - 73.730	237.10 - 241.89	0.61	-	0.61	-
7-1906093-4	73.260 - 74.740	240.35 - 245.20	0.61	-	0.61	-
7-1906093-5	74.250 - 75.750	243.60 - 248.52	0.61	-	0.61	-
7-1906093-6	75.240 - 76.760	246.85 - 251.83	0.61	-	0.61	-
7-1906093-7	76.230 - 77.770	250.09 - 255.15	0.62	-	0.62	-
7-1906093-8	77.220 - 78.780	253.34 - 258.46	0.62	-	0.62	-
7-1906093-9	78.210 - 79.790	256.59 - 261.77	0.62	-	0.62	-
8-1906093-0	79.200 - 80.800	259.84 - 265.09	0.62	-	0.62	-
8-1906093-1	84.150 - 85.850	276.08 - 281.66	0.63	-	0.63	-
8-1906093-2	89.100 - 90.900	292.32 - 298.22	0.64	-	0.64	-
8-1906093-3	94.050 - 95.950	308.56 - 314.79	0.64	-	0.64	-
8-1906093-4	99.000 - 101.000	324.80 - 331.36	0.65	-	0.65	-
8-1906093-5	113.850 - 116.150	373.52 - 381.06	0.67	-	0.67	-
8-1906093-6	118.800 - 121.200	389.76 - 397.63	0.68	-	0.68	-


THIS INFORMATION IS CONTROLLED AND IS THE PROPERTY OF AMP TYSO ELECTRONICS, INC. IT IS TO BE KEPT CONFIDENTIAL AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. AMP TYSO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC
CIR
DIST
16

NT	Rev Per EC#	Ad#-01 to -04	10/9/2007	-	JD
P	L/R	REVISION RECORD	DATE	DN	MPD

DIMENSIONS
 meters

 IS UNLESS OTHERWISE SPECIFIED
 0 P L C
 1 P L C
 2 P L C
 3 P L C
 4 D C

Restricted To:
v

DN	Cable Assy Configurator	MATERIAL	-	HEAT TREAT	-
OK	Jeremy Duncan	 Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APD	Jeremy Duncan				
NAME	FO C/A - 2 fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex				
SCALE	NTS	SIZE	A2	DRAWING NO.	C-1906093
SHEET	3 of 4			REV	A1

CAC Customer Layout Rev: D

8 7 6 5 4 3 2 1

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT

Part #	L (meters)	L (feet)	LC-Duplex Secure, Green		LC-Duplex, Beige	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
8-1906093-7	123.750 - 126.250	406.00 - 414.20	0.69	-	0.69	-
8-1906093-8	128.700 - 131.300	422.24 - 430.77	0.7	-	0.7	-
8-1906093-9	138.600 - 141.400	454.72 - 463.91	0.71	-	0.71	-
9-1906093-0	143.550 - 146.450	470.96 - 480.47	0.72	-	0.72	-
9-1906093-1	148.500 - 151.500	487.20 - 497.04	0.73	-	0.73	-
9-1906093-2	198.000 - 202.000	649.60 - 662.72	0.8	-	0.8	-
9-1906093-3	222.750 - 227.250	730.80 - 745.57	0.84	-	0.84	-
9-1906093-4	247.500 - 252.500	812.00 - 828.41	0.88	-	0.88	-

Label 1 Per specification 107-1645-1

Trace # - Bar Code
 Trace # - Human Readable
 Logo Made in XXXX X-XXXXXXXX-X Part Number
 Country of Origin

This label is used on all lengths on this drawing.

Label 2 Per specification 107-1645-1

Trace # - Bar Code
 Trace # - Human Readable
 Logo Made in XXXX X-XXXXXXXX-X Part Number
 Country of Origin

This label is used on all lengths on this drawing.

THIS INFORMATION IS CONTROLLED AND IS NOT TO BE RELEASED TO THE PUBLIC OR TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF AMP TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC	
CE	
DIST	16

REV	DATE	BY	APP	DESCRIPTION
1	10/9/2007			Rev Per ECN Add -01 to -04

RESTRICTED TO:

0 PLC
 1 PLC
 2 PLC
 3 PLC
 4, DEC

DRN	Cable Assy Configurator	MATERIAL		HEAT TREAT	
CHK	Jeremy Duncan				
APP	Jeremy Duncan				
NAME	FO C/A - 2 fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex				
SCALE	NTS	SIZE	A2	DRAWING NO.	C-1906093
SHEET	4 of 4		REV	A1	

CAC Customer Layout Rev: D



D
C
B
A