


THIS DRAWING IS A CONTROLLED DOCUMENT
011001

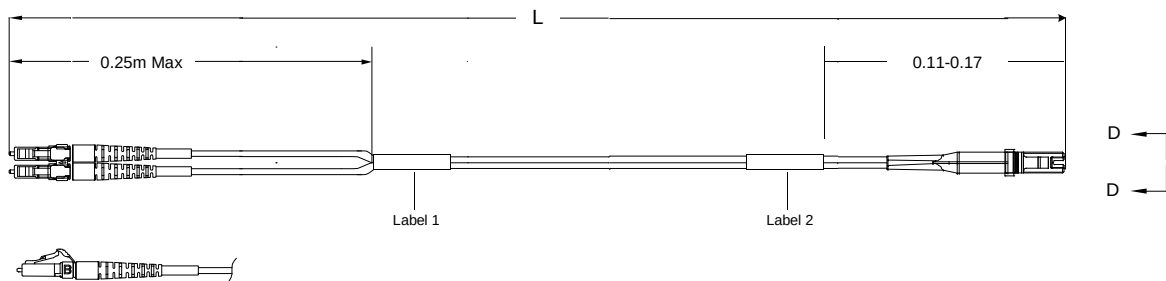


Left Side
Connector(s): LC-Duplex Secure
Mode: MM
Housing Color: Orange
Geom. Spec: N/A

Fiber Path
A - Fiber B
B - Fiber A

- Notes:
- Includes dust caps (not shown on print).
 - OM3 assemblies tested at 850nm, all other multimode tested at 1300nm
 - Label 2 will not be present on any cable assembly less than 5 meters long.

Right Side
Connector(s): MT-RJ (No Pins)
Mode: MM
Housing Color: Black
Geom. Spec: 115-1215



THIS DRAWING IS A CONTROLLED DOCUMENT
011001
Cable Assembly Configuration and Performance to TCO
and TCO2. The drawing is a controlled document. The
drawing is a controlled document. The drawing is a
controlled document. The drawing is a controlled
document. The drawing is a controlled document.
AMP Tyco Electronics Corporation, Harrisburg, PA 17105-3608

LOC
CE
DIST
16

CAC Customer Layout Rev D

REV	DATE	BY	CHK	APP	DESCRIPTION
A1	22/10/11	DK			Rev Per ECR
P	1/11				REVISION RECORD

DIMENSIONS	INCHES	MILLIMETERS
0 PLG	A	
1 PLG	A	
2 PLG	A	
3 PLG	A	
4 PLG	A	

Restricted To:
V

OK Cable Assy Configurator		MATERIAL	HEAT TREAT	
OK	Doug Kirsch	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608		
APP'D	Doug Kirsch			
NAME		FO C/A - 2 fiber, 50/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)		
SCALE	SIZE	DRAWING NO	SHEET	REV
NTS	AZ	C-1907118	1 of 4	A1

8

7

6

5

4

3

2

1

TO AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HANDBURG, PENNSYLVANIA.

Customer Layout Rev. 0

LOC
CE
DIST
16

Part #	L (meters)	L (feet)	LC-Duplex Secure, Orange		MT-RJ (No Pins), Black	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1907118-1	0.950 - 1.050	3.11 - 3.44	0.5	-	0.5	20
0-1907118-2	1.950 - 2.050	6.39 - 6.72	0.5	-	0.5	20
0-1907118-3	2.950 - 3.050	9.67 - 10.00	0.5	-	0.5	20
0-1907118-4	3.920 - 4.080	12.86 - 13.38	0.51	-	0.51	20
0-1907118-5	4.920 - 5.080	16.14 - 16.66	0.51	-	0.51	20
0-1907118-6	5.920 - 6.080	19.42 - 19.94	0.51	-	0.51	20
0-1907118-7	6.920 - 7.080	22.70 - 23.22	0.51	-	0.51	20
0-1907118-8	7.920 - 8.080	25.98 - 26.50	0.51	-	0.51	20
0-1907118-9	8.850 - 9.150	29.03 - 30.01	0.51	-	0.51	20
1-1907118-0	9.850 - 10.150	32.31 - 33.30	0.52	-	0.52	20
1-1907118-1	10.850 - 11.150	35.59 - 36.58	0.52	-	0.52	20
1-1907118-2	11.850 - 12.150	38.87 - 39.86	0.52	-	0.52	20
1-1907118-3	12.850 - 13.150	42.15 - 43.14	0.52	-	0.52	20
1-1907118-4	13.850 - 14.150	45.43 - 46.42	0.52	-	0.52	20
1-1907118-5	14.850 - 15.150	48.72 - 49.70	0.52	-	0.52	20
1-1907118-6	15.840 - 16.160	51.96 - 53.01	0.52	-	0.52	20
1-1907118-7	16.830 - 17.170	55.21 - 56.33	0.53	-	0.53	20
1-1907118-8	17.820 - 18.180	58.46 - 59.64	0.53	-	0.53	20
1-1907118-9	18.810 - 19.190	61.71 - 62.95	0.53	-	0.53	20
2-1907118-0	19.800 - 20.200	64.96 - 66.27	0.53	-	0.53	20
2-1907118-1	20.790 - 21.210	68.20 - 69.58	0.53	-	0.53	20
2-1907118-2	21.780 - 22.220	71.45 - 72.90	0.53	-	0.53	20
2-1907118-3	22.770 - 23.230	74.70 - 76.21	0.53	-	0.53	20
2-1907118-4	23.760 - 24.240	77.95 - 79.52	0.54	-	0.54	20
2-1907118-5	24.750 - 25.250	81.20 - 82.84	0.54	-	0.54	20
2-1907118-6	25.740 - 26.260	84.44 - 86.15	0.54	-	0.54	20
2-1907118-7	26.730 - 27.270	87.69 - 89.46	0.54	-	0.54	20
2-1907118-8	27.720 - 28.280	90.94 - 92.78	0.54	-	0.54	20
2-1907118-9	28.710 - 29.290	94.19 - 96.09	0.54	-	0.54	20
3-1907118-0	29.700 - 30.300	97.44 - 99.40	0.55	-	0.55	20
3-1907118-1	30.690 - 31.310	100.68 - 102.72	0.55	-	0.55	20
3-1907118-2	31.680 - 32.320	103.93 - 106.03	0.55	-	0.55	20
3-1907118-3	32.670 - 33.330	107.18 - 109.35	0.55	-	0.55	20
3-1907118-4	33.660 - 34.340	110.43 - 112.66	0.55	-	0.55	20
3-1907118-5	34.650 - 35.350	113.68 - 115.97	0.55	-	0.55	20
3-1907118-6	35.640 - 36.360	116.92 - 119.29	0.55	-	0.55	20
3-1907118-7	36.630 - 37.370	120.17 - 122.60	0.56	-	0.56	20
3-1907118-8	37.620 - 38.380	123.42 - 125.91	0.56	-	0.56	20
3-1907118-9	38.610 - 39.390	126.67 - 129.23	0.56	-	0.56	20
4-1907118-0	39.600 - 40.400	129.92 - 132.54	0.56	-	0.56	20
4-1907118-1	40.590 - 41.410	133.16 - 135.85	0.56	-	0.56	20
4-1907118-2	41.580 - 42.420	136.41 - 139.17	0.56	-	0.56	20

Qty	U of M	Description	Item No.
2	piece	Trace Label	13
2	piece	Eyelet/Shrink tube assembly - White	14
1	piece	MT-RJ TwinZip Bend Limiting Boot, Beige	12
1	piece	MT-RJ FERRULE, THERMOPLAST,MM	11
AR	meter	2 fiber, 50/125, 1.8mm, Twinzip, Orange, OFNP (Plenum)	10
2	piece	LC Connector Assy, 1.6mm-2.0mm, MM	9
1	piece	LC Duplex clip, black	8
2	piece	LC, SC, FC Straight Boot, Beige	7
1	piece	CRIMP EYELET, MT-RJ	6
1	piece	MT-RJ, SPRING PUSH, UNIVERSAL	5
1	piece	PIN KEEPER, 3.8MM	4
1	piece	SPRING, MT-RJ, 3.8 DESIGN	3
1	piece	DUST COVER, MT-RJ	2
1	piece	HOUSING, CONN, MT-RJ BLACK	1

										meters		OTHERWISE SPECIFIED:		Doug Kirsch		AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
												1 P/LC 2 P/LC 3 P/LC 4 P/LC 5 P/LC 6 P/LC 7 P/LC 8 P/LC		APID Doug Kirsch MAC FC C/A - 2 fiber, 50/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pin)			
P L/R Rev Per Ech# RELEASE 2/21/2011 - OK										Restricted To:		NALS Issue PLANNING NO. C 1907118 DATE A2		(SHEET) 2 of 4 REV A1			

THIS DRAWING IS A CONTROLLED DOCUMENT

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS, INC. AND ITS SUBSIDIARIES. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED HEREIN. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT WRITTEN PERMISSION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

CAC Customer Layout Rev D

Part #	L (meters)	L (feet)	LC-Duplex Secure, Orange		MT-RJ (No Pins), Black	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
4-1907118-3	42.570 - 43.430	139.66 - 142.48	0.56	-	0.56	20
4-1907118-4	43.560 - 44.440	142.91 - 145.80	0.57	-	0.57	20
4-1907118-5	44.550 - 45.450	146.16 - 149.11	0.57	-	0.57	20
4-1907118-6	45.540 - 46.460	149.40 - 152.42	0.57	-	0.57	20
4-1907118-7	46.530 - 47.470	152.65 - 155.74	0.57	-	0.57	20
4-1907118-8	47.520 - 48.480	155.90 - 159.05	0.57	-	0.57	20
4-1907118-9	48.510 - 49.490	159.15 - 162.36	0.57	-	0.57	20
5-1907118-0	49.500 - 50.500	162.40 - 165.68	0.58	-	0.58	20
5-1907118-1	50.490 - 51.510	165.64 - 168.99	0.58	-	0.58	20
5-1907118-2	51.480 - 52.520	168.89 - 172.30	0.58	-	0.58	20
5-1907118-3	52.470 - 53.530	172.14 - 175.62	0.58	-	0.58	20
5-1907118-4	53.460 - 54.540	175.39 - 178.93	0.58	-	0.58	20
5-1907118-5	54.450 - 55.550	178.64 - 182.25	0.58	-	0.58	20
5-1907118-6	55.440 - 56.560	181.88 - 185.56	0.58	-	0.58	20
5-1907118-7	56.430 - 57.570	185.13 - 188.87	0.59	-	0.59	20
5-1907118-8	57.420 - 58.580	188.38 - 192.19	0.59	-	0.59	20
5-1907118-9	58.410 - 59.590	191.63 - 195.50	0.59	-	0.59	20
6-1907118-0	59.400 - 60.600	194.88 - 198.81	0.59	-	0.59	20
6-1907118-1	60.390 - 61.610	198.12 - 202.13	0.59	-	0.59	20
6-1907118-2	61.380 - 62.620	201.37 - 205.44	0.59	-	0.59	20
6-1907118-3	62.370 - 63.630	204.62 - 208.75	0.59	-	0.59	20
6-1907118-4	63.360 - 64.640	207.87 - 212.07	0.6	-	0.6	20
6-1907118-5	64.350 - 65.650	211.12 - 215.38	0.6	-	0.6	20
6-1907118-6	65.340 - 66.660	214.37 - 218.70	0.6	-	0.6	20
6-1907118-7	66.330 - 67.670	217.61 - 222.01	0.6	-	0.6	20
6-1907118-8	67.320 - 68.680	220.86 - 225.32	0.6	-	0.6	20
6-1907118-9	68.310 - 69.690	224.11 - 228.64	0.6	-	0.6	20
7-1907118-0	69.300 - 70.700	227.36 - 231.95	0.61	-	0.61	20
7-1907118-1	70.290 - 71.710	230.61 - 235.26	0.61	-	0.61	20
7-1907118-2	71.280 - 72.720	233.85 - 238.58	0.61	-	0.61	20
7-1907118-3	72.270 - 73.730	237.10 - 241.89	0.61	-	0.61	20
7-1907118-4	73.260 - 74.740	240.35 - 245.20	0.61	-	0.61	20
7-1907118-5	74.250 - 75.750	243.60 - 248.52	0.61	-	0.61	20
7-1907118-6	75.240 - 76.760	246.85 - 251.83	0.61	-	0.61	20
7-1907118-7	76.230 - 77.770	250.09 - 255.15	0.62	-	0.62	20
7-1907118-8	77.220 - 78.780	253.34 - 258.46	0.62	-	0.62	20
7-1907118-9	78.210 - 79.790	256.59 - 261.77	0.62	-	0.62	20
8-1907118-0	79.200 - 80.800	259.84 - 265.09	0.62	-	0.62	20
8-1907118-1	1.450 - 1.550	4.75 - 5.08	0.5	-	0.5	20

AL	Rev Per ECR	RELEASE	2/21/2011	-	DK
P	LIR	REVISION RECORD	DATE	DN	APD

RESTRICTED TO:

Y

DN Cable Assy Configurator	MATERIAL -	HEAT TREAT -
DK Doug Kirsch	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
APD Doug Kirsch		
NAME FO C/A - Z fiber, 50/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)		
SCALE NTS	SIZE A2	DRAWING NO C-1907118
		SHEET 3 of 4
		REV A1

8 7 6 5 4 3 2 1

THIS DRAWING IS A CONTROLLED DOCUMENT

THIS INFORMATION IS CONTAINED HEREIN AND IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED FOR THE PURPOSES SPECIFIED HEREIN ONLY. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT WRITTEN PERMISSION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

CAC Customer Layout Rev D

8

7

6

5

4


3

2

1

Label 1

Per specification 107-1645-1



Trace # - Bar Code
Trace # - Human Readable
Part Number
Country of Origin

This label is used on all lengths on this drawing.

Label 2

Per specification 107-1645-1



Trace # - Bar Code
Trace # - Human Readable
Part Number
Country of Origin

This label is used on all lengths on this drawing.

AL	Rev Per ECR	RELEASE	2/21/2011	-	DK
P	LIR	REVISION RECORD	DATE	DN	APID

DIMENSIONS meters	INCHES OTHERWISE SPECIFIED
Ø	PLC
1	PLC
2	PLC
3	PLC
4	PLC

Restricted To:
Y

OK Cable Assy Configurator		MATERIAL	-	HEAT TREAT	
OK	Doug Kirsch	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APID	Doug Kirsch				
NAME	FO C/A - 2 fiber, 50/125, OFNP (Plenum) jacket, LC-Duplex Secure to MT-RJ (No Pins)				
SCALE	NTS	SIZE	AZ	DRAWING NO	C-1907118
				SHEET	4 of 4
				REV	A1