



THIS DRAWING IS A CONTROLLED DOCUMENT

USE ON

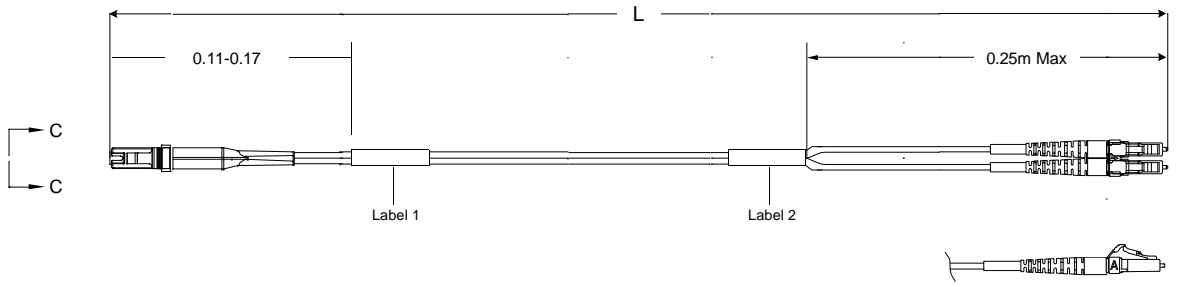

**Left Side**

Connector(s): MT-RJ SECURE (No Pins)  
 Mode: MM  
 Housing Color: Orange  
 Geom. Spec: 115-1215



**Fiber Path**

Fiber A - - B  
 Fiber B - - A

- Notes:
- 1 IL tested at 1300nm.
  - 2 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
  - 3 Label 2 will not be present on any cable assembly less than 5 meters long.
  - 4 Includes dust caps (not shown on print).

**Right Side**

Connector(s): LC-Duplex  
 Mode: MM  
 Housing Color: Beige  
 Geom. Spec: N/A

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS, INC. IT IS TO BE KEPT STRICTLY CONFIDENTIAL AND NOT TO BE DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC  
 CE/IT  
 DIST  
 16

REV	DESCRIPTION	DATE	BY	APP'D
A	Rev Per ECH RELEASE	3/28/2008	JD	
P	LR	REVISION REQ'D	DATE	BY

DIMENSIONS meters		TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:	
Ø	PLC	±	-
□	PLC	±	-
□	PLC	±	-
□	PLC	±	-
□	PLC	±	-
□	PLC	±	-
□	PLC	±	-
□	PLC	±	-
□	PLC	±	-

Restricted To:  
 v

DR	Cable Assy Configurator	MATERIAL	HEAT TREAT
DR	Joe Davis		
APP'D	Joe Davis	Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, MT-RJ SECURE (No Pins) to LC-Duplex		
SCALE	NTS	SIZE	A2
DRAWING NO.	C-1918679	SHEET	1 of 3
REV	A		

CAC Customer Layout Rev: D

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

THIS DRAWING IS A CONTROLLED DOCUMENT

USE ON

Part #	L (meters)	L (feet)	MT-RJ SECURE (No Pins), Orange		LC-Duplex, Beige	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1918679-1	0.950 - 1.050	3.11 - 3.44	0.5	20	0.5	-
0-1918679-2	1.950 - 2.050	6.39 - 6.72	0.5	20	0.5	-
0-1918679-3	2.950 - 3.050	9.67 - 10.00	0.5	20	0.5	-
0-1918679-4	3.920 - 4.080	12.86 - 13.38	0.51	20	0.51	-
0-1918679-5	4.920 - 5.080	16.14 - 16.66	0.51	20	0.51	-
0-1918679-6	5.920 - 6.080	19.42 - 19.94	0.51	20	0.51	-
0-1918679-7	6.920 - 7.080	22.70 - 23.22	0.51	20	0.51	-
0-1918679-8	7.920 - 8.080	25.98 - 26.50	0.51	20	0.51	-
0-1918679-9	8.850 - 9.150	29.03 - 30.01	0.51	20	0.51	-
1-1918679-0	9.850 - 10.150	32.31 - 33.30	0.52	20	0.52	-
1-1918679-1	10.850 - 11.150	35.59 - 36.58	0.52	20	0.52	-
1-1918679-2	11.850 - 12.150	38.87 - 39.86	0.52	20	0.52	-
1-1918679-3	12.850 - 13.150	42.15 - 43.14	0.52	20	0.52	-
1-1918679-4	13.850 - 14.150	45.43 - 46.42	0.52	20	0.52	-
1-1918679-5	14.850 - 15.150	48.72 - 49.70	0.52	20	0.52	-
1-1918679-6	15.840 - 16.160	51.96 - 53.01	0.52	20	0.52	-
1-1918679-7	16.830 - 17.170	55.21 - 56.33	0.53	20	0.53	-
1-1918679-8	17.820 - 18.180	58.46 - 59.64	0.53	20	0.53	-
1-1918679-9	18.810 - 19.190	61.71 - 62.95	0.53	20	0.53	-
2-1918679-0	19.800 - 20.200	64.96 - 66.27	0.53	20	0.53	-
2-1918679-1	20.790 - 21.210	68.20 - 69.58	0.53	20	0.53	-
2-1918679-2	21.780 - 22.220	71.45 - 72.90	0.53	20	0.53	-
2-1918679-3	22.770 - 23.230	74.70 - 76.21	0.53	20	0.53	-
2-1918679-4	23.760 - 24.240	77.95 - 79.52	0.54	20	0.54	-
2-1918679-5	24.750 - 25.250	81.20 - 82.84	0.54	20	0.54	-
2-1918679-6	25.740 - 26.260	84.44 - 86.15	0.54	20	0.54	-
2-1918679-7	26.730 - 27.270	87.69 - 89.46	0.54	20	0.54	-
2-1918679-8	27.720 - 28.280	90.94 - 92.78	0.54	20	0.54	-
2-1918679-9	28.710 - 29.290	94.19 - 96.09	0.54	20	0.54	-
3-1918679-0	29.700 - 30.300	97.44 - 99.40	0.55	20	0.55	-
3-1918679-1	30.690 - 31.310	100.68 - 102.72	0.55	20	0.55	-
3-1918679-2	31.680 - 32.320	103.93 - 106.03	0.55	20	0.55	-
3-1918679-3	32.670 - 33.330	107.18 - 109.35	0.55	20	0.55	-
3-1918679-4	33.660 - 34.340	110.43 - 112.66	0.55	20	0.55	-
3-1918679-5	34.650 - 35.350	113.68 - 115.97	0.55	20	0.55	-
3-1918679-6	35.640 - 36.360	116.92 - 119.29	0.55	20	0.55	-
3-1918679-7	36.630 - 37.370	120.17 - 122.60	0.56	20	0.56	-
3-1918679-8	37.620 - 38.380	123.42 - 125.91	0.56	20	0.56	-
3-1918679-9	38.610 - 39.390	126.67 - 129.23	0.56	20	0.56	-
4-1918679-0	39.600 - 40.400	129.92 - 132.54	0.56	20	0.56	-
5-1918679-0	49.500 - 50.500	162.40 - 165.68	0.58	20	0.58	-

Qty	U of M	Description	Item No.
2	piece	Trace Label	14
2	piece	Eyelet/Shrink tube assembly - White	13
1	piece	MT-RJ TwinZip Bend Limiting Boot, Beige	12
AR	meter	2 fiber, 62.5/125, 1.8 mm, Twinzip, Orange, OFNR (Riser)	11
1	piece	MT-RJ FERRULE, THERMOPLAST,MM	10
2	piece	LC Connector Assy, MM	9
1	piece	LC Duplex clip, black	8
2	piece	LC, SC, FC Straight Boot, Beige	7
1	piece	MT-RJ Keyed Connector Housing - Orange	6
1	piece	CRIMP EYELET, MT-RJ	5
1	piece	MT-RJ, SPRING PUSH, UNIVERSAL	4
1	piece	PIN KEEPER, 3.8MM	3
1	piece	SPRING, MT-RJ, 3.8 DESIGN	2
1	piece	DUST COVER, MT-RJ	1

THIS INFORMATION IS CONTROLLED. IT IS THE PROPERTY OF AMP AND IS NOT TO BE DISCLOSED TO ANY OTHER PARTY WITHOUT THE WRITTEN PERMISSION OF AMP. THIS DRAWING IS A CONTROLLED DOCUMENT.

LOC  
CET  
DIST  
16

DIMENSIONS meters		IS MANUFACTURED OR EQUIVALENT		Cable Assy Configurator		MATERIAL		HEAT TREAT	
				Joe Davis					
				Joe Davis		AMP		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
				REV PER ECH		FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, MT-RJ SECURE (No Pins) to LC-Duplex			
A		LIR		RELEASE		3/28/2008		DATE	
P		LIR		REVISION RECORD		DATE		DIN	
								Restricted To:	
								SCALE	
								NTS	
								SIZE	
								A2	
								DRAWING NO	
								C-1918679	
								SHEET	
								2 of 3	
								REV	
								A	

CAC Customer Layout Rev: D

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

D  
C  
B  
A

USE ON

**Label 1** Per specification 107-1645-1

Trace # - Bar Code  
 Trace # - Human Readable  
 Part Number  
 Country of Origin

This label is used on all lengths on this drawing.

**Label 2** Per specification 107-1645-1

Trace # - Bar Code  
 Trace # - Human Readable  
 Part Number  
 Country of Origin

This label is used on all lengths on this drawing.

THIS DRAWING IS A CONTROLLED DOCUMENT

THIS INFORMATION IS CONFIDENTIAL AND IS THE PROPERTY OF AMP. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED IN THIS DRAWING. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. AMP ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC	
CE	
DIST	16

DIMENSIONS millimeters		TO FINISH UNLESS OTHERWISE SPECIFIED		DR		Cable Assy Configurator		MATERIAL		HEAT TREAT	
0		PLC		Joe Davis		Joe Davis		AMP		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
1		PLC		Joe Davis		Joe Davis		AMP		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
2		PLC		Joe Davis		Joe Davis		AMP		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
3		PLC		Joe Davis		Joe Davis		AMP		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
4		PLC		Joe Davis		Joe Davis		AMP		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
5		PLC		Joe Davis		Joe Davis		AMP		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
6		PLC		Joe Davis		Joe Davis		AMP		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
7		PLC		Joe Davis		Joe Davis		AMP		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
8		PLC		Joe Davis		Joe Davis		AMP		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	

REV	DATE	BY	APP'D	DESCRIPTION
A	3/28/2008	JD		Rev Per EC# RELEASE
P				REVISION RECEIVED

Restricted To:  
v

SCALE	SIZE	DRAWING NO.	SHEET	REV
NTS	A2	C-1918679	3 of 3	A

CAC Customer Layout Rev: D

8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---