


THIS DRAWING IS A CONTROLLED DOCUMENT [000001]

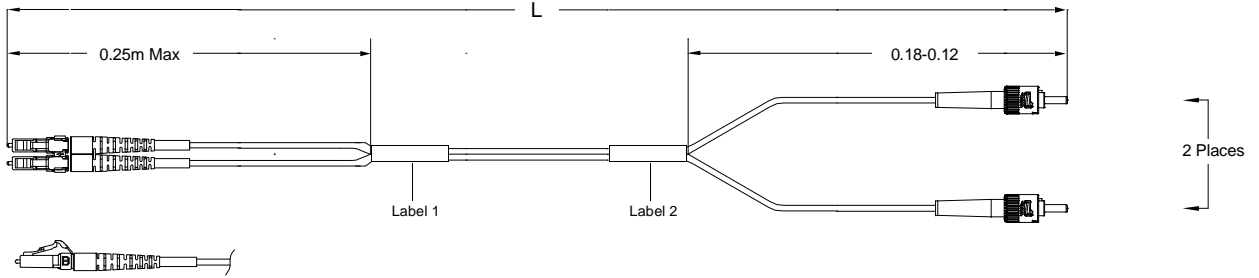

Left Side
 Connector(s): LC-Duplex Secure
 Mode: MM
 Housing Color: Yellow
 Geom. Spec: N/A

Fiber Path
 A - B
 B - A

Right Side
 Connector(s): ST
 Mode: MM
 Housing Color: N/A
 Geom. Spec: N/A

- Notes:
- 1 Includes dust caps (not shown on print).
 - 2 Label 2 will not be present on any cable assembly less than 5 meters long.
 - 3 OM3 assemblies tested at 850nm, all other multimode tested at 1300nm

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO AMP. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED IN THIS DRAWING AND IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. AMP ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC
 CE/IT
 DIST
 16

REV	DATE	BY	APP'D	DESCRIPTION
A	2/14/2009	JS		Rev Per EC# RELEASE
P				REVISION RECORD

DIMENSIONS meters		TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:	
Ø	PLC	±	-
□	PLC	±	-
□	PLC	±	-
□	PLC	±	-
±	EDGE	±	-

Restricted To:
 v

DR	Cable Assy Configurator	MATERIAL	HEAT TREAT
DR	Jeff Shipe		
APP'D	Jeff Shipe	Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - Z fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to ST		
SCALE	NTS	SIZE	A2
DRAWING NO.	C-1906082	SHEET	1 of 4
REV	A		

CAC Customer Layout Rev: D

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

D
C
B
A

THIS DRAWING IS A CONTROLLED DOCUMENT

USE ON

Part #	L (meters)	L (feet)	LC-Duplex Secure, Yellow		ST	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1906082-1	0.950 - 1.050	3.11 - 3.44	0.5	-	0.5	-
0-1906082-2	1.950 - 2.050	6.39 - 6.72	0.5	-	0.5	-
0-1906082-3	2.950 - 3.050	9.67 - 10.00	0.5	-	0.5	-
0-1906082-4	3.920 - 4.080	12.86 - 13.38	0.51	-	0.51	-
0-1906082-5	4.920 - 5.080	16.14 - 16.66	0.51	-	0.51	-
0-1906082-6	5.920 - 6.080	19.42 - 19.94	0.51	-	0.51	-
0-1906082-7	6.920 - 7.080	22.70 - 23.22	0.51	-	0.51	-
0-1906082-8	7.920 - 8.080	25.98 - 26.50	0.51	-	0.51	-
0-1906082-9	8.850 - 9.150	29.03 - 30.01	0.51	-	0.51	-
1-1906082-0	9.850 - 10.150	32.31 - 33.30	0.52	-	0.52	-
1-1906082-1	10.850 - 11.150	35.59 - 36.58	0.52	-	0.52	-
1-1906082-2	11.850 - 12.150	38.87 - 39.86	0.52	-	0.52	-
1-1906082-3	12.850 - 13.150	42.15 - 43.14	0.52	-	0.52	-
1-1906082-4	13.850 - 14.150	45.43 - 46.42	0.52	-	0.52	-
1-1906082-5	14.850 - 15.150	48.72 - 49.70	0.52	-	0.52	-
1-1906082-6	15.840 - 16.160	51.96 - 53.01	0.52	-	0.52	-
1-1906082-7	16.830 - 17.170	55.21 - 56.33	0.53	-	0.53	-
1-1906082-8	17.820 - 18.180	58.46 - 59.64	0.53	-	0.53	-
1-1906082-9	18.810 - 19.190	61.71 - 62.95	0.53	-	0.53	-
2-1906082-0	19.800 - 20.200	64.96 - 66.27	0.53	-	0.53	-
2-1906082-1	20.790 - 21.210	68.20 - 69.58	0.53	-	0.53	-
2-1906082-2	21.780 - 22.220	71.45 - 72.90	0.53	-	0.53	-
2-1906082-3	22.770 - 23.230	74.70 - 76.21	0.53	-	0.53	-
2-1906082-4	23.760 - 24.240	77.95 - 79.52	0.54	-	0.54	-
2-1906082-5	24.750 - 25.250	81.20 - 82.84	0.54	-	0.54	-
2-1906082-6	25.740 - 26.260	84.44 - 86.15	0.54	-	0.54	-
2-1906082-7	26.730 - 27.270	87.69 - 89.46	0.54	-	0.54	-
2-1906082-8	27.720 - 28.280	90.94 - 92.78	0.54	-	0.54	-
2-1906082-9	28.710 - 29.290	94.19 - 96.09	0.54	-	0.54	-
3-1906082-0	29.700 - 30.300	97.44 - 99.40	0.55	-	0.55	-
3-1906082-1	30.690 - 31.310	100.68 - 102.72	0.55	-	0.55	-
3-1906082-2	31.680 - 32.320	103.93 - 106.03	0.55	-	0.55	-
3-1906082-3	32.670 - 33.330	107.18 - 109.35	0.55	-	0.55	-
3-1906082-4	33.660 - 34.340	110.43 - 112.66	0.55	-	0.55	-
3-1906082-5	34.650 - 35.350	113.68 - 115.97	0.55	-	0.55	-
3-1906082-6	35.640 - 36.360	116.92 - 119.29	0.55	-	0.55	-
3-1906082-7	36.630 - 37.370	120.17 - 122.60	0.56	-	0.56	-
3-1906082-8	37.620 - 38.380	123.42 - 125.91	0.56	-	0.56	-
3-1906082-9	38.610 - 39.390	126.67 - 129.23	0.56	-	0.56	-
4-1906082-0	39.600 - 40.400	129.92 - 132.54	0.56	-	0.56	-
4-1906082-1	40.590 - 41.410	133.16 - 135.85	0.56	-	0.56	-
4-1906082-2	41.580 - 42.420	136.41 - 139.17	0.56	-	0.56	-

Qty	U of M	Description	Item No.
2	piece	Trace Label	13
2	piece	Eyelet/Shrink tube assembly - White	12
AR	meter	2 Fiber, XG-50/125, 2.0mm, Twinzip, Aqua, OFNR (Riser)	11
2	piece	PVC Build-up tubing	10
2	piece	2.5mm ferrule cover	9
2	piece	ST Connector, Ceramic, Polymer Nut	8
2	piece	ST Short Boot - 1.6 to 2.0mm, Beige	7
2	piece	Crimp Eyelet	6
0.0139	sheet	Leg Label - "B"	5
0.0139	sheet	Leg Label - "A"	4
2	piece	LC Connector Assy, 1.6mm-2.0mm, MM	3
1	piece	LC Duplex clip, black	2
2	piece	LC, SC, FC Straight Boot, Beige	1

THIS INFORMATION IS CONTROLLED INFORMATION TO THE EXTENT THAT IT IS UNCLASSIFIED AND IS THE PROPERTY OF AMP. IT IS TO BE KEPT UNCLASSIFIED AND CONTROLLED IN ACCORDANCE WITH THE POLICY OF AMP. IT IS TO BE KEPT UNCLASSIFIED AND CONTROLLED IN ACCORDANCE WITH THE POLICY OF AMP. IT IS TO BE KEPT UNCLASSIFIED AND CONTROLLED IN ACCORDANCE WITH THE POLICY OF AMP.

LOC
CE
DIST
16

Cable Assy Configurator		MATERIAL	HEAT TREAT
Jeff Shipe			
AMP		Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
FO C/A - Z fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to ST			
Restricted To:		SCALE	SHEET
v		NTS	2 of 4
DATE		DRAWING NO.	REV
2/14/2009		C-1906082	A

THIS DRAWING IS A CONTROLLED DOCUMENT

USE ON

Part #	L (meters)	L (feet)	LC-Duplex Secure, Yellow		ST	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
4-1906082-3	42.570 - 43.430	139.66 - 142.48	0.56	-	0.56	-
4-1906082-4	43.560 - 44.440	142.91 - 145.80	0.57	-	0.57	-
4-1906082-5	44.550 - 45.450	146.16 - 149.11	0.57	-	0.57	-
4-1906082-6	45.540 - 46.460	149.40 - 152.42	0.57	-	0.57	-
4-1906082-7	46.530 - 47.470	152.65 - 155.74	0.57	-	0.57	-
4-1906082-8	47.520 - 48.480	155.90 - 159.05	0.57	-	0.57	-
4-1906082-9	48.510 - 49.490	159.15 - 162.36	0.57	-	0.57	-
5-1906082-0	49.500 - 50.500	162.40 - 165.68	0.58	-	0.58	-
5-1906082-1	50.490 - 51.510	165.64 - 168.99	0.58	-	0.58	-
5-1906082-2	51.480 - 52.520	168.89 - 172.30	0.58	-	0.58	-
5-1906082-3	52.470 - 53.530	172.14 - 175.62	0.58	-	0.58	-
5-1906082-4	53.460 - 54.540	175.39 - 178.93	0.58	-	0.58	-
5-1906082-5	54.450 - 55.550	178.64 - 182.25	0.58	-	0.58	-
5-1906082-6	55.440 - 56.560	181.88 - 185.56	0.58	-	0.58	-
5-1906082-7	56.430 - 57.570	185.13 - 188.87	0.59	-	0.59	-
5-1906082-8	57.420 - 58.580	188.38 - 192.19	0.59	-	0.59	-
5-1906082-9	58.410 - 59.590	191.63 - 195.50	0.59	-	0.59	-
6-1906082-0	59.400 - 60.600	194.88 - 198.81	0.59	-	0.59	-
6-1906082-1	60.390 - 61.610	198.12 - 202.13	0.59	-	0.59	-
6-1906082-2	61.380 - 62.620	201.37 - 205.44	0.59	-	0.59	-
6-1906082-3	62.370 - 63.630	204.62 - 208.75	0.59	-	0.59	-
6-1906082-4	63.360 - 64.640	207.87 - 212.07	0.6	-	0.6	-
6-1906082-5	64.350 - 65.650	211.12 - 215.38	0.6	-	0.6	-
6-1906082-6	65.340 - 66.660	214.37 - 218.70	0.6	-	0.6	-
6-1906082-7	66.330 - 67.670	217.61 - 222.01	0.6	-	0.6	-
6-1906082-8	67.320 - 68.680	220.86 - 225.32	0.6	-	0.6	-
6-1906082-9	68.310 - 69.690	224.11 - 228.64	0.6	-	0.6	-
7-1906082-0	69.300 - 70.700	227.36 - 231.95	0.61	-	0.61	-
7-1906082-1	70.290 - 71.710	230.61 - 235.26	0.61	-	0.61	-
7-1906082-2	71.280 - 72.720	233.85 - 238.58	0.61	-	0.61	-
7-1906082-3	72.270 - 73.730	237.10 - 241.89	0.61	-	0.61	-
7-1906082-4	73.260 - 74.740	240.35 - 245.20	0.61	-	0.61	-
7-1906082-5	74.250 - 75.750	243.60 - 248.52	0.61	-	0.61	-
7-1906082-6	75.240 - 76.760	246.85 - 251.83	0.61	-	0.61	-
7-1906082-7	76.230 - 77.770	250.09 - 255.15	0.62	-	0.62	-
7-1906082-8	77.220 - 78.780	253.34 - 258.46	0.62	-	0.62	-
7-1906082-9	78.210 - 79.790	256.59 - 261.77	0.62	-	0.62	-
8-1906082-0	79.200 - 80.800	259.84 - 265.09	0.62	-	0.62	-

THIS INFORMATION IS CONTROLLED AND IS NOT TO BE RELEASED TO THE PUBLIC OR TO ANY OTHER ENTITY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMP TYCO ELECTRONICS CORPORATION. ANY UNAUTHORIZED DISSEMINATION OF THIS INFORMATION IS PROHIBITED AND WILL BE PROSECUTED TO THE FULL EXTENT OF THE LAW.

LOC
CET
DIST
16

DIMENSIONS meters		IS PLACES UNLESS OTHERWISE SPECIFIED	
0	PLC	-	-
1	PLC	-	-
2	PLC	-	-
3	PLC	-	-
4	ESC	-	-

DR	Cable Assy Configurator	MATERIAL	-	HEAT TREAT	-
DR	Jeff Shipe	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APPD	Jeff Shipe				
NAME	FO C/A - Z fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to ST				
SCALE	NTS	SIZE	A2	DRAWING NO.	C-1906082
SHEET	3 of 4		REV	A	

Restricted To: _____

Rev Per ECh RELEASE 2/14/2009 JS

REVISION RECORD DATE DR APPD

CAC Customer Layout Rev: D

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

D
C
B
A

THIS DRAWING IS A CONTROLLED DOCUMENT

THIS INFORMATION IS CONFIDENTIAL AND IS NOT TO BE RELEASED TO THE PUBLIC OR TO ANY OTHER PERSON OR ORGANIZATION WITHOUT THE WRITTEN PERMISSION OF AMP TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

Label 1 Per specification 107-1645-1

Trace # - Bar Code
 Trace # - Human Readable
 Logo Made in XXXX X-XXXXXXX-X
 Part Number
 Country of Origin

This label is used on all lengths on this drawing.

Label 2 Per specification 107-1645-1

Trace # - Bar Code
 Trace # - Human Readable
 Logo Made in XXXX X-XXXXXXX-X
 Part Number
 Country of Origin

This label is used on all lengths on this drawing.

LOC
 CE / M
 DIST
 16

DIMENSIONS millimeters		IS IN UNITS UNLESS OTHERWISE SPECIFIED		DRW Cable Assy Configurator		MATERIAL -		HEAT TREAT -	
0 PLG		-		DRW Jeff Shipe		AMP Tyco Electronics, Inc.		Harrisburg, PA 17105-3608	
1 PLG		-		APPD Jeff Shipe		FO C/A - Z fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex		Secure to ST	
2 PLG		-		DATE 2/14/2009		DRW JS		RESTRICTED TO:	
3 PLG		-		REV Per ECH RELEASE		SCALE NTS		SIZE A2	
4 PLG		-		REVISION RECORD		DRAWING NO. C-1906082		SHEET 4 of 4	
5		-		P L/R		REV A		REV A	

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

CAC Customer Layout Rev: D

D
C
B
A