


THIS DRAWING IS A CONTROLLED DOCUMENT. CONTROL NUMBER: 1906055

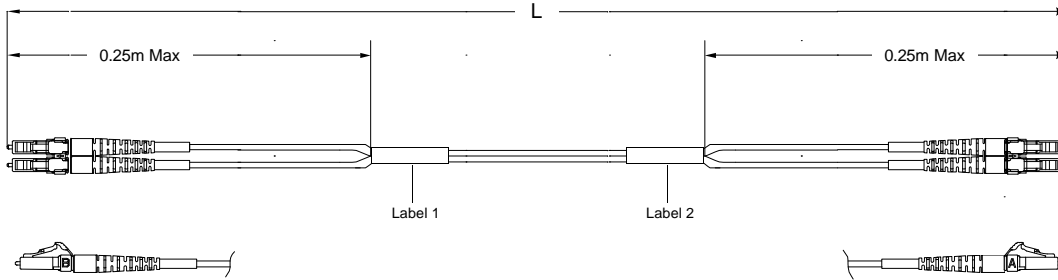

**Left Side**  
 Connector(s): LC-Duplex Secure  
 Mode: MM  
 Housing Color: Orange  
 Geom. Spec: N/A

**Fiber Path**  
 A - \_\_\_\_\_ - B  
 B - \_\_\_\_\_ - A

**Right Side**  
 Connector(s): LC-Duplex  
 Mode: MM  
 Housing Color: Beige  
 Geom. Spec: N/A

- Notes:
- 1 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
  - 2 Includes dust caps (not shown on print).
  - 3 IL tested at 1300nm.
  - 4 Label 2 will not be present on any cable assembly less than 5 meters long.

THIS DRAWING IS CONTROLLED. ANY INFORMATION TO BE ADDED TO THIS DRAWING MUST BE APPROVED BY THE ORIGINAL DRAWING ENGINEER OR A QUALIFIED ENGINEER. ANY CHANGES TO THIS DRAWING MUST BE APPROVED BY THE ORIGINAL DRAWING ENGINEER OR A QUALIFIED ENGINEER. ANY CHANGES TO THIS DRAWING MUST BE APPROVED BY THE ORIGINAL DRAWING ENGINEER OR A QUALIFIED ENGINEER. ANY CHANGES TO THIS DRAWING MUST BE APPROVED BY THE ORIGINAL DRAWING ENGINEER OR A QUALIFIED ENGINEER.

LOC  
 C/M  
 DIST  
 16

P	REV	REVISION RECORD	DATE	BY	APP'D
A	1	Rev Per ECR RELEASE	02/26/2007		JD

RESTRICTED TO:

0 PLC  
 1 PLC  
 2 PLC  
 3 PLC  
 4,5,6

DRW	Cable Assy Configurator	MATERIAL	HEAT TREAT
CHK	Jeremy Duncan		
APP'D	Jeremy Duncan	<b>AMP</b> Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex		
SCALE	SIZE	DRAWING NO.	SHEET
NTS	A2	C-1906055	1 of 4
			REV
			A

CAC Customer Layout Rev: D

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

D  
C  
B  
A

USE ON

THIS DRAWING IS A CONTROLLED DOCUMENT.

Part #	L (meters)	L (feet)	LC-Duplex Secure, Orange		LC-Duplex, Beige	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1906055-1	0.950 - 1.050	3.11 - 3.44	0.5	-	0.5	-
0-1906055-2	1.950 - 2.050	6.39 - 6.72	0.5	-	0.5	-
0-1906055-3	2.950 - 3.050	9.67 - 10.00	0.5	-	0.5	-
0-1906055-4	3.920 - 4.080	12.86 - 13.38	0.51	-	0.51	-
0-1906055-5	4.920 - 5.080	16.14 - 16.66	0.51	-	0.51	-
0-1906055-6	5.920 - 6.080	19.42 - 19.94	0.51	-	0.51	-
0-1906055-7	6.920 - 7.080	22.70 - 23.22	0.51	-	0.51	-
0-1906055-8	7.920 - 8.080	25.98 - 26.50	0.51	-	0.51	-
0-1906055-9	8.850 - 9.150	29.03 - 30.01	0.51	-	0.51	-
1-1906055-0	9.850 - 10.150	32.31 - 33.30	0.52	-	0.52	-
1-1906055-1	10.850 - 11.150	35.59 - 36.58	0.52	-	0.52	-
1-1906055-2	11.850 - 12.150	38.87 - 39.86	0.52	-	0.52	-
1-1906055-3	12.850 - 13.150	42.15 - 43.14	0.52	-	0.52	-
1-1906055-4	13.850 - 14.150	45.43 - 46.42	0.52	-	0.52	-
1-1906055-5	14.850 - 15.150	48.72 - 49.70	0.52	-	0.52	-
1-1906055-6	15.840 - 16.160	51.96 - 53.01	0.52	-	0.52	-
1-1906055-7	16.830 - 17.170	55.21 - 56.33	0.53	-	0.53	-
1-1906055-8	17.820 - 18.180	58.46 - 59.64	0.53	-	0.53	-
1-1906055-9	18.810 - 19.190	61.71 - 62.95	0.53	-	0.53	-
2-1906055-0	19.800 - 20.200	64.96 - 66.27	0.53	-	0.53	-
2-1906055-1	20.790 - 21.210	68.20 - 69.58	0.53	-	0.53	-
2-1906055-2	21.780 - 22.220	71.45 - 72.90	0.53	-	0.53	-
2-1906055-3	22.770 - 23.230	74.70 - 76.21	0.53	-	0.53	-
2-1906055-4	23.760 - 24.240	77.95 - 79.52	0.54	-	0.54	-
2-1906055-5	24.750 - 25.250	81.20 - 82.84	0.54	-	0.54	-
2-1906055-6	25.740 - 26.260	84.44 - 86.15	0.54	-	0.54	-
2-1906055-7	26.730 - 27.270	87.69 - 89.46	0.54	-	0.54	-
2-1906055-8	27.720 - 28.280	90.94 - 92.78	0.54	-	0.54	-
2-1906055-9	28.710 - 29.290	94.19 - 96.09	0.54	-	0.54	-
3-1906055-0	29.700 - 30.300	97.44 - 99.40	0.55	-	0.55	-
3-1906055-1	30.690 - 31.310	100.68 - 102.72	0.55	-	0.55	-
3-1906055-2	31.680 - 32.320	103.93 - 106.03	0.55	-	0.55	-
3-1906055-3	32.670 - 33.330	107.18 - 109.35	0.55	-	0.55	-
3-1906055-4	33.660 - 34.340	110.43 - 112.66	0.55	-	0.55	-
3-1906055-5	34.650 - 35.350	113.68 - 115.97	0.55	-	0.55	-
3-1906055-6	35.640 - 36.360	116.92 - 119.29	0.55	-	0.55	-
3-1906055-7	36.630 - 37.370	120.17 - 122.60	0.56	-	0.56	-
3-1906055-8	37.620 - 38.380	123.42 - 125.91	0.56	-	0.56	-
3-1906055-9	38.610 - 39.390	126.67 - 129.23	0.56	-	0.56	-
4-1906055-0	39.600 - 40.400	129.92 - 132.54	0.56	-	0.56	-
4-1906055-1	40.590 - 41.410	133.16 - 135.85	0.56	-	0.56	-
4-1906055-2	41.580 - 42.420	136.41 - 139.17	0.56	-	0.56	-

Qty	U of M	Description	Item No.
2	piece	Trace Label	7
4	piece	Eyelet/Shrink tube assembly - White	6
AR	meter	2 fiber, 62.5/125, 2.0mm, Twinzip, Orange, OFNR (Riser)	5
2	piece	LC Connector Assy, 1.6mm-2.0mm, MM	4
2	piece	LC Connector Assy, MM	3
2	piece	LC Duplex clip, black	2
4	piece	LC, SC, FC Straight Boot, Beige	1

THIS INFORMATION IS CONTROLLED. ANY INFORMATION TO BE RELEASED TO THE PUBLIC MUST BE APPROVED BY THE AUTHORITY. THIS INFORMATION IS CONTROLLED. ANY INFORMATION TO BE RELEASED TO THE PUBLIC MUST BE APPROVED BY THE AUTHORITY. THIS INFORMATION IS CONTROLLED. ANY INFORMATION TO BE RELEASED TO THE PUBLIC MUST BE APPROVED BY THE AUTHORITY.

LOC  
CE  
M  
DIST  
16

REV	DESCRIPTION	DATE	BY	APP'D
A	Rev Per ECN RELEASE	3/26/2007		JD
P	LR			

**RESTRICTED TO:**  
v

**Dimensions:**  
meters

**IS ANY DIMENSION OTHERWISE SPECIFIED?**

0 PLC  
1 PLC  
2 PLC  
3 PLC  
4 D.C.

**DRN:** Cable Assy Configurator

**MATERIAL:** -

**HEAT TREAT:** -

**OK:** Jeremy Duncan

**AMP Tyco Electronics, Inc.**  
Harrisburg, PA 17105-3608

**APP'D:** Jeremy Duncan

**TITLE:** FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex

**SCALE:** NTS

**SIZE:** A2

**DRAWING NO.:** C-1906055

**SHEET:** 2 of 4

**REV:** A

8 7 6 5 4 3 2 1

USE ON


Part #	L (meters)	L (feet)	LC-Duplex Secure, Orange		LC-Duplex, Beige	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
4-1906055-3	42.570 - 43.430	139.66 - 142.48	0.56	-	0.56	-
4-1906055-4	43.560 - 44.440	142.91 - 145.80	0.57	-	0.57	-
4-1906055-5	44.550 - 45.450	146.16 - 149.11	0.57	-	0.57	-
4-1906055-6	45.540 - 46.460	149.40 - 152.42	0.57	-	0.57	-
4-1906055-7	46.530 - 47.470	152.65 - 155.74	0.57	-	0.57	-
4-1906055-8	47.520 - 48.490	155.90 - 159.05	0.57	-	0.57	-
4-1906055-9	48.510 - 49.490	159.15 - 162.36	0.57	-	0.57	-
5-1906055-0	49.500 - 50.500	162.40 - 165.68	0.58	-	0.58	-
5-1906055-1	50.490 - 51.510	165.64 - 168.99	0.58	-	0.58	-
5-1906055-2	51.480 - 52.520	168.89 - 172.30	0.58	-	0.58	-
5-1906055-3	52.470 - 53.530	172.14 - 175.62	0.58	-	0.58	-
5-1906055-4	53.460 - 54.540	175.39 - 178.93	0.58	-	0.58	-
5-1906055-5	54.450 - 55.550	178.64 - 182.25	0.58	-	0.58	-
5-1906055-6	55.440 - 56.560	181.88 - 185.56	0.58	-	0.58	-
5-1906055-7	56.430 - 57.570	185.13 - 188.87	0.59	-	0.59	-
5-1906055-8	57.420 - 58.580	188.38 - 192.19	0.59	-	0.59	-
5-1906055-9	58.410 - 59.590	191.63 - 195.50	0.59	-	0.59	-
6-1906055-0	59.400 - 60.600	194.88 - 198.81	0.59	-	0.59	-
6-1906055-1	60.390 - 61.610	198.12 - 202.13	0.59	-	0.59	-
6-1906055-2	61.380 - 62.620	201.37 - 205.44	0.59	-	0.59	-
6-1906055-3	62.370 - 63.630	204.62 - 208.75	0.59	-	0.59	-
6-1906055-4	63.360 - 64.640	207.87 - 212.07	0.6	-	0.6	-
6-1906055-5	64.350 - 65.650	211.12 - 215.38	0.6	-	0.6	-
6-1906055-6	65.340 - 66.660	214.37 - 218.70	0.6	-	0.6	-
6-1906055-7	66.330 - 67.670	217.61 - 222.01	0.6	-	0.6	-
6-1906055-8	67.320 - 68.680	220.86 - 225.32	0.6	-	0.6	-
6-1906055-9	68.310 - 69.690	224.11 - 228.64	0.6	-	0.6	-
7-1906055-0	69.300 - 70.700	227.36 - 231.95	0.61	-	0.61	-
7-1906055-1	70.290 - 71.710	230.61 - 235.26	0.61	-	0.61	-
7-1906055-2	71.280 - 72.720	233.85 - 238.58	0.61	-	0.61	-
7-1906055-3	72.270 - 73.730	237.10 - 241.89	0.61	-	0.61	-
7-1906055-4	73.260 - 74.740	240.35 - 245.20	0.61	-	0.61	-
7-1906055-5	74.250 - 75.750	243.60 - 248.52	0.61	-	0.61	-
7-1906055-6	75.240 - 76.760	246.85 - 251.83	0.61	-	0.61	-
7-1906055-7	76.230 - 77.770	250.09 - 255.15	0.62	-	0.62	-
7-1906055-8	77.220 - 78.780	253.34 - 258.46	0.62	-	0.62	-
7-1906055-9	78.210 - 79.790	256.59 - 261.77	0.62	-	0.62	-
8-1906055-0	79.200 - 80.800	259.84 - 265.09	0.62	-	0.62	-


THIS DRAWING IS A CONTROLLED DOCUMENT

THIS INFORMATION IS CONTROLLED AND IS NOT TO BE RELEASED TO THE PUBLIC OR TO ANY OTHER PARTY WITHOUT THE WRITTEN PERMISSION OF AMP TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC  
CE  
DIST  
16

A	Rev Per ECR	RELEASE	0/26/2007	-	JD
P	LR	REVISION RECORD	DATE	BY	APP

DIMENSIONS  
 meters  

 IS UNLESS OTHERWISE SPECIFIED  
 0 PLC  
 1 PLC  
 2 PLC  
 3 PLC  
 4 D.C.

DIM Cable Assy Configurator OK Jeremy Duncan APID Jeremy Duncan NAME FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex	MATERIAL - HEAT TREAT -  Tyco Electronics, Inc. Harrisburg, PA 17105-3608
SCALE NTS SIZE A2 DRAWING NO. <b>C-1906055</b>	SHEET 3 of 4 REV <b>A</b>

Restricted To:  
v.

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

CAC Customer Layout Rev: D

THIS DRAWING IS A CONTROLLED DOCUMENT

USE ON

**Label 1** Per specification 107-1645-1

Trace # - Bar Code  
 Trace # - Human Readable  
 Part Number  
 Country of Origin

This label is used on all lengths on this drawing.

**Label 2** Per specification 107-1645-1

Trace # - Bar Code  
 Trace # - Human Readable  
 Part Number  
 Country of Origin

This label is used on all lengths on this drawing.

THIS INFORMATION IS CONTROLLED AND IS NOT TO BE RELEASED TO THE PUBLIC OR TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF AMP. THIS INFORMATION IS CONTROLLED DOCUMENT. AMP, AMP ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC  
 CE  
 DIST  
 16

P	LINE	REVISION RECORD	DATE	BY	APP
A		Rev Per ECR RELEASE	0/26/2007	-	JD

RESTRICTIONS  
 DIMENSIONS  
 meters

RESTRICTIONS  
 DIMENSIONS  
 OTHERWISE SPECIFIED

0 PLC  
 1 PLC  
 2 PLC  
 3 PLC  
 4 DEC

Restricted To:  
 v

DRN	Cable Assy Configurator	MATERIAL	HEAT TREAT
OK	Jeremy Duncan		
APPD	Jeremy Duncan	<b>AMP</b> Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex		
SCALE	SIZE	DRAWING NO.	SHEET
NTS	A2	C-1906055	4 of 4
			REV
			A

CAC Customer Layout Rev. D

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

A  
B  
C  
D