


PT78NR100 Series

**1 AMP PLUS TO MINUS VOLTAGE
 INTEGRATED SWITCHING REGULATOR**


Revised 5/15/98

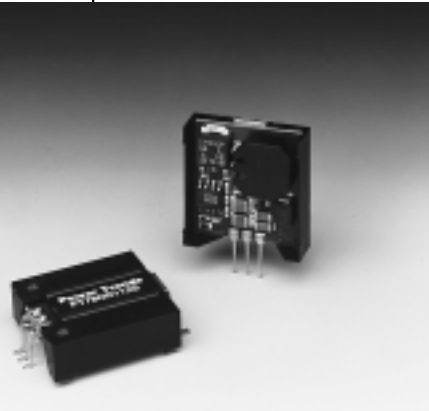

- Negative output from positive input
- Wide Input Range
- Self-Contained Inductor
- Short Circuit Protection
- Over-Temperature Protection
- Fast Transient Response


The PT78NR100 Series creates a negative output voltage from a positive input voltage greater than 7V. These easy-to-use, 3-terminal, Integrated Switching Regulators (ISRs) have a maximum output power of 5 watts and a negative output voltage that is laser trimmed. They also have excellent line and load regulation.

Standard Application

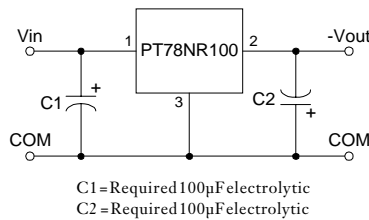

Pin-Out Information

Pin	Function
1	+V _{in}
2	-V _{out}
3	GND



SUGGESTED BOARD LAYOUT
 COMPONENT SIDE VIEW
 Pkg Style 500

Ordering Information

PT78NR1 **XX** **Y**

Output Voltage

- 03** = - 3.0 Volts
- 05** = - 5.0 Volts
- 52** = - 5.2 Volts
- 07** = - 7.0 Volts
- 08** = - 8.0 Volts
- 09** = - 9.0 Volts
- 12** = - 12.0 Volts
- 15** = - 15.0 Volts

Package Suffix

- V** = Vertical Mount
- S** = Surface Mount
- H** = Horizontal Mount

Specifications

Characteristics (T _a = 25°C unless noted)	Symbols	Conditions	PT78NR100 SERIES			Units
			Min	Typ	Max	
Output Current	I _o	Over V _{in} range V _o = -5V V _o = -7, -8, -9V V _o = -12V V _o = -15V	0.05*	—	1.00	A
Short Circuit Current	I _{sc}	V _{in} = 10V	—	4 × I _{max}	—	A pk
Inrush Current	I _{ir} t _{ir}	V _{in} = 10V On start-up	—	4 0.5	—	A mSec
Input Voltage Range	V _{in}	0.1 ≤ I _o ≤ I _{max} V _o = -5V V _o = -7, -8, -9V V _o = -12V V _o = -15V	7 7 7 7	— — — —	25 21 18 15	V V V V
Output Voltage Tolerance	ΔV _o	Over V _{in} range T _a = -20°C to +70°C	—	±1.0	±3.0	% V _o
Line Regulation	Reg _{line}	Over V _{in} range	—	±0.5	±1.0	% V _o
Load Regulation	Reg _{load}	0.1 ≤ I _o ≤ I _{max}	—	±0.5	±1.0	% V _o
V _o Ripple/Noise	V _n	V _{in} = 10V, I _o = I _{max}	—	±2	—	% V _o
Transient Response (with 100µF output cap)	t _{tr}	50% load change V _o over/undershoot	— —	100 5.0	250 —	µSec % V _o
Efficiency	η	V _{in} = 10V, I _o = 0.5 × I _{max} , V _o = -5V	—	75	—	%
Switching Frequency	f _o	Over V _{in} and I _o ranges	600	650	700	kHz
Absolute Maximum Operating Temperature Range	T _a	Free Air Convection, (40-60LFM) Over V _{in} and I _o Ranges	-40	—	+85	°C
Recommended Operating Temperature Range	T _a	Free Air Convection, (40-60LFM) Over V _{in} and I _o Ranges	-40	—	+60**	°C
Thermal Resistance	θ _{ja}	Free Air Convection, (40-60LFM)	—	45	—	°C/W
Storage Temperature	T _s	—	-40	—	+125	°C
Mechanical Shock	—	Per Mil-STD-883D, Method 2002.3	—	500	—	G's
Mechanical Vibration	—	Per Mil-STD-883D, Method 2007.2, 20-2000Hz, soldered in a PC board	—	5	—	G's
Weight	—	—	—	6.5	—	Grams

*ISR will operate down to no load with reduced specifications.

**See Thermal Derating chart.

Note: The PT78NR100 Series requires a 100µF electrolytic or tantalum output capacitor for proper operation in all applications.


PT78NR100 Series

CHARACTERISTIC DATA


Wide Input Range Products
DATA SHEETS

PT78NR105 -5.0 VDC (See Note 1)


Efficiency vs Output Current

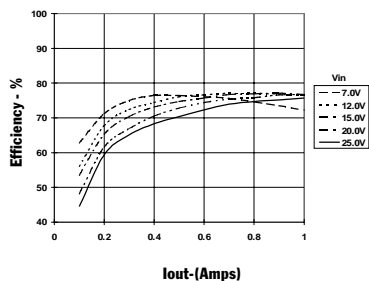


Ripple vs Output Current

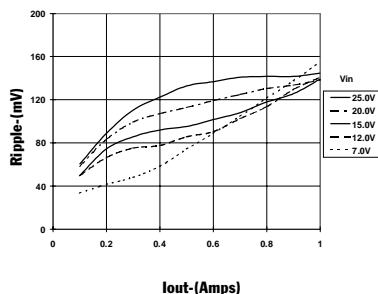

Thermal Derating (Ta) (See Note 2)

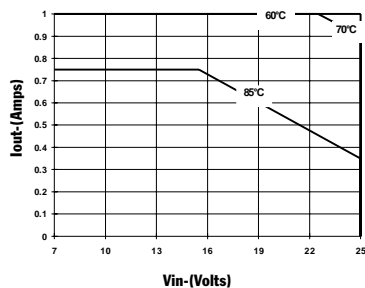


Power Dissipation vs Output Current

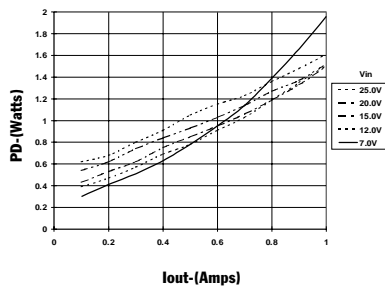


PT78NR109 -9.0 VDC (See Note 1)


Efficiency vs Output Current

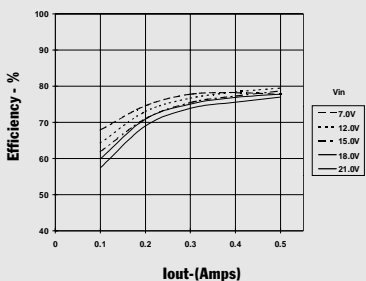


Ripple vs Output Current

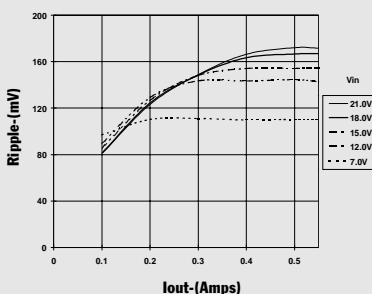

Thermal Derating (Ta) (See Note 2)

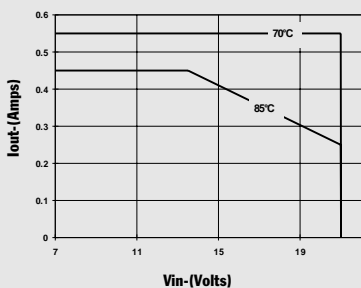


Power Dissipation vs Output Current

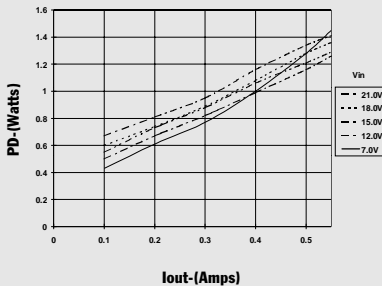


PT78NR112 -12.0 VDC (See Note 1)


Efficiency vs Output Current

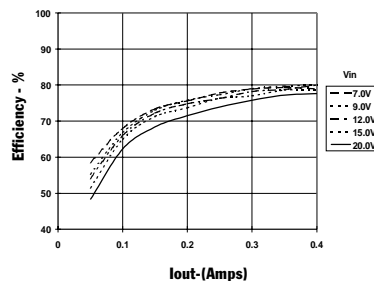


Ripple vs Output Current

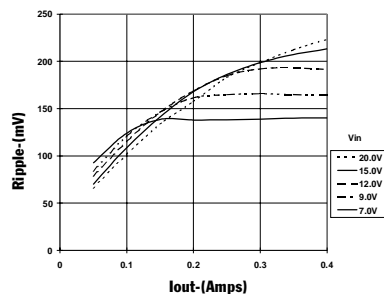

Thermal Derating (Ta) (See Note 2)

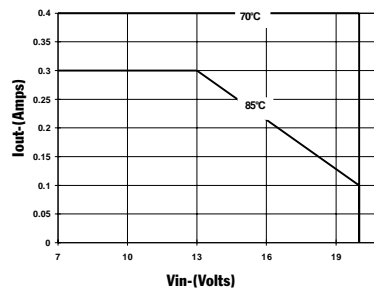

Power Dissipation vs Output Current

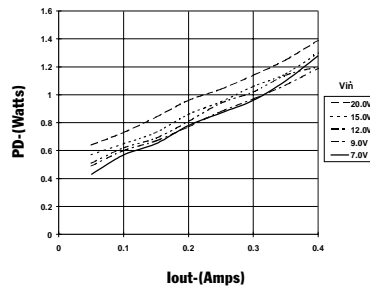

Note 1: All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.
Note 2: Thermal derating graphs are developed in free air convection cooling of 40-60 LFM. (See Thermal Application Notes.)

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 1999, Texas Instruments Incorporated