



Restricted to: General Release

USE ON

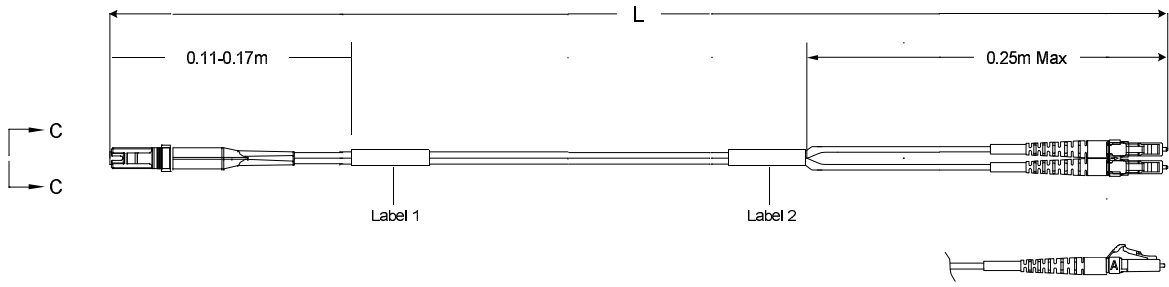

Left Side
 Connector(s): MT-RJ (No Pins)
 Mode: MM
 Housing Color: Black
 Geom. Spec: 115-1215



Fiber Path
 Fiber A - ——— - B
 Fiber B - ——— - A

Right Side
 Connector(s): LC-Duplex Secure
 Mode: MM
 Housing Color: Blue
 Geom. Spec: N/A

- Notes:
- 1 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
 - 2 Includes dust caps (not shown on print).
 - 3 IL tested at 1300nm.
 - 4 Label 2 will not be present on any cable assembly less than 5 meters long.

THIS DRAWING IS CONTROLLED DOCUMENT (CLD) 17/06/1
 THIS INFORMATION IS CONTROLLED AND IS SUBJECT TO EXPORT CONTROLS. IT IS NOT TO BE RELEASED, REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION, LUDLOW, PENNSYLVANIA.

LOC
 CE/11
 DIST
 16

REV	DATE	BY	APP'D
A	2/15/2005		DF
P			

Customer Print

DIMENSIONS: meters
 TO DIMENSIONS UNLESS OTHERWISE SPECIFIED:
 0.125 PLG ± .010
 0.150 PLG ± .010
 0.180 PLG ± .010
 0.250 PLG ± .010
 0.315 PLG ± .010

DR	Cable Assy Configurator	MATERIAL		HEAT TREAT	
DR	Dave Fennel	AMP Tyco Electronics, Inc. Harrisburg PA 17105-3808			
APP'D	Dave Fennel				
NAME	FO/GA - 2 fiber, 62.5/1.25, OFNR (Riser) jacket, MT-RJ (No Pins) to LC-Duplex Secure				
SCALE	NTS	SIZE	A2	DRAWING NO	C-1907125
				SHEET	1 of 4
				REV	A

CAC Customer Layout Rev: D

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

Restricted to: General Release

USE ON

THIS DRAWING IS A CONTROLLED DOCUMENT

Part #	L (meters)	L (feet)	MT-RJ (No Pins), Black		LC-Duplex Secure, Blue	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1907125-1	0.950 - 1.050	3.11 - 3.44	0.5	20	0.5	-
0-1907125-2	1.950 - 2.050	6.39 - 6.72	0.5	20	0.5	-
0-1907125-3	2.950 - 3.050	9.67 - 10.00	0.5	20	0.5	-
0-1907125-4	3.920 - 4.080	12.86 - 13.38	0.51	20	0.51	-
0-1907125-5	4.920 - 5.080	16.14 - 16.66	0.51	20	0.51	-
0-1907125-6	5.920 - 6.080	19.42 - 19.94	0.51	20	0.51	-
0-1907125-7	6.920 - 7.080	22.70 - 23.22	0.51	20	0.51	-
0-1907125-8	7.920 - 8.080	25.98 - 26.50	0.51	20	0.51	-
0-1907125-9	8.850 - 9.150	29.03 - 30.01	0.51	20	0.51	-
1-1907125-0	9.850 - 10.150	32.31 - 33.30	0.52	20	0.52	-
1-1907125-1	10.850 - 11.150	35.59 - 36.58	0.52	20	0.52	-
1-1907125-2	11.850 - 12.150	38.87 - 39.86	0.52	20	0.52	-
1-1907125-3	12.850 - 13.150	42.15 - 43.14	0.52	20	0.52	-
1-1907125-4	13.850 - 14.150	45.43 - 46.42	0.52	20	0.52	-
1-1907125-5	14.850 - 15.150	48.72 - 49.70	0.52	20	0.52	-
1-1907125-6	15.840 - 16.160	51.96 - 53.01	0.52	20	0.52	-
1-1907125-7	16.830 - 17.170	55.21 - 56.33	0.53	20	0.53	-
1-1907125-8	17.820 - 18.180	58.46 - 59.64	0.53	20	0.53	-
1-1907125-9	18.810 - 19.190	61.71 - 62.95	0.53	20	0.53	-
2-1907125-0	19.800 - 20.200	64.96 - 66.27	0.53	20	0.53	-
2-1907125-1	20.790 - 21.210	68.20 - 69.58	0.53	20	0.53	-
2-1907125-2	21.780 - 22.220	71.45 - 72.90	0.53	20	0.53	-
2-1907125-3	22.770 - 23.230	74.70 - 76.21	0.53	20	0.53	-
2-1907125-4	23.760 - 24.240	77.95 - 79.52	0.54	20	0.54	-
2-1907125-5	24.750 - 25.250	81.20 - 82.84	0.54	20	0.54	-
2-1907125-6	25.740 - 26.260	84.44 - 86.15	0.54	20	0.54	-
2-1907125-7	26.730 - 27.270	87.69 - 89.46	0.54	20	0.54	-
2-1907125-8	27.720 - 28.280	90.94 - 92.78	0.54	20	0.54	-
2-1907125-9	28.710 - 29.290	94.19 - 96.09	0.54	20	0.54	-
3-1907125-0	29.700 - 30.300	97.44 - 99.40	0.55	20	0.55	-
3-1907125-1	30.690 - 31.310	100.68 - 102.72	0.55	20	0.55	-
3-1907125-2	31.680 - 32.320	103.93 - 106.03	0.55	20	0.55	-
3-1907125-3	32.670 - 33.330	107.18 - 109.35	0.55	20	0.55	-
3-1907125-4	33.660 - 34.340	110.43 - 112.66	0.55	20	0.55	-
3-1907125-5	34.650 - 35.350	113.68 - 115.97	0.55	20	0.55	-
3-1907125-6	35.640 - 36.360	116.92 - 119.29	0.55	20	0.55	-
3-1907125-7	36.630 - 37.370	120.17 - 122.60	0.56	20	0.56	-
3-1907125-8	37.620 - 38.380	123.42 - 125.91	0.56	20	0.56	-
3-1907125-9	38.610 - 39.390	126.67 - 129.23	0.56	20	0.56	-
4-1907125-0	39.600 - 40.400	129.92 - 132.54	0.56	20	0.56	-
4-1907125-1	40.590 - 41.410	133.16 - 135.85	0.56	20	0.56	-
4-1907125-2	41.580 - 42.420	136.41 - 139.17	0.56	20	0.56	-

Qty	U of M	Description	Item No.
1	piece	LC Duplex clip, black	14
1	piece	MT-RJ, SPRING PUSH, UNIVERSAL	13
1	piece	PIN KEEPER, 3.8MM	12
AR	meter	2 fiber, 62.5/125, 1.8 mm, TwinZip, Orange, OFNR (Riser)	11
2	piece	Trace Label	10
1	piece	GRIMP EYELET, MT-RJ	9
1	piece	HOUSING, CONN, MT-RJ, BLACK	8
1	piece	SPRING, MT-RJ, 3.8 DESIGN	7
2	piece	LC, SC, FC Straight Boot, Beige	6
2	piece	Eyelet/Shrink tube assembly - White	5
1	piece	DUST COVER, MT-RJ	4
1	piece	MT-RJ FERRULE, THERMOPLAST MM	3
1	piece	MT-RJ TwinZip Band Limiting Boot, Beige	2
2	piece	LC Connector Assy, 1.6mm-2.0mm, MM	1

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO AMP ELECTRONICS, INC. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. AMP ELECTRONICS CORPORATION, LANSHIRE, PENNSYLVANIA

LOC
CENT
DIST
16

Rev	Pir	ECR	RELEASE	2/15/2005	-	DF
1	LIR		REVISION REQUIRED	DATE	BY	APP'D

Customer Print

AMP logo

Customer Print

DR	Cable Assy Configurator	MATERIAL	-	HEAT TREAT	-
DR	Dave Fennel	AMP Tyco Electronics, Inc. Harrisburg PA 17105-3808			
APP'D	Dave Fennel				
NAME FO GA - 2 fiber, 62.5/125, OFNR (Riser) jacket, MT-RJ (No Pins) to LC-Duplex Secure					
SCALE	SIZE	DRAWING NO	SHEET	REV	
NTS	A2	C-1907125	2 of 4	A	

Restricted to: General Release

USE ON

Part #	L (meters)	L (feet)	MT-RJ (No Pins), Black		LC-Duplex Secure, Blue	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
4-1907125-3	42.570 - 43.430	139.66 - 142.48	0.56	20	0.56	-
4-1907125-4	43.560 - 44.440	142.91 - 145.80	0.57	20	0.57	-
4-1907125-5	44.550 - 45.450	146.16 - 149.11	0.57	20	0.57	-
4-1907125-6	45.540 - 46.460	149.40 - 152.42	0.57	20	0.57	-
4-1907125-7	46.530 - 47.470	152.65 - 155.74	0.57	20	0.57	-
4-1907125-8	47.520 - 48.480	155.90 - 159.05	0.57	20	0.57	-
4-1907125-9	48.510 - 49.490	159.15 - 162.36	0.57	20	0.57	-
5-1907125-0	49.500 - 50.500	162.40 - 165.68	0.58	20	0.58	-
5-1907125-1	50.490 - 51.510	165.64 - 168.99	0.58	20	0.58	-
5-1907125-2	51.480 - 52.520	168.89 - 172.30	0.58	20	0.58	-
5-1907125-3	52.470 - 53.530	172.14 - 175.62	0.58	20	0.58	-
5-1907125-4	53.460 - 54.540	175.39 - 178.93	0.58	20	0.58	-
5-1907125-5	54.450 - 55.550	178.64 - 182.25	0.58	20	0.58	-
5-1907125-6	55.440 - 56.560	181.88 - 185.56	0.58	20	0.58	-
5-1907125-7	56.430 - 57.570	185.13 - 188.87	0.59	20	0.59	-
5-1907125-8	57.420 - 58.580	188.38 - 192.19	0.59	20	0.59	-
5-1907125-9	58.410 - 59.590	191.63 - 195.50	0.59	20	0.59	-
6-1907125-0	59.400 - 60.600	194.88 - 198.81	0.59	20	0.59	-
6-1907125-1	60.390 - 61.610	198.12 - 202.13	0.59	20	0.59	-
6-1907125-2	61.380 - 62.620	201.37 - 205.44	0.59	20	0.59	-
6-1907125-3	62.370 - 63.630	204.62 - 208.75	0.59	20	0.59	-
6-1907125-4	63.360 - 64.640	207.87 - 212.07	0.6	20	0.6	-
6-1907125-5	64.350 - 65.650	211.12 - 215.38	0.6	20	0.6	-
6-1907125-6	65.340 - 66.660	214.37 - 218.70	0.6	20	0.6	-
6-1907125-7	66.330 - 67.670	217.61 - 222.01	0.6	20	0.6	-
6-1907125-8	67.320 - 68.680	220.86 - 225.32	0.6	20	0.6	-
6-1907125-9	68.310 - 69.690	224.11 - 228.64	0.6	20	0.6	-
7-1907125-0	69.300 - 70.700	227.36 - 231.95	0.61	20	0.61	-
7-1907125-1	70.290 - 71.710	230.61 - 235.26	0.61	20	0.61	-
7-1907125-2	71.280 - 72.720	233.85 - 238.58	0.61	20	0.61	-
7-1907125-3	72.270 - 73.730	237.10 - 241.89	0.61	20	0.61	-
7-1907125-4	73.260 - 74.740	240.35 - 245.20	0.61	20	0.61	-
7-1907125-5	74.250 - 75.750	243.60 - 248.52	0.61	20	0.61	-
7-1907125-6	75.240 - 76.760	246.85 - 251.83	0.61	20	0.61	-
7-1907125-7	76.230 - 77.770	250.09 - 255.15	0.62	20	0.62	-
7-1907125-8	77.220 - 78.780	253.34 - 258.46	0.62	20	0.62	-
7-1907125-9	78.210 - 79.790	256.59 - 261.77	0.62	20	0.62	-
8-1907125-0	79.200 - 80.800	259.84 - 265.09	0.62	20	0.62	-

THIS DRAWING IS A CONTROLLED DOCUMENT

THIS INFORMATION IS CONFIDENTIAL AND IS NOT TO BE RELEASED TO THE PUBLIC OR TO ANY OTHER PARTY WITHOUT THE WRITTEN PERMISSION OF AMP ELECTRONICS CORPORATION. ANY UNAUTHORIZED DISCLOSURE OF THIS INFORMATION TO ANY OTHER PARTY IS STRICTLY PROHIBITED. AMP ELECTRONICS CORPORATION, LANSHIRE, PENNSYLVANIA

LOC
CENT
DIST
16

DIMENSIONS meters		TO DIMENSIONS UNLESS OTHERWISE SPECIFIED	
0	PLC	-	-
1	PLC	-	-
2	PLC	-	-
3	PLC	-	-
4	PLC	-	-

DR	Cable Assy Configurator	MATERIAL	-	HEAT TREAT	-
DR	Dave Fennel	AMP Tyco Electronics, Inc. Harrisburg PA 17105-3808			
APPD	Dave Fennel				
NAME	FO GA - 2 fiber, 62.5/125, OFNR (Riser) jacket, MT-RJ (No Pins) to LC-Duplex Secure				
SCALE	NTS	SIZE	A2	DRAWING NO	C-1907125
SHEET	3 of 4		REV	A	

Customer Print

8 7 6 5 4 3 2 1

D
C
B
A

Restricted to: General Release

Label 1

Per specification 107-1645-1



- Trace # - Bar Code
- Trace # - Human Readable
- Part Number
- Country of Origin

This label is used on all lengths on this drawing.

USE ON

Label 2

Per specification 107-1645-1



- Trace # - Bar Code
- Trace # - Human Readable
- Part Number
- Country of Origin

This label is used on all lengths on this drawing.

THIS DRAWING IS A CONTROLLED DOCUMENT

THIS DRAWING IS A CONTROLLED DOCUMENT

LOC
CENT
DIST
16

A	Rev	Per	ECR	RELEASE	2/15/2005	-	DF
P	LIR			REVISION REQUIRED	DATE	BY	APP

Customer Print

DIMENSIONS
 meters
 DIMENSIONS UNITS
 OR UNITS SPECIFIED

0 PLG
 1 PLG
 2 PLG
 3 PLG
 4 PLG
 5 PLG
 6 PLG
 7 PLG
 8 PLG
 9 PLG
 0 PLG
 1 PLG
 2 PLG
 3 PLG
 4 PLG
 5 PLG
 6 PLG
 7 PLG
 8 PLG
 9 PLG

DR	Cable Assy Configurator	MATERIAL	-	HEAT TREAT	-
DR	Dave Fennel	AMP Tyco Electronics, Inc. Harrisburg PA 17105-3808			
APP	Dave Fennel				
NAME	FO GA - 2 fiber, 62.5/1.25, OFNR (Riser) jacket, MT-RJ (No Pins) to LC-Duplex Secure				
SCALE	NTS	SIZE	A2	DRAWING NO	C-1907125
				SHEET	4 of 4
				REV	A

8 7 6 5 4 3 2 1

CAC Customer Layout Rev: D