#### **Technical Data Sheet**

### 1206 Package Chip LEDs with Inner Lens

#### 11-21UYC/S530-XX/TR8

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version.

#### **Descriptions**

- The 11-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

#### **Device Selection Guide**

Part No.	(	T (C)	
	Material	<b>Emitted Color</b>	Lens Color
11-21UYC/S530-XX/TR8	AlGaInP	Brilliant Yellow	Water Clear



Everlight Electronics Co., Ltd. Device No:SZDSE-111-007

http://www.everlight.com

Prepared date: 17-Aug-2005


Rev.1 Page: 1 of 9





# EVERLIGHT EVERLIGHT ELECTRONICS CO.,LTD.

### 11-21UYC/S530-XX/TR8


### **Package Outline Dimensions**








For reflow soldering (propose)





**Notes:** Tolerances Unless Dimension  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:SZDSE-111-007

http://www.everlight.com Prepared date: 17-Aug-2005 Rev.1

Page: 2 of 9



#### **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	<b>I</b> F	25	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40~ +90	$^{\circ}\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!\!$	
Electrostatic Discharge(HBM)	ESD	2000	V	
Power Dissipation	Pd	60	mW	
Peak Forward Current (Duty 1/10 @1KHz)	<b>I</b> F	60	mA	
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.		

### **Electro-Optical Characteristics (Ta=25°C)**

	Diedro option characteristics (1 20)						
Parameter	Symbol	*Chip Rank	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity		A2	29	73			
		A3	68	106			
	Iv	A4	97	145		mcd	
		A5	116	184			
		A6	145	213			IF=20mA
Viewing Angle	2 \theta 1/2			60		deg	
Peak Wavelength	λр			591		nm	
Dominant Wavelength	λd			589		nm	
Spectrum Radiation Bandwidth	Δλ			15		nm	
Forward Voltage	VF		1.7	2.0	2.4	V	
Reverse Current	IR				10	$\mu$ A	VR=5V

## \*11-21UYC/S530-<u>XX/</u>TR8



Chip Rank

Everlight Electronics Co., Ltd.

Device No:SZDSE-111-007


http://www.everlight.com


Prepared date: 17-Aug-2005


Rev.1


Page: 3 of 9


### **Typical Electro-Optical Characteristics Curves**














Everlight Electronics Co., Ltd.

Device No:SZDSE-111-007

http://www.everlight.com

Prepared date: 17-Aug-2005

Rev.1

Page: 4 of 9

#### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

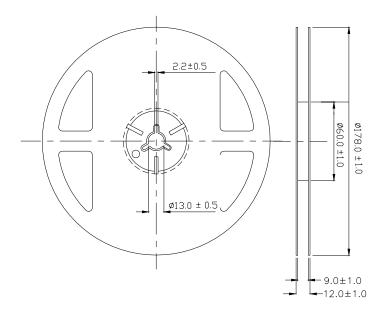

**Note:** The tolerances unless mentioned are  $\pm 0.1$ , Unit = mm.

Everlight Electronics Co., Ltd.

Device No:SZDSE-111-007


http://www.everlight.com

Prepared date: 17-Aug-2005

Rev.1


Page: 5 of 9

### Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

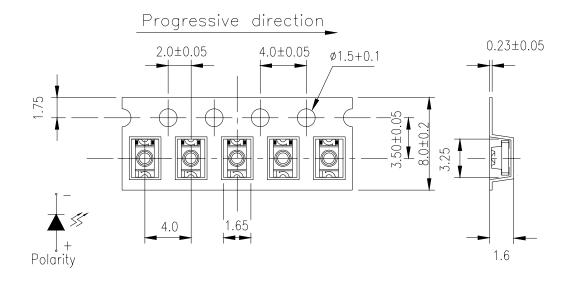

**Note:** The tolerances unless mentioned are  $\pm 0.1$ , Unit = mm.

#### **Moisture Resistant Packaging**

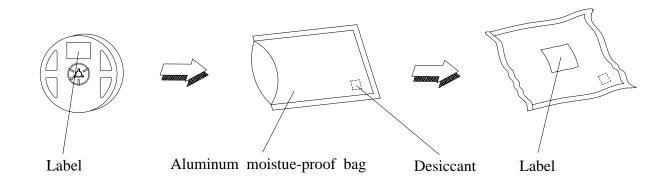

Everlight Electronics Co., Ltd.

Device No:SZDSE-111-007

http://www.everlight.com

Prepared date: 17-Aug-2005

Rev.1

Page: 6 of 9

#### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Rc
1	Reflow	Temp. : $260^{\circ}$ C $\pm 5^{\circ}$ C Min. 5 sec.	6 min.	22 Pcs.	0/1
2	Temperature Cycle	H:+85°C 30min. ∫ 5 min. L:-55°C 30min.	50 Cycles	22 Pcs.	0/1
3	Thermal Shock	H:+100°C 5min. ∫ 10 sec. L:-10°C 5min.	50 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp.: -55°C	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C/85% R.H	1000 Hrs.	22 Pcs.	0/1

Everlight Electronics Co., Ltd. Device No:SZDSE-111-007

http://www.everlight.com

Rev.1

Page: 7 of 9

Prepared date: 17-Aug-2005


#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

  Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile



- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. Device No:SZDSE-111-007

http://www.everlight.com

Prepared date: 17-Aug-2005

Rev.1 Page: 8 of 9




#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

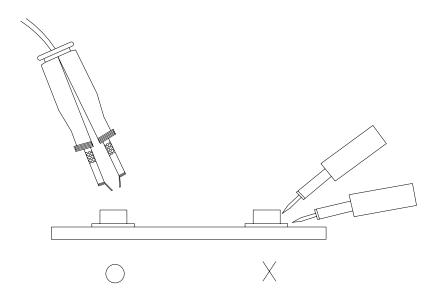

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936 Fax: 886-2267-6244, 2267-6189, 2267-6306 http://www.everlight.com

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev.1 Page: 9 of 9

1 agc. 7 01 7

Device No:SZDSE-111-007

Prepared date: 17-Aug-2005