

Technical Data Sheet

Chip LED with Right Angle Lens

Features

LIGHTING

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions

- The 12-21C SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Part No.	Chip Material	Emitted Color	Resin color
12-21C/T3D-CP1Q2B12Y/2C	InGaN	Pure White	Yellow Diffused





12-21C/T3D-CP1Q2B12Y/2C



12-21C/T3D-CP1Q2B12Y/2C

Package Outline Dimensions

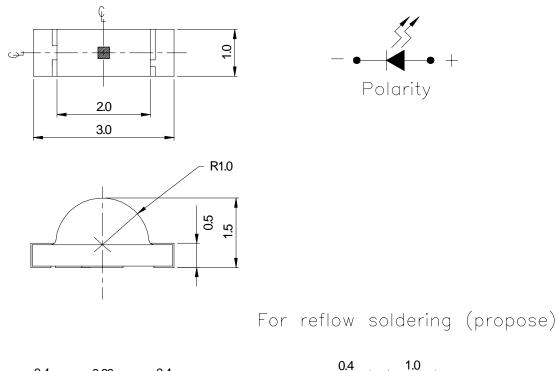

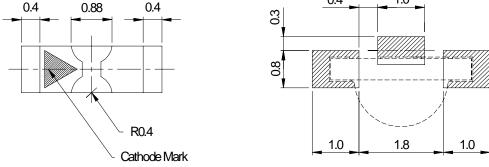

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm.

Everlight Electronics Co., Ltd. Device No. : DSE-0001684



12-21C/T3D-CP1Q2B12Y/2C

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V _R	5	V
Forward Current	$\mathrm{I_{F}}$	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	$I_{\rm FP}$	100	mA
Power Dissipation	Pd	110	mW
Electrostatic Discharge(HBM)	ESD	150	V
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +90	°C
Soldering Temperature	Tsol	Reflow Soldering : $260 \degree C$ for 10 sec. Hand Soldering : $350 \degree C$ for 3 sec.	

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	I_V	45.0		112	mcd	
Viewing Angle	2 0 1/2		110		deg	I _F =5mA
Forward Voltage	V_{F}	2.70		3.40	V	
Reverse Current	I _R			50	μA	V _R =5V

Notes:

- 1. Tolerance of Luminous Intensity ±11%
- 2. 2.Tolerance of Forward Voltage ±0.05V

12-21C/T3D-CP1Q2B12Y/2C

Bin Range Of Luminous Intensity

EVERLIGHT

FOREVER

LIGHTING

Bin	Min	Max	Unit	Condition
P1	45.0	57.0	mcd	I _F =5mA
P2	57.0	72.0		
Q1	72.0	90.0		
Q2	90.0	112		

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition	
B12	34	2.70	2.80	V	I _F =5mA	
	35	2.80	2.90			
	36	2.90	3.00			
	37	3.00	3.10			
	38	3.10	3.20			
	39	3.20	3.30			
	40	3.30	3.40			

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Forward Voltage $\pm 0.05V$

12-21C/T3D-CP1Q2B12Y/2C

Chromaticity Coordinates Specifications for Bin Grading

Group	Bin Code	CIE_x	CIE_y	Condition
	1	0.274	0.226	
		0.274	0.258	
	1	0.294	0.286	
		0.294	0.254	
		0.274	0.258	
	2	0.274	0.291	
		0.294	0.319	
C		0.294	0.286	– I _F =5mA
C	3	0.294	0.254	IF-JIIIA
		0.294	0.286	
		0.314	0.315	
		0.314	0.282	
		0.294	0.286	
	4 -	0.294	0.319	
		0.314	0.347	
		0.314	0.315	

Notes:

EVERLIGHT

FOREVER

LIGHTING


1.The C.I.E. 1931 chromaticity diagram (Tolerance ±0.01).

2. The products are sensitive to static electricity and care must be fully taken when handling products.



12-21C/T3D-CP1Q2B12Y/2C


CIE Chromaticity Diagram

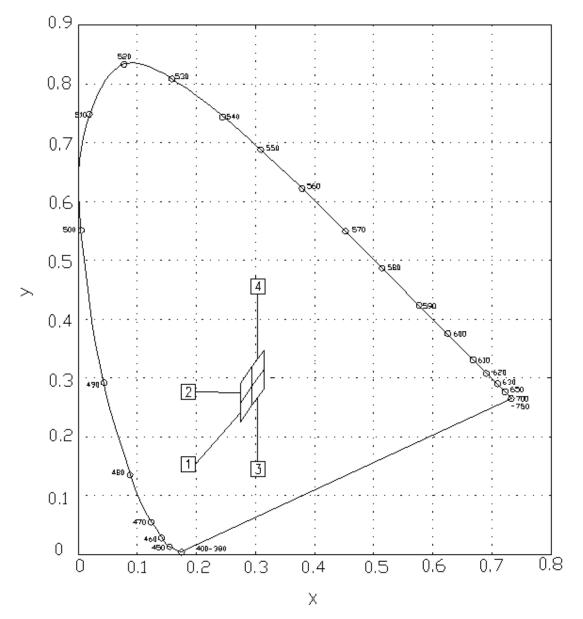




12-21C/T3D-CP1Q2B12Y/2C

Typical Electro-Optical Characteristics Curves

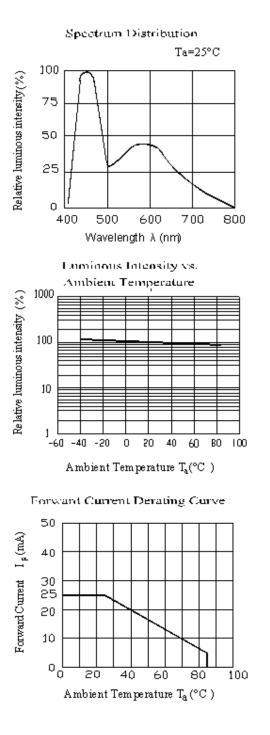

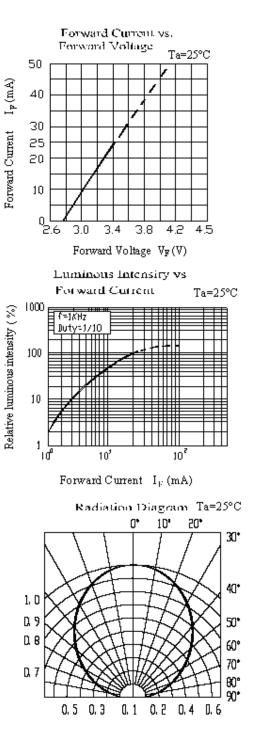

Everlight Electronics Co., Ltd. Device No. : DSE-0001684 http://www.everlight.com Prepared date: 8-May-2009 Rev. 2 Page: 7 of 12 Prepared by: YangJunyu

<u>12-21C/T3D-CP1Q2B12Y/2C</u>

Label explanation

EVERLIGHT

LIGHTING

CAT: Luminous Intensity Rank


FOREVER

HUE: Chromaticity Coordinates

REF: Forward Voltage Rank



Reel Dimensions

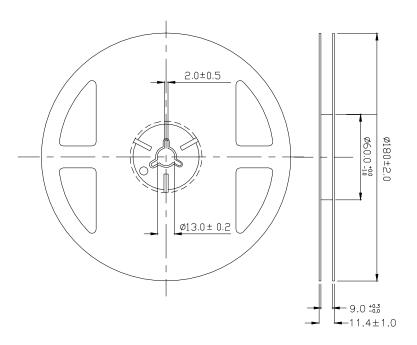


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm.

Everlight Electronics Co., Ltd. Device No. : DSE-0001684




12-21C/T3D-CP1Q2B12Y/2C

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

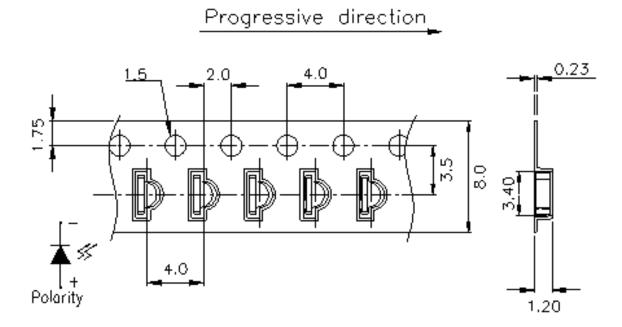

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm.

Moisture Resistant Packaging

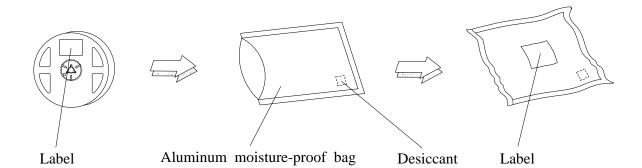

Everlight Electronics Co., Ltd. Device No. : DSE-0001684



EVERLIGHT

12-21C/T3D-CP1Q2B12Y/2C

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min \int 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp . : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 Hrs.	22 PCS.	0/1

Precautions For Use

FOREVER

1. Over-current-proof


Customer must apply resistors for protection , otherwise slight voltage shift will cause big

current change (Burn out will happen).

2. Storage

LIGHTING

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment : 60±5℃ for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

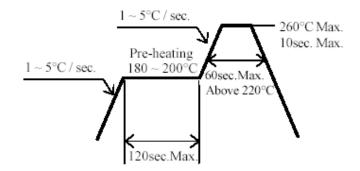

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

FOREVER


LIGHTING

<u>12-21C/T3D-CP1Q2B12Y/2C</u>

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

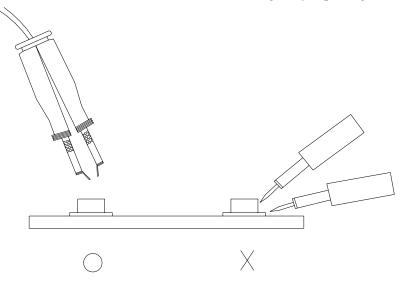

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. : DSE-0001684 http://www.everlight.com Prepared date: 8-May-2009 Rev. 2Page: 12 of 12Prepared by: YangJunyu