


The HH-1174-10 is designed to be used with high frequency switching power supplies. The components are configured to be compatible with the test setup for EN55022.
The enclosure has through holes for mounting and 0.08 diameter pins for the power connections.

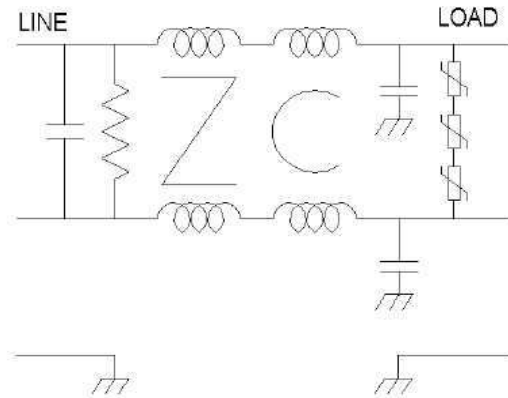

Operating voltage _____ 115/250 Vac
 Operating current _____ 10 Amp
 Operating frequency _____ 50/60 Hz



Operating temperature @ 10.0A _____ -40°C to 70°C**
 @ 9.0A _____ -40°C to 75°C**
 @ 8.7A _____ -40°C to 80°C**

** Heat sink required. The heat sink must be maintained at a maximum temperature as indicated.

Diel. withstanding (line - case) _____ 1500 Vac for 1.0 Min
 Diel. withstanding (line - line) _____ TVS diode protected (390—430) volts

Leakage current _____ 1.0ma @ 250 V, 50 Hz

Max residual voltage after 1 sec _____ 34 Volts Max.

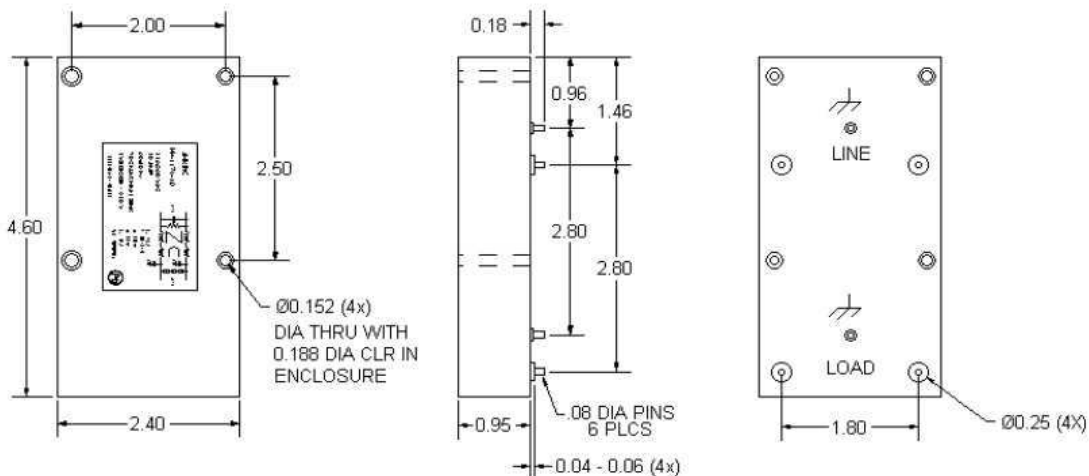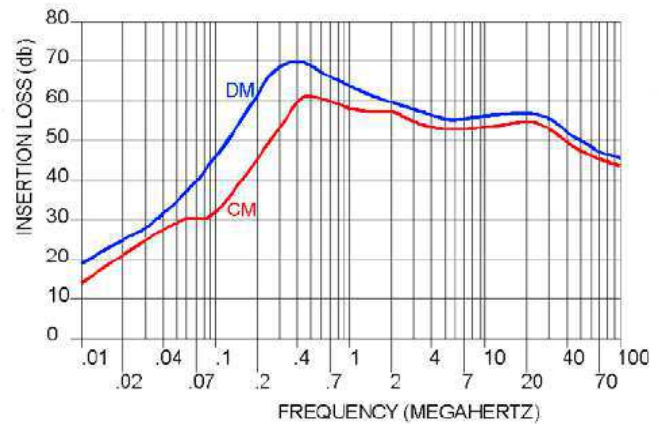

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 FX: 44-(0) 141-589-1884