



1A SYNCHRONOUS BUCK SWITCHER WITH FET ON BOARD

Production Datasheet

Pb Free Product

DESCRIPTION

The NX4108-18 is a current mode PWM buck switcher with internal compensation and fixed 1.8V output voltage, can provide up to 1A output current with FET on board. It operates from 2.8V to 5.5V which is ideal for the application with single cell Li-Ion battery as well as other 3.3V input bus supply applications. Switching frequency is fixed 1MHz, small surface mount inductors and capacitors are allowed to use, make it good for portable applications.

NX4108-18 is available in 5-pin SOT23 package.

FEATURES

- 2.8 to 5.5V Input Voltage
- Fixed 1.8V Output Voltage
- 5-pin SOT23 Package
- 1MHz Fixed Frequency PWM Operation
- Internally-compensated Current Mode Controller
- Peak Current Limit with HICCUP Feature and Over Temperature Protection
- Prebias Start-up Operation
- Pb-free and RoHS Compliant

APPLICATIONS

- Li-Ion Battery Operated Portable System
- Cellular Phones
- Portable Applications
- USB Devices

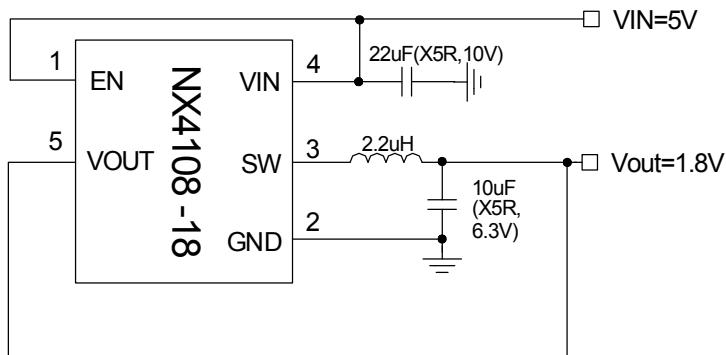
TYPICAL APPLICATION

Figure1 -Typical application of NX4108-18

ORDERING INFORMATION

Device	Temperature	Package	Pb-Free
NX4108-18CZ1TR	-40°C to 85°C	SOT23-5L	Yes


ABSOLUTE MAXIMUM RATINGS

VIN to GND	-0.3V to 6V
SW,VOUT,EN to GND	-0.3V to VIN + 0.3V
ESD Susceptibility	500V
Lead Temperature(Soldering,10sec.)	300°C
Storage Temperature Range	-55 °C to 150 °C
Operating Junction Temperature Range	-40°C to 150°C

CAUTION: Stresses above those listed in "ABSOLUTE MAXIMUM RATINGS", may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

PACKAGE INFORMATION

5-LEAD PLASTIC SOT23

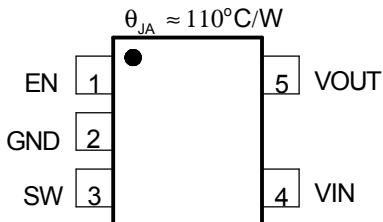

ELECTRICAL SPECIFICATIONS

$V_{IN}=3.5\text{V}$, $T_A = 25^{\circ}\text{C}$, unless otherwise specified.

PARAMETER	SYM	Test Condition	Min	TYP	MAX	Units
V_{OUT} Voltage						
V_{OUT} Voltage	V_{OUT}		1.77	1.8	1.822	V
Line Regulation						
Line Regulation		$V_{IN}=2.8\text{V}$ to 5.5V , $I_{OUT}=10\text{mA}$		3		mV
V_{IN} UVLO						
V_{IN} Rising Threshold			2.3	2.5	2.8	V
V_{IN} Falling Threshold				2.3		V
Supply Voltage(V_{IN})						
V_{IN} Input Voltage Range	V_{IN}		2.8		5.5	V
Shutdown Current	$I_{shutdown}$	$EN=GND$		1	2.5	uA
Quiescent Current	I_q	No Load, switching		8.5		mA
Oscillator (R_t)						
Frequency	F_s		849	1000	1185	kHz
Max Duty Cycle			85			%
Min ON Time				100		nS
SS						
Soft Start Time	T_{ss}			500		uS
Current Limit						
Current Limit Threshold				1.8		A

PARAMETER	SYM	Test Condition	Min	TYP	MAX	Units
Current Limit				1.8		A
Current Limit Threshold						
Thermal Shutdown				155		°C
Thermal shutdown trip point						
Hysteresis				15		°C
Internal Switch						
Rdson of Control FET		VIN= 5V		400		mohm
		VIN=3.3V		480		
Rdson of Synchronous FET		VIN= 5V		300		mohm
		VIN=3.3V		360		
Enable						
En low Threshold voltage					0.4	V
En high Threshold voltage			1.4			V

PIN DESCRIPTIONS

PIN SYMBOL	PIN DESCRIPTION
SW	SW output. Junction of the internal high-side and low-side power MOSFETs, and output inductor.
GND	Ground Connection for Chip. Connect GND with large copper areas to the input and output supply returns, and negative terminals of the input and output capacitors.
VOUT	Sense output voltage .
VIN	Supply voltage input for switcher
EN	Enable input. Set this pin to GND or less than 0.4V will shut down the regulator Enable signal can not be high when VIN is low

BLOCK DIAGRAM


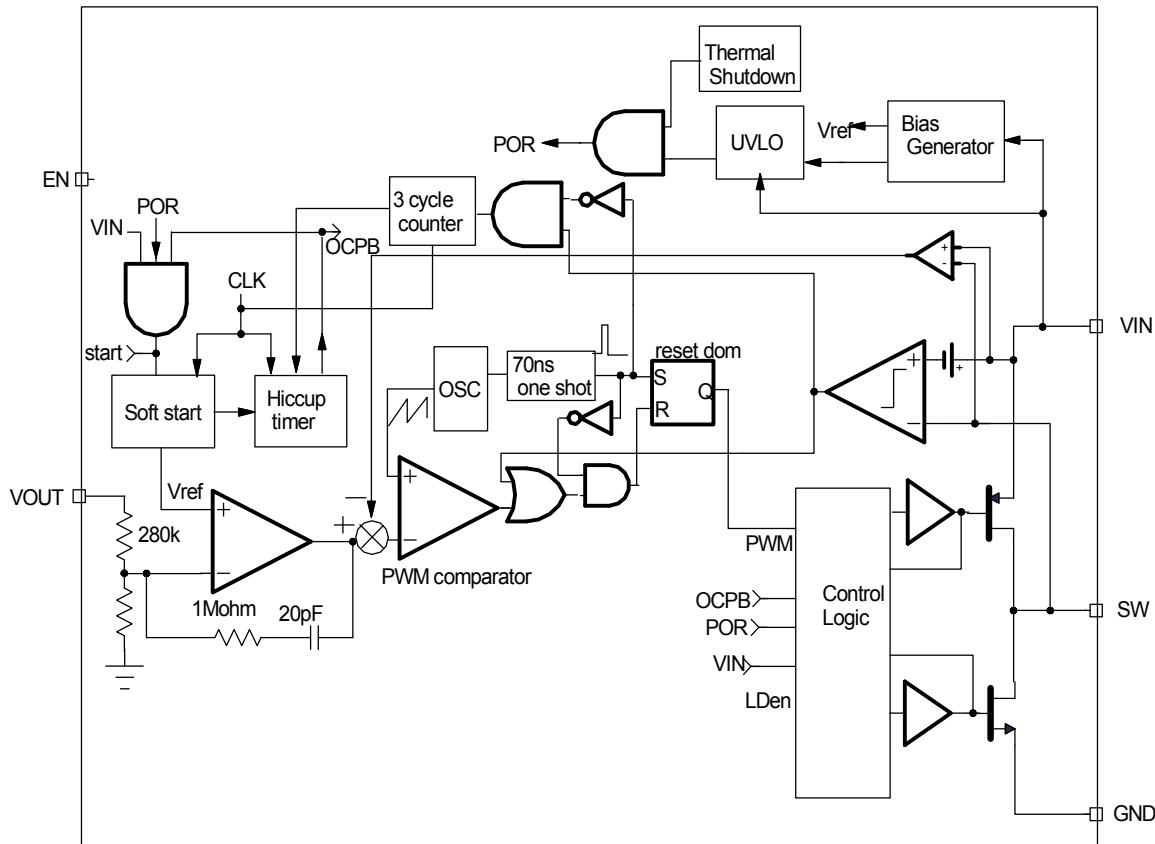


Figure 2 - Simplified block diagram of the NX4108-18

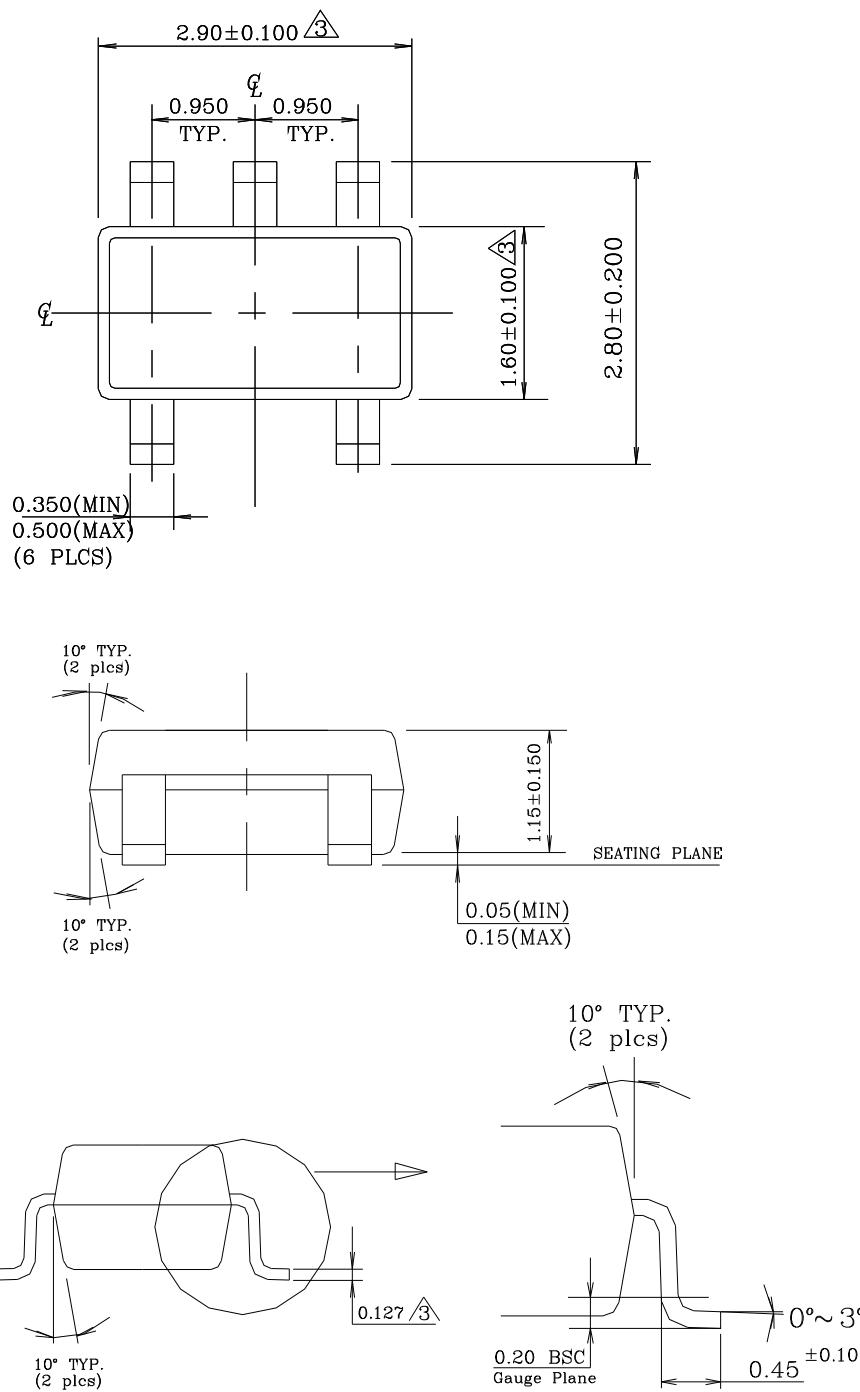

SOT23-5 Outline Dimensions

**NOTE:**

1. Dimensions and tolerances are as per ANSI Y14.5M, 1982.
2. Package surface to be matte finish VDI 11~13.

Dimensions are exclusive of mold flash and gate burr