
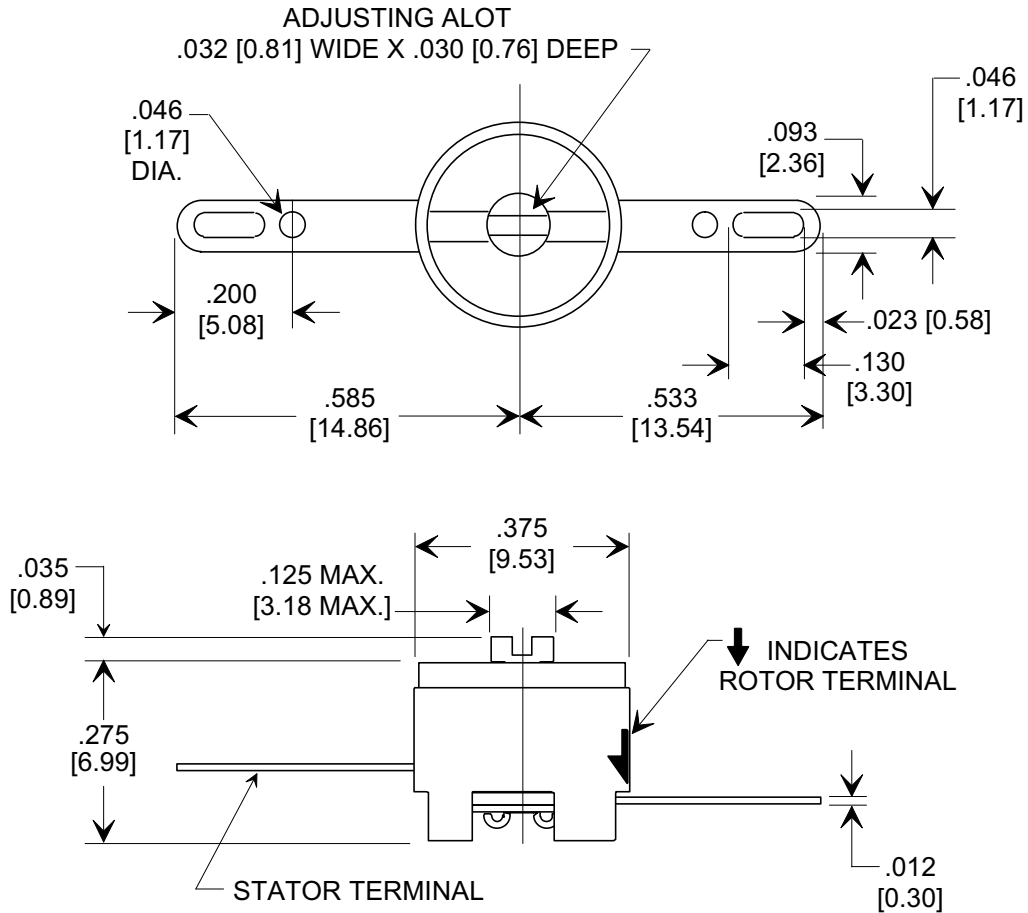



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



SPECIFICATIONS

TUSONIX PART NO.	538-000 D 3.0 - 15
Capacitance Range:	3 - 15 pF
Capacitance Tolerance:	MIN: +10% , MAX: -10% +100%
Temperature Characteristic:	DIELECTRIC CODE D
Working Voltage:	200 VDC AT +85°C 100 VDC AT +125°C
Operating Temperature Range:	-55°C TO + 125°C
To Tusonix Spec Unless Stated Otherwise	

NOTE:
ALL METAL PARTS SILVER PLATED.

FOR DIMENSIONS $\leq .125"/3.18\text{mm}$,
TOLERANCE IS $\pm .015"/0.38\text{mm}$.
FOR DIMENSIONS $\geq .126"/3.20\text{mm}$,
TOLERANCE IS $\pm .030"/0.76\text{mm}$.

X-2015 Rev-0 REVISION RECORD Original Release C.O. 20021203-1-06	TOLERANCES unless otherwise specified 2 PLC. DECIMAL ±		Title		CERAMIC TRIMMER
	3 PLC. DECIMAL ±		Drawn S.M. 12-04-02		
	ANGLES ±		Approved T.C. 12-04-02		A
	TUSONIX TUCSON, ARIZONA		538-000 D 3.0 - 15		