




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**



**Electrical Testing**  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

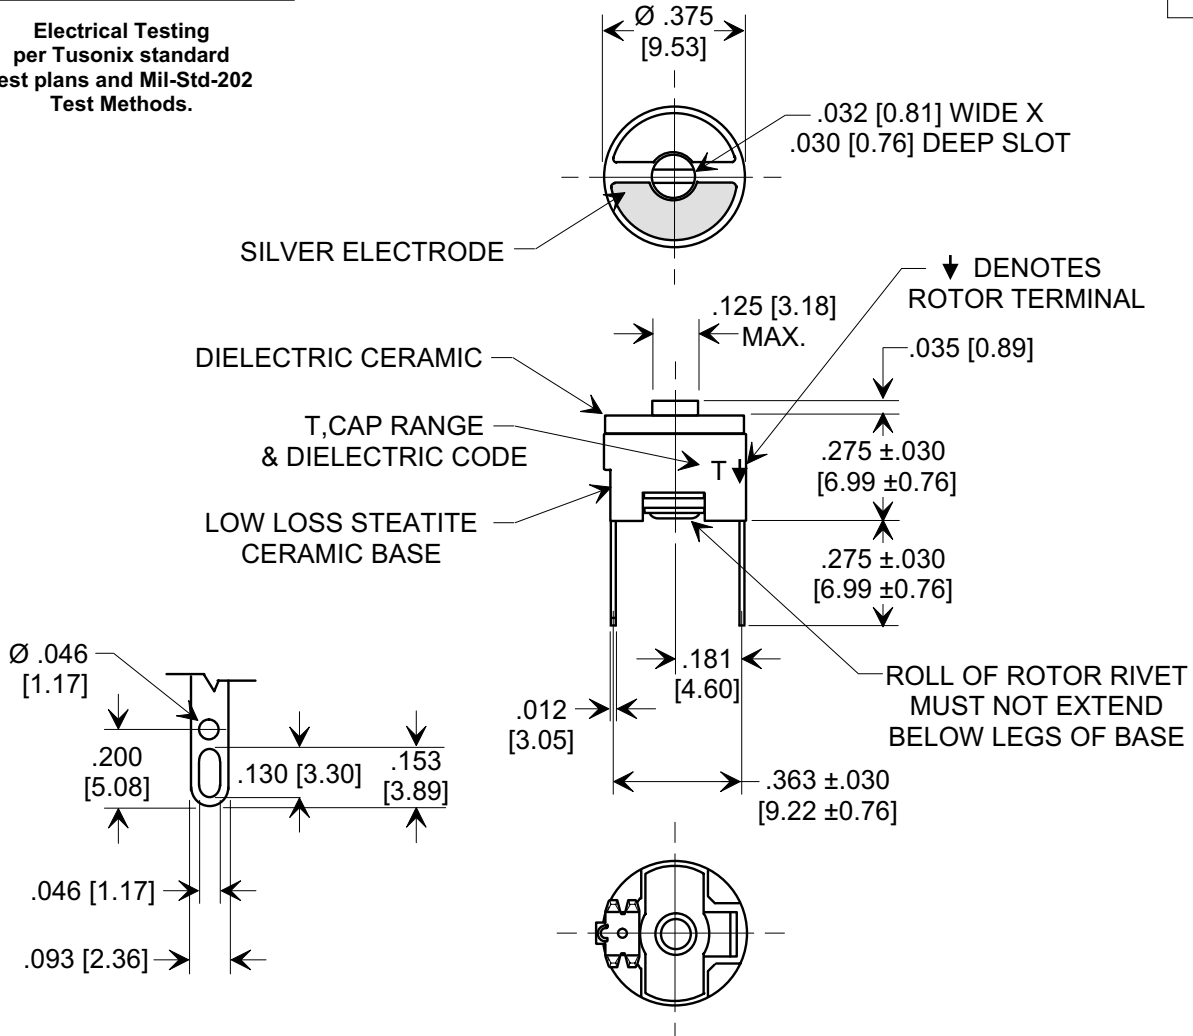

↓ DENOTES ROTOR TERMINAL

**NOTES:**

1. TUSONIX STANDARD  
 PART NUMBER: 538-002-A-2.0-8.  
 TUSONIX RoHS COMPLIANT  
 PART NUMBER: 538-002-A-2.0-8 LF.  
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. ALL METAL PARTS SILVER PLATED.
3. PART MARKING: STANDARD PART, BLACK INK; RoHS PART, GREEN INK.

FOR DIMENSIONS  $\leq .125$ "/3.18mm,  
 TOLERANCE IS  $\pm .015$ "/0.38mm.  
 FOR DIMENSIONS  $\geq .126$ "/3.20mm,  
 TOLERANCE IS  $\pm .030$ "/0.76mm.

**SPECIFICATIONS**

TUSONIX STYLE	538-002
VALUE	2.0-8 pF
VALUE TOL.	MIN. CAP + 10%, MAX. CAP -10%, +100%
Temp. Coef.	A
RATING	100 VDC
OPERATING TEMPERATURE RANGE:	-55°C TO + 125°C
INSULATION RESISTANCE:	10 G $\Omega$ MIN. @ 25° C
TO TUSONIX SPEC. UNLESS STATED OTHERWISE.	

X-2015 Rev-0 REVISION RECORD Original Release C.O. 20080118-2-01	0	TOLERANCES unless otherwise specified 2 PLC. DECIMAL $\pm$ // // 3 PLC. DECIMAL $\pm$ .015 ANGLES $\pm$ // //	Title <b>TOP ADJUST CERAMIC TRIMMER</b>	
			Drawn S.M. 01-18-08	Scale 2 X
		<b>TUSONIX</b> TUCSON, ARIZONA	Approved T.C. 01-18-08	
			<b>A</b>	<b>538-002 A 2.0-8</b>