


- △ .00038[.000015] GOLD IN THE CONTACT AREA, .00254[.000100] MATTE TIN-LEAD ON REMAINDER OF CONTACT, ALL OVER .00127[.000050] NICKEL.
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS.
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- △ ON ASSEMBLIES WITH FOUR OR MORE POSITIONS, TWO POLARIZATION SLOTS. ON ASSEMBLIES WITH TWO OR THREE POSITIONS, ONE POLARIZATION SLOT.
- △ AMP TRADEMARK MOLDED ON THIS SURFACE.
- 6. FOR USE WITH 1.57 ± 0.20 [.062 ± .008] PRINTED CIRCUIT BOARD.
- △ .00038[.000015] GOLD IN THE CONTACT AREA, .00254[.000100] MATTE TIN ON REMAINDER OF CONTACT, ALL OVER .00127[.000050] NICKEL.
- △ PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- △ HIGH TEMPERATURE CONFIGURATION.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

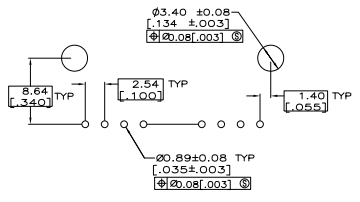

SEE SHEET 2 FOR PART NUMBER TABLES

DIMENSIONS		UNITS		SCALE		DATE		REV	
2	PLN	108-25034	108-25034	114-25026	114-25026	108-25034	114-25026	108-25034	114-25026
DIMENSIONS		UNITS		SCALE		DATE		REV	
DIMENSIONS		UNITS		SCALE		DATE		REV	
DIMENSIONS		UNITS		SCALE		DATE		REV	

REMARKS	PLATING	C	B	A	NO. OF POSN	PART NO.
△	△	64.01 [2.520]	66.04 [2.600]	24	25	7-103673-4
△	△	61.47 [2.420]	63.50 [2.500]	23	24	7-103673-3
△	△	58.93 [2.320]	60.96 [2.400]	22	23	7-103673-2
△	△	56.39 [2.220]	58.42 [2.300]	21	22	7-103673-1
△	△	53.85 [2.120]	55.88 [2.200]	20	21	7-103673-0
△	△	51.31 [2.020]	53.34 [2.100]	19	20	6-103673-9
△	△	48.77 [1.920]	50.80 [2.000]	18	19	6-103673-8
△	△	46.23 [1.820]	48.26 [1.900]	17	18	6-103673-7
△	△	43.69 [1.720]	45.72 [1.800]	16	17	6-103673-6
△	△	41.15 [1.620]	43.18 [1.700]	15	16	6-103673-5
△	△	38.61 [1.520]	40.64 [1.600]	14	15	6-103673-4
△	△	36.07 [1.420]	38.10 [1.500]	13	14	6-103673-3
△	△	33.53 [1.320]	35.56 [1.400]	12	13	6-103673-2
△	△	30.99 [1.220]	33.02 [1.300]	11	12	6-103673-1
△	△	28.45 [1.120]	30.48 [1.200]	10	11	6-103673-0
△	△	25.91 [1.020]	27.94 [1.100]	9	10	5-103673-9
△	△	23.37 [.920]	25.40 [1.000]	8	9	5-103673-8
△	△	20.83 [.820]	22.86 [.900]	7	8	5-103673-7
△	△	18.29 [.720]	20.32 [.800]	6	7	5-103673-6
△	△	15.75 [.620]	17.78 [.700]	5	6	5-103673-5
△	△	13.21 [.520]	15.24 [.600]	4	5	5-103673-4
△	△	10.67 [.420]	12.70 [.500]	3	4	5-103673-3
△	△	8.13 [.320]	10.16 [.400]	2	3	5-103673-2
△	△	5.59 [.220]	7.62 [.300]	1	2	5-103673-1

PLATING	C	B	A	NO. OF POSN	PART NO.	
△	△	41.15 [1.620]	43.18 [1.700]	15	16	2-103673-6
△	△	18.29 [.720]	20.32 [.800]	6	7	2-103673-5
△	△	64.01 [2.520]	66.04 [2.600]	24	25	2-103673-4
△	△	61.47 [2.420]	63.50 [2.500]	23	24	2-103673-3
△	△	58.93 [2.320]	60.96 [2.400]	22	23	2-103673-2
△	△	56.39 [2.220]	58.42 [2.300]	21	22	2-103673-1
△	△	53.85 [2.120]	55.88 [2.200]	20	21	2-103673-0
△	△	51.31 [2.020]	53.34 [2.100]	19	20	1-103673-9
△	△	48.77 [1.920]	50.80 [2.000]	18	19	1-103673-8
△	△	46.23 [1.820]	48.26 [1.900]	17	18	1-103673-7
△	△	43.69 [1.720]	45.72 [1.800]	16	17	1-103673-6
△	△	41.15 [1.620]	43.18 [1.700]	15	16	1-103673-5
△	△	38.61 [1.520]	40.64 [1.600]	14	15	1-103673-4
△	△	36.07 [1.420]	38.10 [1.500]	13	14	1-103673-3
△	△	33.53 [1.320]	35.56 [1.400]	12	13	1-103673-2
△	△	30.99 [1.220]	33.02 [1.300]	11	12	1-103673-1
△	△	28.45 [1.120]	30.48 [1.200]	10	11	1-103673-0
△	△	25.91 [1.020]	27.94 [1.100]	9	10	103673-9
△	△	23.37 [.920]	25.40 [1.000]	8	9	103673-8
△	△	20.83 [.820]	22.86 [.900]	7	8	103673-7
△	△	18.29 [.720]	20.32 [.800]	6	7	103673-6
△	△	15.75 [.620]	17.78 [.700]	5	6	103673-5
△	△	13.21 [.520]	15.24 [.600]	4	5	103673-4
△	△	10.67 [.420]	12.70 [.500]	3	4	103673-3
△	△	8.13 [.320]	10.16 [.400]	2	3	103673-2
△	△	5.59 [.220]	7.62 [.300]	1	2	103673-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNED BY: J. SHAFER
 DRAWN BY: J. GEFORD
 CHECKED BY: J. GEFORD

DATE: 108-25034
 114-25026

REVISIONS: A1 (0779) 103673

DESCRIPTION: HDR ASSY, RTANG, SINGLE ROW
 2.54[100] C/A 0.64[25] SQ. POST.
 WITH PLZN & HOLD DOWNS, AMPMODU MTE

SCALE: 4:1
 SHEET: 2 OF 2