

4

3

2

1

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION 2006

© COPYRIGHT 2006

ALL RIGHTS RESERVED.

LOC AI DIST -


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
A3		ECR-10-010420	24AUG10	RK	SRE
A4		REVISED PER ECR-10-025774	07JUN11	KK	HMR

POS. PER ROW	L +0.3 -0.6	PART - NO.	POS. PER ROW	L +0.3 -0.6	PART - NO.
-	-	-	26	66.04	2- 828 430-6
2	5.08	828 430-2	27	68.58	2- -7
3	7.62	△ -3	28	71.12	2- -8
4	10.16	↑ -4	29	73.66	2- -9
5	12.70		30	76.20	△ 3- -0
6	15.24	△ -5	31	78.74	△ 3- -1
7	17.78	△ -6	32	81.28	△ 3- -2
8	20.32	△ -7	33	83.82	3- -3
9	22.86	△ -8	34	86.36	3- -4
10	25.40	1- -9	35	88.90	3- -5
11	27.94	△ 1- -0	36	91.44	△ 3- -6
12	30.48	1- -1	37	93.98	△ 3- -7
13	33.02	△ 1- -2	38	96.52	△ 3- -8
14	35.56	1- -3	39	99.06	△ 3- -9
15	38.10	△ 1- -4	40	101.60	△ 4- -0
16	40.64	△ 1- -5	41	104.14	△ 4- -1
17	43.18	△ 1- -6	42	106.68	△ 4- -2
18	45.72	△ 1- -7	43	109.22	△ 4- -3
19	48.26	1- -8	44	111.76	△ 4- -4
20	50.80	△ 2- -9	45	114.30	△ 4- -5
21	53.34	2- -0	46	116.84	△ 4- -6
22	55.88	△ 2- -1	47	119.38	△ 4- -7
23	58.42	2- -2	48	121.92	△ 4- -8
24	60.96	△ 2- -3	49	124.46	△ 4- -9
25	63.50	△ 2-828 430-5	50	127.00	△ 5-828 430-0


0.8 MAX. TYP.

SECTION A-A 10:1

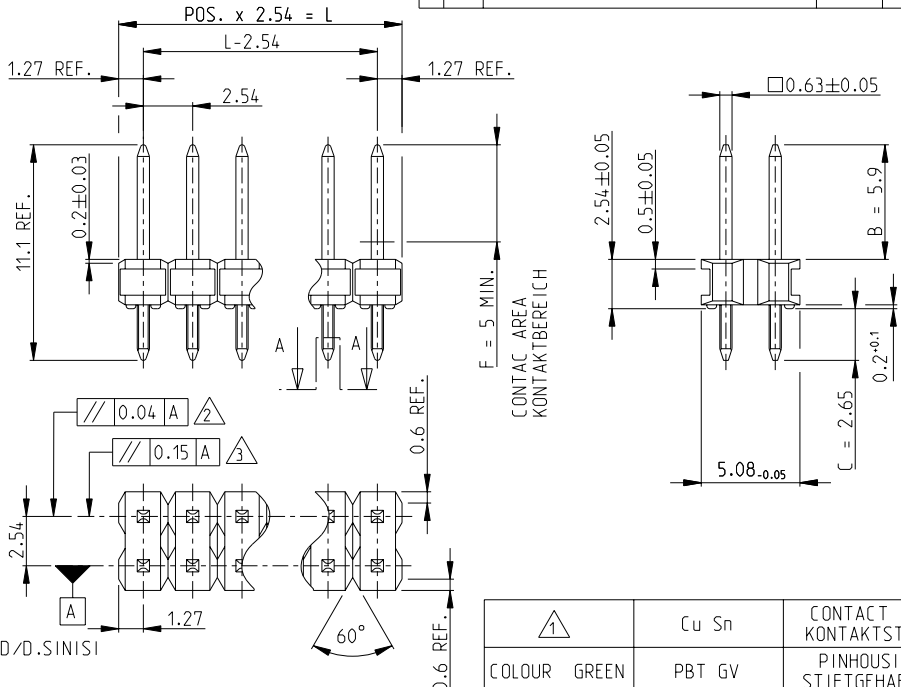

- 1 0.8 µm GOLD AT AREA F OVER 1.27 µm NICKEL AT AREA B MIN. 3 µm TIN OVER 1.27 µm NICKEL AT AREA C
- 2 FROM -2 TILL 3- -6
- 3 FROM 3- -7 TILL 5- -0
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 5 OBSOLETE

PC BOARD LAYOUT LEITERPLATTENANSCHLUSSBILD

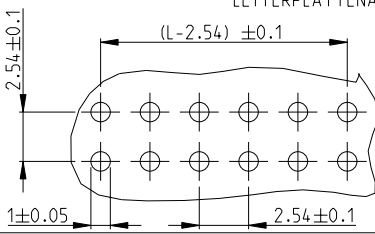

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	±0.1
1 PLC	±0.1
2 PLC	±0.1
3 PLC	±
4 PLC	±
ANGLES	±2°
MATERIAL	FINISH

DWN	A.HO	27MRZ1986
CHK	M.SCHAARSCHEIDT	02APR1986
APVD	-	-
PRODUCT SPEC	108-18012	-
APPLICATION SPEC	-	-
WEIGHT	-	-
CUSTOMER DRAWING	-	-

		TE Connectivity
AMPMODU II PINHEADER DUAL ROW STIFTELEISTE ZWEIREIHIG		
SIZE	CAGE CODE	DRAWING NO
A3	00779	C-828430
RESTRICTED TO	SCALE	SHEET
-	5:1	1 OF 1
REV	A4	