

BAT54 / A / C / S Rots Pro

L

SOT-23

Min

0.37

1.19

2.10

0.89

0.45

1.78

2.65

0.013

0.89

0.45

0.076

All Dimensions in mm

Max

0.51

1.40

2.50

1.05

0.61

2.05

3.05

0.15

1.10

0.61

0.178

## SURFACE MOUNT SCHOTTKY BARRIER DIODE

С

**→** D

Н

G

M

Dim

AB

С

D

Е

G

н

J

κ

L


М

### Features

- Low Turn-on Voltage
- Fast Switching
- PN Junction Guard Ring for Transient and ESD Protection
- Designed for Surface Mount Application
- Plastic Material UL Recognition Flammability Classification 94V-O

## **Mechanical Data**

- Case: SOT-23, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: See Diagrams Below
- Weight: 0.008 grams (approx.)
- Marking: Device Code, See Page 3
- Mounting Position: Any
- Lead Free: For RoHS / Lead Free Version, Add "-LF" Suffix to Part Number, See Page 4





BAT54A



BAT54C

BAT54S

## Maximum Ratings and Electrical Characteristics, Single Diode @TA=25° C unless otherwise specified

В

Κ

Characteristic	Symbol	Value	Unit	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	Vrrm Vrwm Vr	30	V	
Forward Continuous Current (Note 1)		lF	200	mA
Repetitive Peak Forward Current (Note 1)		IFRM	300	mA
Forward Surge Current (Note 1)	@ t < 1.0s	IFSM	600	mA
Power Dissipation (Note 1)		Pd	200	mW
Typical Thermal Resistance, Junction to Ambient Air (Note 1)		RθJA	500	K/W
Operating and Storage Temperature Range		Тј, Тѕтс	-65 to +125	°C


Note: 1. Device on fiberglass substrate.

# Maximum Ratings and Electrical Characteristics, Single Diode @T<sub>A</sub>=25°C unless otherwise specified

Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
Reverse Breakdown Voltage	V(BR)R	30	—	—	V	@ I <sub>RS</sub> = 100μA
Forward Voltage	VF	_	_	240 320 400 500 1000	mV	tp < $300\mu$ s, duty cycle < 2% @ I <sub>F</sub> = 0.1mA @ I <sub>F</sub> = 1mA @ I <sub>F</sub> = 10mA @ I <sub>F</sub> = 30mA @ I <sub>F</sub> = 100mA
Reverse Leakage Current	IR	_	_	2.0	μA	tp < 300 $\mu$ s, duty cycle < 2% @ V <sub>R</sub> = 25V
Junction Capacitance	Cj	_	—	10	pF	V <sub>R</sub> = 1.0V, f = 1.0MHz
Reverse Recovery Time	trr	_	_	5.0	nS	$I_F$ = 10mA through $I_R$ = 10mA to $I_R$ = 1.0mA, $R_L$ = 100 $\Omega$

#### MARKING INFORMATION **RECOMMENDED FOOTPRINT** 0.035 (0.90) XX 0.079 (2.0) t = Device Code, See Table Below хх 0.035 (0.90) BAT54A BAT54C Mfg Site BAT54 BAT54S ŧ TW Plant L4 L42 L43 L44 0.031 0.037 (0.8) (0.95) inches(mm) CN Plant KL1 KL2 KL3 KL4

## PACKAGING INFORMATION

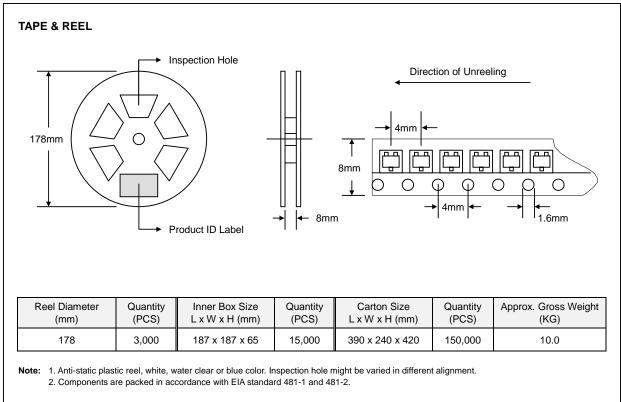

## **ORDERING INFORMATION**

Product No.	Package Type	Shipping Quantity		
BAT54-T1	SOT-23	3000/Tape & Reel		
BAT54A-T1	SOT-23	3000/Tape & Reel		
BAT54C-T1	SOT-23	3000/Tape & Reel		
BAT54S-T1	SOT-23	3000/Tape & Reel		

1. Shipping quantity given is for minimum packing quantity only. For minimum

To order quantity, please consult the Sales Department. To order RoHS / Lead Free version (with Lead Free finish), add "-LF" suffix to part number above. For example, BAT54-T1-LF. 2.

Won-Top Electronics Co., Ltd (WTE) has checked all information carefully and believes it to be correct and accurate. However, WTE cannot assume any responsibility for inaccuracies. Furthermore, this information does not give the purchaser of semiconductor devices any license under patent rights to manufacturer. WTE reserves the right to change any or all information herein without further notice.

WARNING: DO NOT USE IN LIFE SUPPORT EQUIPMENT. WTE power semiconductor products are not authorized for use as critical components in life support devices or systems without the express written approval.

Won-Top Electronics Co., Ltd. No. 44 Yu Kang North 3rd Road, Chine Chen Dist., Kaohsiung, Taiwan Phone: 886-7-822-5408 or 886-7-822-5410 Fax: 886-7-822-5417 Email: sales@wontop.com Internet: http://www.wontop.com

We power your everyday.