

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APVD
		K2		REVISED PER ECO-11-004587	11MAR11	RK	HMR

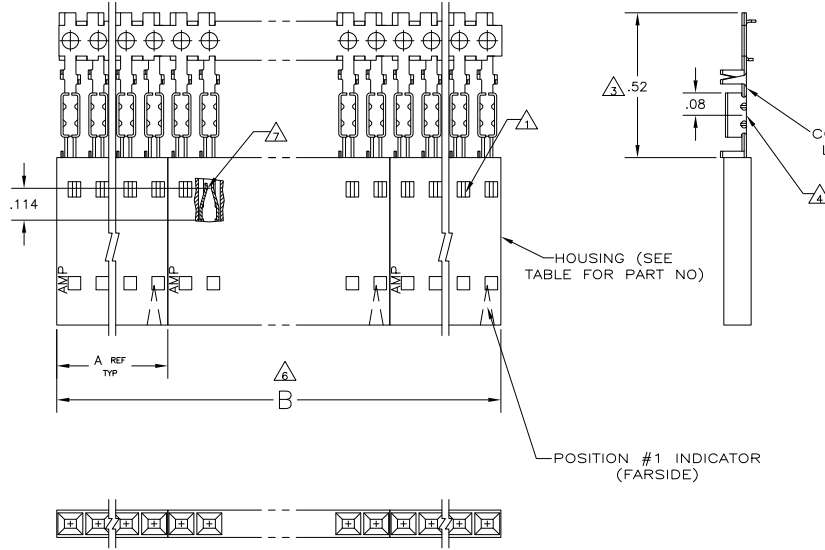

- △ CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △ USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △ THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103902
- △ ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- △ MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- △ FINISH: CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- △ FINISH: CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	2	2.40	1.198	1-103688-1	12	6-103976-1
	2	2.20	1.098	1-103688-0	11	6-103976-0
	2	2.00	.998	103688-9	10	5-103976-9
	2	1.80	.898	103688-8	9	5-103976-8
	2	1.60	.798	103688-7	8	5-103976-7
	2	1.40	.698	103688-6	7	5-103976-6
	4	2.39	.598	103688-5	6	5-103976-5
	4	1.99	.498	103688-4	5	5-103976-4
	5	1.99	.398	103688-3	4	5-103976-3
	8	2.40	.298	103688-2	3	5-103976-2
10	2.00	.198	103688-1	2	5-103976-1	
OBSOLETE	2	2.40	1.198	1-103688-1	12	1-103976-1
	2	2.20	1.098	1-103688-0	11	1-103976-0
	2	2.00	.998	103688-9	10	103976-9
	2	1.80	.898	103688-8	9	103976-8
	2	1.60	.798	103688-7	8	103976-7
	2	1.40	.698	103688-6	7	103976-6
	4	2.39	.598	103688-5	6	103976-5
	4	1.99	.498	103688-4	5	103976-4
	5	1.99	.398	103688-3	4	103976-3
	8	2.40	.298	103688-2	3	103976-2
10	2.00	.198	103688-1	2	103976-1	

△ SUPERSEDED BY 5-103976-6



EXAMPLE: STRIP ASSEMBLY SCALE 2:1

PLATING	△	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP
---------	---	---	---	---------------------	------------	-------------------------------

THIS DRAWING IS A CONTROLLED DOCUMENT. **TE** Connectivity

DIMENSIONS: INCHES	0 PLG ± .005	1 PLG ± .005	2 PLG ± .005	3 PLG ± .005	4 PLG ± .005	ANGLES ± .005	FINISH SEE TABLE
MATERIAL: HOUSING: FLAME RESISTANT THERMOPLASTIC. COLOR: BLACK. CONTACTS: PHOS BRONZE.	L. MAYER 05 NOV 06 P. C. DEJONG 12-11-06 P. C. DEJONG 12-11-06 PRODUCT SPEC: 108-25034 APPLICATION SPEC: 114-25026 WEIGHT: - CUSTOMER DRAWING						
RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L FOR NOS22-NOS26 AWG WIRE SIZE, STRIP FORM				SIZE: CASE CODE (DRAWING NO)		RESTRICTED TO: A2 00779 C=103976	
SCALE: 4:1				SHEET: 1 of 1		REV: K2	

103976

A