

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0190170083](#)  
**Status:** **Obsolete**  
**Description:** InsulKrimp™ Quick Disconnect, Female, for 12-14 (3.30-2.00) Wire, Metal Strip, Tab 4.75mm (.187") x 0.51mm (.020")

**Documents:**

**Agency Certification**

UL E79133

**General**

Product Family Quick Disconnects  
 Series [19017](#)  
 Crimp Quality Equipment Yes  
 Product Name InsulKrimp™  
 Type Quick Disconnect

**Physical**


Barrel Type Closed  
 Flammability 94V-2  
 Gender Female  
 Glow-Wire Compliant No  
 Insulation PVC  
 Lock to Mating Part None  
 Material - Metal Brass  
 Orientation Straight  
 Packaging Type Reel  
 Polarized to Mating Part No  
 Tab Thickness 0.51mm (.020")  
 Tab Width 4.75mm (.187")  
 Temperature Range - Operating -50°C to +105°C  
 Wire Insulation Diameter 4.40mm (.175") max.  
 Wire Size AWG 12, 14  
 Wire Size mm² 2.00 - 3.30

**Electrical**

Voltage - Maximum 600V

**Material Info**

Old Part Number PZ-2139

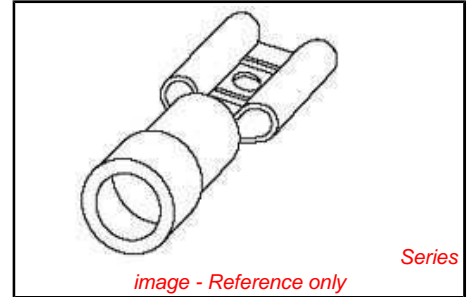

**EU RoHS**

**ELV and RoHS Compliant**

**REACH SVHC**

Not Reviewed

**Low-Halogen Status**

**Not Reviewed**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[19017Series](#)

**Application Tooling | [FAQ](#)**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

| Description   | Product #                  |
|---|----------------------------|
| ASP Tool Kit, Perishable, Used in an ASP-200 Press that Processes Metal Strip Product | <a href="#">0192870129</a> |

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**