


NOTES: UNLESS OTHERWISE SPECIFIED

- 1. P/N: XMCOLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.0001 [0.00254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

- 2. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

- 3. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

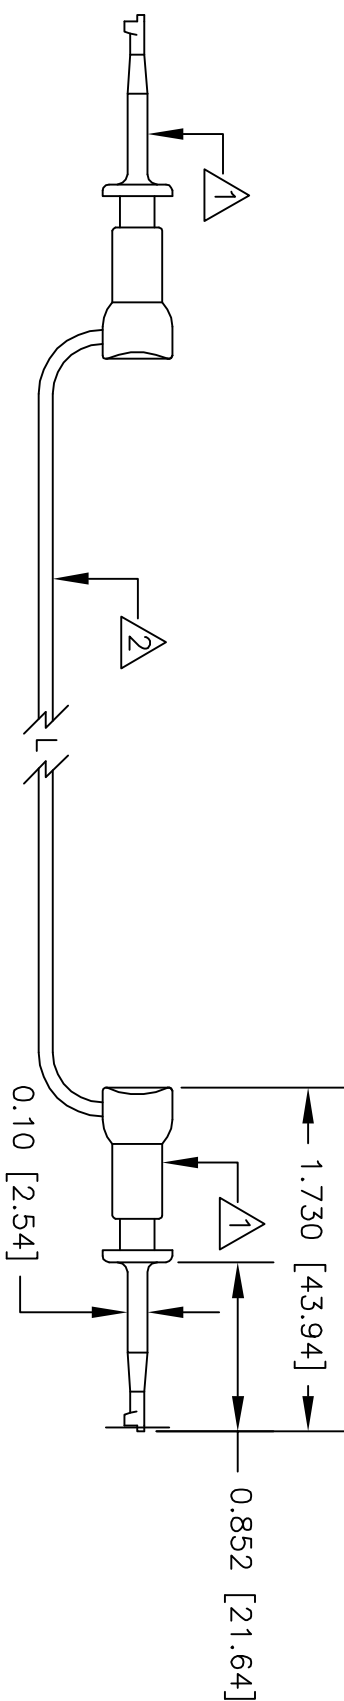

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		CONTRACT NO.		APPROVALS		DATE		DESCRIPTION	
		MATERIAL SEE NOTE.				DRAWN		R.L.		10/10	
		FINISH SEE NOTE.				APPROVED BY				MICRO-HOOK (XM) JUMPER	
NEXT ASSY		USED ON								SIZE CODE IDENT NO. DRAWING NO.	
APPLICATION		DO NOT SCALE DRAWING								A 08505 204XM	
										SCALE 1:1	
										SHEET 1 OF 1	

LTR		REVISIONS		DATE		APPROVED	