

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APP		
	D2	REVISED PER ECO-11-004917	11MAR11	RK	HMR		

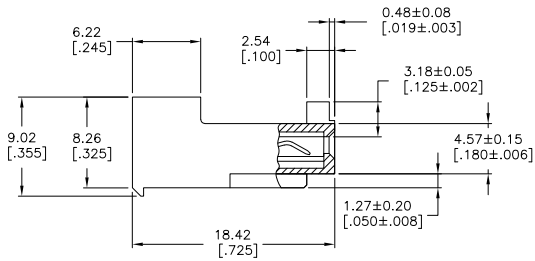

- 1. MATERIAL: CONNECTOR - NYLON UL94-V2 (RED)
CONTACTS - 0.30[.012] THICK COPPER ALLOY (BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK FOR CONTACTS 644463-2 THRU 1-644463-4). (MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN. THICKNESS OVER NICKEL UNDERPLATE FOR 3-644463-2 THRU 4-644463-4).
- 2. CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] POST AND REMAIN LOCKED IN POSITION.
- 4. IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6. HOUSING FEATURES ARE: CLOSED END WITHOUT LOCKING RAMP AND WITH POLARIZING TAB.
- 7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	DESCRIPTION	DATE	BY	APP
55.47[2.184]	14	4-644463-4		
51.51[2.028]	13	4-644463-3		
47.55[1.872]	12	4-644463-2		
43.59[1.716]	11	4-644463-1		
39.62[1.560]	10	4-644463-0		
35.66[1.404]	9	3-644463-9		
31.70[1.248]	8	3-644463-8		
27.74[1.092]	7	3-644463-7		
23.77[.936]	6	3-644463-6		
19.81[.780]	5	3-644463-5		
15.85[.624]	4	3-644463-4		
11.89[.468]	3	3-644463-3		
7.92[.312]	2	3-644463-2		



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRN S. CARPENTER 21.AJA2003	CHK D. BOSSI 21.AJA2003	DATE 21.AJA2003	NAME
0 PLC ± .	1 PLC ± .	2 PLC ± .	3 PLC ± 0.13 [005]	4 PLC ± .	ANGLES ± .
MATERIAL	FINISH	APPROD 108-1051	PRODUCT SPEC	APPLICATION SPEC 114-1020	WEIGHT
TE Connectivity		MTA 156 CONNECTOR ASSEMBLY, 22 AWG, STANDARD		SIZE CASE CODE DRAWING NO	RESTRICTED TO
CUSTOMER DRAWING		A2 00779 C=644463		SCALE 4:1	SHEET 1 of 1 REV D2