



MYRRA - SERIE 45000 UI 30 3-10 VA

Primary voltage 115 V - 230 V
UI 30 x 5,5 2 VA

Reference	Secondary Voltage V	Secondary Currant mA	No-load Voltage V	Ambient, Temperature C
45292	2 x 6	2 x 167	2 x 10,2	T 70 B
45293	2 x 9	2 x 111	2 x 15,9	T 70 B
45294	2 x 12	2 x 83	2 x 20,4	T 70 B
45295	2 x 15	2 x 67	2 x 25,5	T 70 B
45296	2 x 18	2 x 56	2 x 30,6	T 70 B
45297	2 x 24	2 x 42	2 x 40,8	T 70 B

Primary voltage 115 V - 230 V
UI 30 x 5,5 second protection mA 3 VA

Protection	Reference	Secondary Voltage V	Secondary Currant mA	No-load Voltage V	Ambient, Temperature C
250	45013	2 x 6	2 x 250	2 x 9,8	T 70 B
160	45014	2 x 9	2 x 167	2 x 14,7	T 70 B
125	45015	2 x 12	2 x 125	2 x 19,6	T 70 B
100	45016	2 x 15	2 x 100	2 x 24,5	T 70 B
80	45017	2 x 18	2 x 83	2 x 29,5	T 70 B
63	45018	2 x 24	2 x 63	2 x 39,3	T 70 B

Primary voltage 115 V - 230 V
UI 30 x 5,5 second protection mA 3 VA

Protection	Reference	Secondary Voltage V	Secondary Currant mA	No-load Voltage V	Ambient, Temperature C
315	45019	2 x 6	2 x 333	2 x 9,4	T 70 B
250	45020	2 x 9	2 x 222	2 x 14,0	T 70 B
160	45021	2 x 12	2 x 167	2 x 18,6	T 70 B
125	45022	2 x 15	2 x 133	2 x 23,3	T 70 B
125	45023	2 x 18	2 x 111	2 x 28,0	T 70 B
80	45024	2 x 24	2 x 83	2 x 37,4	T 70 B


Primary voltage 115 V - 230 V
UI 30 x 10,5 second protection mA 6 VA

Protection	Reference	Secondary Voltage V	Secondary Current mA	No-load Voltage V	Ambient, Temperature C
500	45025	2 x 6	2 x 500	2 x 8,1	T 70 B
315	45026	2 x 9	2 x 333	2 x 12,1	T 70 B
250	45027	2 x 12	2 x 250	2 x 16,2	T 70 B
200	45028	2 x 15	2 x 200	2 x 20,2	T 70 B
160	45029	2 x 18	2 x 167	2 x 24,3	T 70 B
125	45030	2 x 24	2 x 125	2 x 32,3	T 70 B

Primary voltage 115 V - 230 V
UI 30 x 16,5 second protection mA 10 VA

Protection	Reference	Secondary Voltage V	Secondary Current mA	No-load Voltage V	Ambient, Temperature C
125/63	45031	2 x 6	2 x 833	2 x 7,9	T 50 B
125/63	45032	2 x 9	2 x 556	2 x 11,9	T 50 B
125/63	45033	2 x 12	2 x 417	2 x 15,9	T 50 B
125/63	45034	2 x 15	2 x 333	2 x 19,8	T 50 B
125/63	45035	2 x 18	2 x 278	2 x 23,7	T 50 B
125/63	45036	2 x 24	2 x 208	2 x 31,7	T 50 B

- 115 V - 230 V supply voltage by series/parallel connection
- Vacuum filling
- Two compartments bobbins
- Degree of protection IP 00
- Resin UL 94 VO
- Fuse protection in secondary winding (see diagram)
- Insulation voltage 4KV (6 KV MYRRA test)
- 100 % tested production
- Conform to EN 60742
- Approval under process
- UL 506 approved

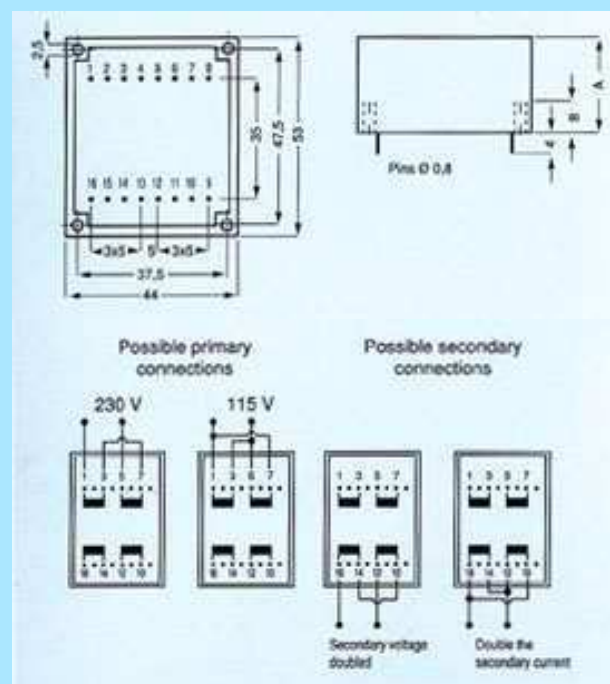

CIRCUIT	RATING	DIMENSION A	WEIGHT
UI 30 x 5,5	2 VA/3 VA	A = 17 mm	125 g
UI 30 x 7,5	4 VA	A = 19 mm	150 g
UI 30 x 10,5	6 VA	A = 22 mm	185 g
UI 30 x 16,5	10 VA	A = 28 mm	260 g