

4






3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2004.  
 © COPYRIGHT 2004 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	O	RELEASED	FJBO-0871-04	24AUG04	C.W I.E	
	O1	REVISED PER ECO-09-024927	09NOV09	KK	AEG	

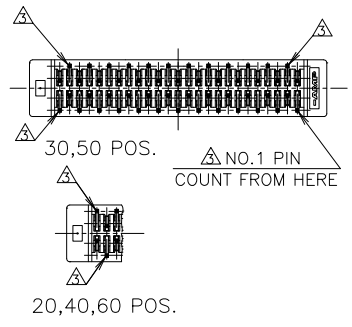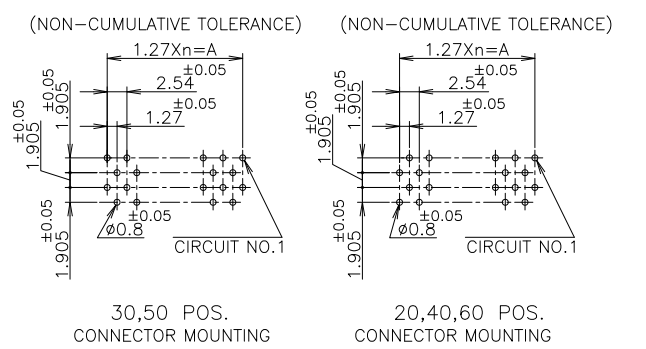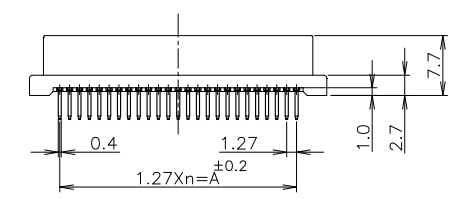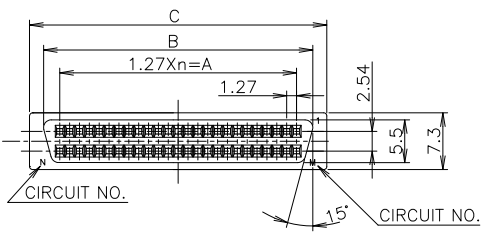

- △ MATERIAL & FINISH  
 PLUG HOUSING: THERMOPLASTIC (UL94V-0)  
 COLOR: BLACK.  
 REC CONTACT: COPPER ALLOY.  
 FINISH: OVER NICKEL, MATING END:  
 0.0002 OR 0.00076 MIN. GOLD,  
 TERMINATION END: TIN. AND SEALING TREATMENT  
 ALL OVER.
- 2 P.W.B. LAYOUT AND P.W.B. TREATMENT (REF.)  
 P.W.B. SURFACE ARE TREATED WITH SOLDER RESIST.  
 BOARD THICKNESS: 1.6mm.
- △ ON KINK POINT (4 PLACES).
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REMARK	N	M	A	B	C	n	POS.	PART NO.		
△ OBSOLETE	Au PL.	20	11	11.43	15.60	19.20	9	20	6-	-5
	0.00076	60	31	36.83	41.00	44.60	29	60	6-	-4
	MIN.	50	26	30.48	34.65	38.26	24	50	6-	-3
△ OBSOLETE		40	21	24.13	28.30	31.90	19	40	6-	-2
		30	16	17.78	21.95	25.55	14	30	6-	-1
	Au PL.	20	11	11.43	15.60	19.20	9	20		-5
	0.0002	60	31	36.83	41.00	44.60	29	60		-4
	MIN.	50	26	30.48	34.65	38.26	24	50		-3
		40	21	24.13	28.30	31.90	19	40		-2
		30	16	17.78	21.95	25.55	14	30		-1

LEAD FREE

GENERAL TOLERANCE
10 ≥ : ±0.2
30 ≥ > 10 : ±0.25
100 ≥ > 30 : ±0.3
ANGLES : ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN: COREL WANG 24AUG04	APVD: STEVEN YAO 24AUG04	NAME: I. ENOMOTO	PRODUCT SPEC: 108-60036	APPLICATION SPEC:	WEIGHT:	SIZE: A3	CAGE CODE: 00779	DRAWING NO: C-5175710	RESTRICTED TO:
	0 PLC ±-			Tyco Electronics AMP K.K. Kawasaki, Japan				PLUG ASSY V WITH KINK AMPLIMITE .050 SERIES I B-TO-B CONN.			
	1 PLC ±-							SCALE: NTS		SHEET 1 OF 1 REV 01	
	2 PLC ±-							CUSTOMER DRAWING			
	3 PLC ±-										
	4 PLC ±-										
	ANGLES ±-										