

**CONFIDENTIAL**


www.fciconnect.com		surface	-	tolerance std	ISO 1302	ISO 406	ISO 1101	projection	MM / INCH
		TOLERANCES UNLESS OTHERWISE SPECIFIED					size		A3
		ANGULAR	LINEAR	0.X	±0.3	0.XX	±0.13	ECN	S10-0064
		0°	±2°	0.XXX	±0.051			Spec ref	-
Dr	JPEH	2002-07-19							
Eng	JPEH	2002-07-19							
Chr	KH LEE	2010-03-24							
Appr	JOEY NG	2010-03-24	Product family		LPVCC		Spec ref		-
FCI		LPVCC		4.5 TOP ENTRY SMT ASSY		55510		Rev. G	
catalog no		CUSTOMER		sheet 1 of 3					

REV E - 2006-03-28



NOTES:

- 1. HOUSING MATERIAL : HIGH TEMP PLASTIC.
- 2. TERMINAL MATERIAL : PHOSPHOR BRONZE.
- 3. TERMINAL RETENTION 0.5Kg/1.1 Lbs
- ④ 'V' CUT OPTIONAL - MANUFACTURING PROCESS OPTION.
- ⑤ USE TIN/LEAD PLATED SOLDER TAILS.
- ⑥ USE 100% MATTE TIN PLATED SOLDER TAILS
- ⑦ PRODUCT DESCRIPTION CODE:

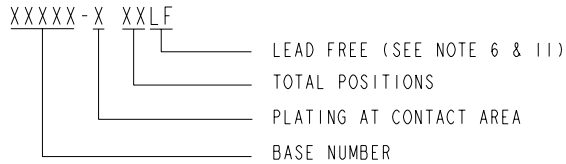

- ⑧ PACKAGING:
  - (a) XXXXX-XXX ---STD PACKAGING IN TUBE.
  - (b) XXXXX-XXXTR ---TAPE AND REEL PACKAGING WITH PICK-UP CAP. (FIG 1)
  - (c) XXXXX-XXXTRN ---TAPE AND REEL PACKAGING WITHOUT PICK-UP CAP.
- 9. CO-PLANARITY:
  - FROM POSITION - X04 THRU -X38 : 0.10 / .004
  - X40 THRU -X50 : 0.12 / .005

△ 10. PRODUCT SPECIFICATION: GS-12-008

11. THE HOUSING WILL WITHSTAND EXPOSURE TO 255°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

② THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

△ 13. A △ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

**CONFIDENTIAL**

	title	LPVCC	dwg no	55510	Rev.	G
	catalog no	4.5 TOP ENTRY SMT ASSY	-	CUSTOMER	sheet 3 of 3	

REV E - 2006-03-28