

TECHNICAL CHARACTERISTICS

MATERIAL  
 INSULATOR: NYLON 9T  
 FLAMABILITY RATING: UL94-V0  
 COLOR: BEIGE  
 CONTACT MATERIAL: COPPER ALLOY  
 CONTACT TYPE: STAMPED  
 CONTACT PLATING: TIN  
 QUALITY CLASS: 25 MATING CYCLES  
 PITCH: 2.00MM

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -25 UP TO 85°C  
 COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL  
 CURRENT RATING: 2A  
 WORKING VOLTAGE: 125V AC  
 INSULATOR RESISTANCE: >1000 MOHM  
 DIELECTRIC WITHSTANDING VOLTAGE: 800V AC/MN  
 CONTACT RESISTANCE: 20 mOHM MAX

SOLDERING  
 REFLOW PROCESS

PACKAGING  
 TAPE AND REEL

DIMENSION  
 A = 2.00 x (NB PIN - 1)  
 B = 2.00 x (NB PIN - 1) + 5.90

G				PROJECTION: 	GENERAL TOLERANCE .X = +/-.0.2 .XX = +/-.0.15		DESCRIPTION: 2.00 SMT MALE VERTICAL SHROUDED HEADER	SIZE <b>A4</b>	
F			APPROVAL: RJ						UNIT: MM
E									SCALE:
D									SHEET: 1/2
C	28-JAN-09	B DIMENSION	JP				WERI PART NO: 6203 xx 124022		
B	07-NOV-08	DIMENSION B	CH						
A	23-JUN-08	PDF	CH						
REV	DATE	FILE	BY		DRAW:				

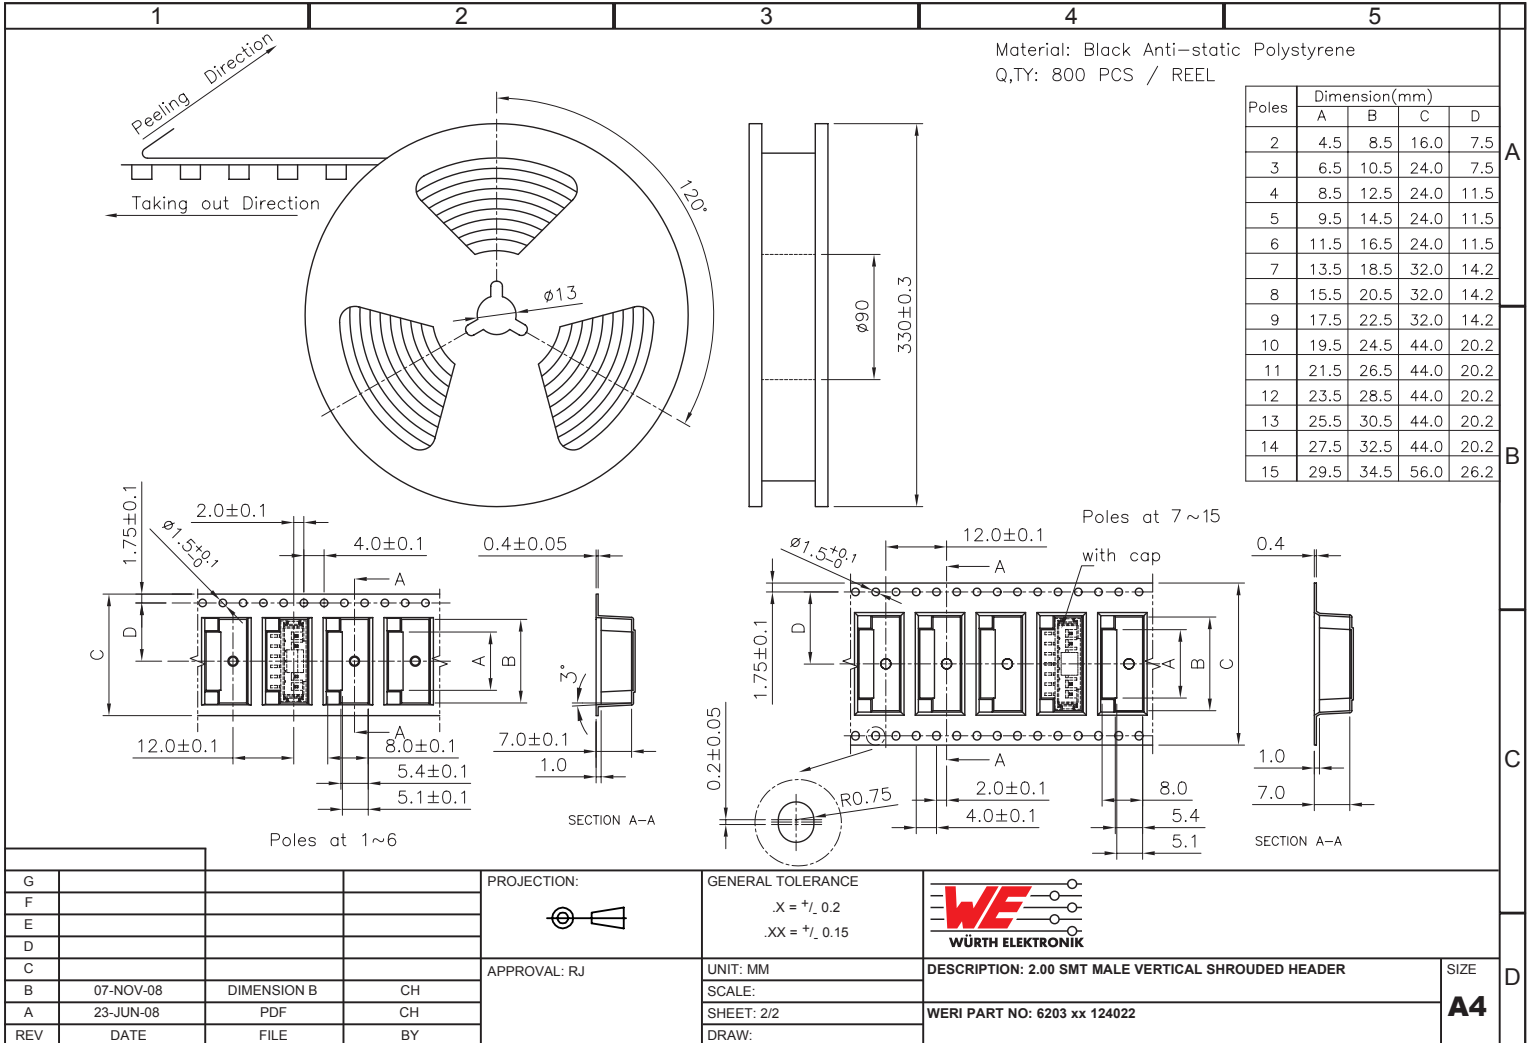

G				PROJECTION:	GENERAL TOLERANCE		DESCRIPTION: 2.00 SMT MALE VERTICAL SHROUDED HEADER WERI PART NO: 6203 xx 124022	SIZE <b>A4</b>
F					.X = +/- 0.2			
E					.XX = +/- 0.15			
D								
C				APPROVAL: RJ	UNIT: MM			
B	07-NOV-08	DIMENSION B	CH		SCALE:			
A	23-JUN-08	PDF	CH		SHEET: 2/2			
REV	DATE	FILE	BY		DRAW:			