

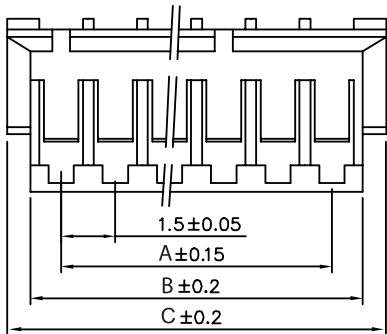


1 2 3 4 5

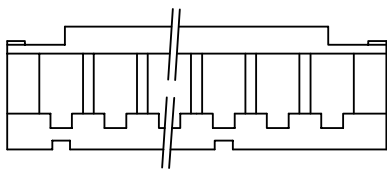

TECHNICAL CHARACTERISTICS

MATERIAL  
INSULATOR: NYLON 66  
COLOR: GREY  
PITCH: 1.50MM

ENVIRONMENTAL  
OPERATING TEMPERATURE: -25 UP TO 85°C  
FLAMABILITY RATING: UL94-V0  
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
CURRENT RATING: 1A  
WORKING VOLTAGE: 50V AC  
INSULATOR RESISTANCE: >1000 MOHM  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN

PACKAGING  
BAG

DIMENSION  
A = 1.50 x (NB. PIN - 1)  
B = 1.50 x (NB PIN) + 0.30  
C = 1.50 x (NB PIN + 1) - 0.40

A

B

C

RoHS Compliant

G			
F			
E			
D			
C	01-FEB-07	DRAW	EC
B	31-MAR-04	LEAD FREE	JP
A	04-SEP-98	PDF	JP
REV	DATE	FILE	BY

PROJECTION:	
APPROVAL: RJ	

GENERAL TOLERANCE
.X = +/- 0.2
.XX = +/- 0.15
UNIT: MM
SCALE:
SHEET: 1/1
DRAW: PEARL

**WÜRTH ELEKTRONIK**

DESCRIPTION: 1.50MM FEMALE TERMINAL HOUSING
WERI PART NO: 6480 xx 113322

SIZE
<b>A4</b>

D