



THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK
00				
01		REVISED PER EDD-11-004820	11MMR11	RK HMR

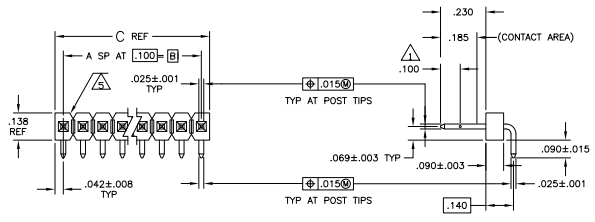

- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 3. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- △ BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- △ .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL
- △ HIGH TEMPERATURE CONFIGURATION
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	DATE	DESCRIPTION	BY	CHK	
△	3.984	3.900	39	40	9-103765-0
△	3.484	3.400	34	36	8 - 5
△	2.984	2.900	29	30	8 - 0
△	2.484	2.400	24	26	7 - 6
△	1.984	1.900	19	20	7 - 0
△	1.484	1.400	14	16	6 - 5
△	1.384	1.300	13	14	6 - 4
△	1.284	1.200	12	13	6 - 3
△	1.184	1.100	11	12	6 - 2
△	1.084	1.000	10	11	6 - 1
△	.984	.900	9	10	6 - 0
△	.884	.800	8	9	5 - 9
△	.784	.700	7	8	5 - 8
△	.684	.600	6	7	5 - 7
△	.584	.500	5	6	5 - 6
△	.484	.400	4	5	5 - 5
△	.384	.300	3	4	5 - 4
△	.284	.200	2	3	5 - 3
△	.184	.100	1	2	5 - 2
△	.084	.000	0	1	5 - 1
△	3.984	3.900	39	40	4-103765-0
△	3.884	3.800	38	39	3 - 9
△	3.784	3.700	37	38	3 - 8
△	3.684	3.600	36	37	3 - 7
△	3.584	3.500	35	36	3 - 6
△	3.484	3.400	34	35	3 - 5
△	3.284	3.300	33	34	3 - 4
△	3.284	3.200	32	33	3 - 3
△	3.184	3.100	31	32	3 - 2
△	3.084	3.000	30	31	3 - 1
△	2.984	2.900	29	30	3 - 0
△	2.884	2.800	28	29	2 - 9
△	2.784	2.700	27	28	2 - 8
△	2.684	2.600	26	27	2 - 7
△	2.584	2.500	25	26	2 - 6
△	2.484	2.400	24	25	2 - 5
△	2.384	2.300	23	24	2 - 4
△	2.284	2.200	22	23	2 - 3
△	2.184	2.100	21	22	2 - 2
△	2.084	2.000	20	21	2 - 1
△	1.984	1.900	19	20	2 - 0
△	1.884	1.800	18	19	1 - 9
△	1.784	1.700	17	18	1 - 8
△	1.684	1.600	16	17	1 - 7
△	1.584	1.500	15	16	1 - 6
△	1.484	1.400	14	15	1 - 5
△	1.384	1.300	13	14	1 - 4
△	1.284	1.200	12	13	1 - 3
△	1.184	1.100	11	12	1 - 2
△	1.084	1.000	10	11	1 - 1
△	.984	.900	9	10	1 - 0
△	.884	.800	8	9	0 - 9
△	.784	.700	7	8	0 - 8
△	.684	.600	6	7	0 - 7
△	.584	.500	5	6	0 - 6
△	.484	.400	4	5	0 - 5
△	.384	.300	3	4	0 - 4
△	.284	.200	2	3	0 - 3
△	.184	.100	1	2	0 - 2
△	.084	.000	0	1	0 - 1

REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. BY: D. SINISI, CHECKED: J. BUCKLER, DRAWN: J. BUCKLER, DATE: 11/11/00

TE Connectivity

ASSEMBLY, MOD II, HEADER, BREAKAWAY, SINGLE ROW, RIGHT ANGLE, 100, WITH .025 SQUARE POSTS

SIZE: A1, DATE: 11/11/00, DRAWING NO: 100779, REV: 1, SHEET: 1 OF 1, PART NO: 103765-0