


Power Line Inductor

AIRD-06



RoHS
Compliant



21.0 x φ21.0 mm

FEATURES:

- Ferrite core with UL tube
- Wire wound construction
- High current, low DCR

APPLICATIONS:

- Electronic Appliance
- Power Supplies
- TRIAC/SCR Control Circuits

STANDARD SPECIFICATIONS

Operating Temperature: -25°C~ +85°C

Storage Temperature: -25°C~ +125°C

| Part Number | Inductance | Tolerance | Q min | DCR (Max) | Saturation Current (Max) | Temperature Rise Current (Max) | Inductance Code |
|-------------|------------|-----------|-------|-----------|--------------------------|--------------------------------|-----------------|
| Units | μH | % | | Ω | A | A | |
| Symbol | L | K, M | | DCR | Isat | Irms | |
| AIRD-06-1R0 | 1.0 | M | 15 | 0.003 | 108 | 11.4 | 1R0M |
| AIRD-06-1R2 | 1.2 | M | 15 | 0.003 | 108 | 11.4 | 1R0M |
| AIRD-06-1R5 | 1.5 | M | 15 | 0.003 | 83 | 11.4 | 1R5M |
| AIRD-06-1R8 | 1.8 | M | 15 | 0.003 | 68 | 11.4 | 1R8M |
| AIRD-06-2R2 | 2.2 | M | 15 | 0.004 | 68 | 11.4 | 2R2M |
| AIRD-06-2R7 | 2.7 | M | 15 | 0.005 | 58 | 11.4 | 2R7M |
| AIRD-06-3R3 | 3.3 | M | 15 | 0.005 | 58 | 11.4 | 3R3M |
| AIRD-06-3R9 | 3.9 | M | 15 | 0.005 | 50 | 11.4 | 3R9M |
| AIRD-06-4R7 | 4.7 | M | 15 | 0.005 | 50 | 11.4 | 4R7M |
| AIRD-06-5R6 | 5.6 | M | 15 | 0.006 | 44 | 11.4 | 5R6M |
| AIRD-06-6R8 | 6.8 | M | 15 | 0.007 | 39 | 11.4 | 6R8M |
| AIRD-06-8R2 | 8.2 | M | 15 | 0.007 | 36 | 11.4 | 8R2M |
| AIRD-06-100 | 10 | K | 15 | 0.009 | 30 | 11.4 | 100K |
| AIRD-06-120 | 12 | K | 15 | 0.009 | 27 | 11.4 | 120K |
| AIRD-06-150 | 15 | K | 15 | 0.013 | 25 | 9.0 | 150K |
| AIRD-06-180 | 18 | K | 15 | 0.018 | 22 | 7.2 | 180K |
| AIRD-06-220 | 22 | K | 15 | 0.019 | 21 | 7.2 | 220K |
| AIRD-06-270 | 27 | K | 15 | 0.026 | 20.5 | 5.5 | 270K |
| AIRD-06-330 | 33 | K | 15 | 0.029 | 18.6 | 5.5 | 330K |
| AIRD-06-390 | 39 | K | 15 | 0.030 | 17.0 | 5.5 | 390K |
| AIRD-06-470 | 47 | K | 15 | 0.035 | 15.1 | 5.5 | 470K |
| AIRD-06-560 | 56 | K | 15 | 0.039 | 13.6 | 5.5 | 560K |
| AIRD-06-680 | 68 | K | 15 | 0.053 | 12.7 | 4.8 | 680K |
| AIRD-06-820 | 82 | K | 15 | 0.060 | 11.3 | 4.8 | 820K |
| AIRD-06-101 | 100 | K | 15 | 0.080 | 10.4 | 4.0 | 101K |
| AIRD-06-121 | 120 | K | 15 | 0.090 | 9.4 | 4.0 | 121K |
| AIRD-06-151 | 150 | K | 15 | 0.098 | 8.6 | 4.0 | 151K |
| AIRD-06-181 | 180 | K | 15 | 0.110 | 7.8 | 4.0 | 181K |
| AIRD-06-221 | 220 | K | 15 | 0.150 | 7.0 | 2.8 | 221K |
| AIRD-06-271 | 270 | K | 15 | 0.213 | 6.3 | 2.0 | 271K |
| AIRD-06-331 | 330 | K | 15 | 0.305 | 5.2 | 1.6 | 331K |
| AIRD-06-391 | 390 | K | 15 | 0.320 | 4.9 | 1.6 | 391K |
| AIRD-06-471 | 470 | K | 15 | 0.355 | 4.5 | 1.6 | 471K |
| AIRD-06-561 | 560 | K | 15 | 0.388 | 4.1 | 1.6 | 561K |
| AIRD-06-681 | 680 | K | 15 | 0.430 | 3.7 | 1.6 | 681K |
| AIRD-06-821 | 820 | K | 15 | 0.590 | 3.4 | 1.3 | 821K |
| AIRD-06-102 | 1000 | K | 15 | 0.818 | 3.1 | 1.0 | 102K |
| AIRD-06-122 | 1200 | K | 15 | 1.140 | 2.7 | 0.8 | 122K |
| AIRD-06-152 | 1500 | K | 15 | 1.260 | 2.4 | 0.8 | 152K |
| AIRD-06-182 | 1800 | K | 15 | 1.390 | 2.2 | 0.8 | 182K |
| AIRD-06-222 | 2200 | K | 15 | 1.540 | 2.0 | 0.8 | 222K |

Test Conditions and equipments

L test frequency: 1kHz, 0.1Vrms

Q test frequency: 50kHz, 0.1Vrms

DCR: QuadTech Milliohmeter

Isat: 10% inductance drops from initial value

ABRACON IS
ISO 9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale **Revised: 07.31.12**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Power Line Inductor

AIRD-06



RoHS
Compliant



21.0 x ϕ 21.0 mm

PART NUMBER IDENTIFICATION

AIRD-06-

Inductance Code


Please refer to the
Electrical Spec Table

Tolerance

| |
|-----------------|
| M: $\pm 20\%^*$ |
| K: $\pm 10\%^*$ |

*1.0 ~ 8.2 μ H: M only
10 ~ 2,200 μ H: K only

OUTLINE DIMENSION:

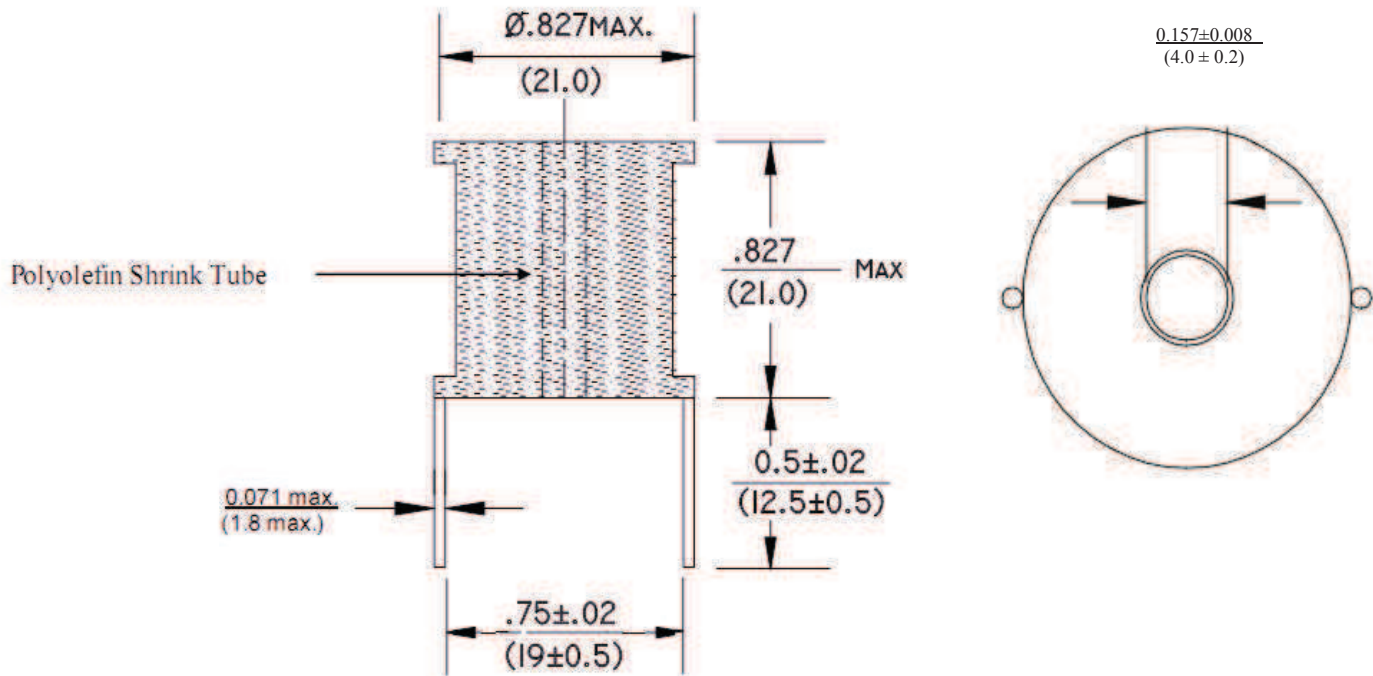

Dimension: inch (mm)

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale **Revised: 07.31.12**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com