


REV.	DATE	DESCRIPTION
NC	03/02/00	INITIAL RELEASE

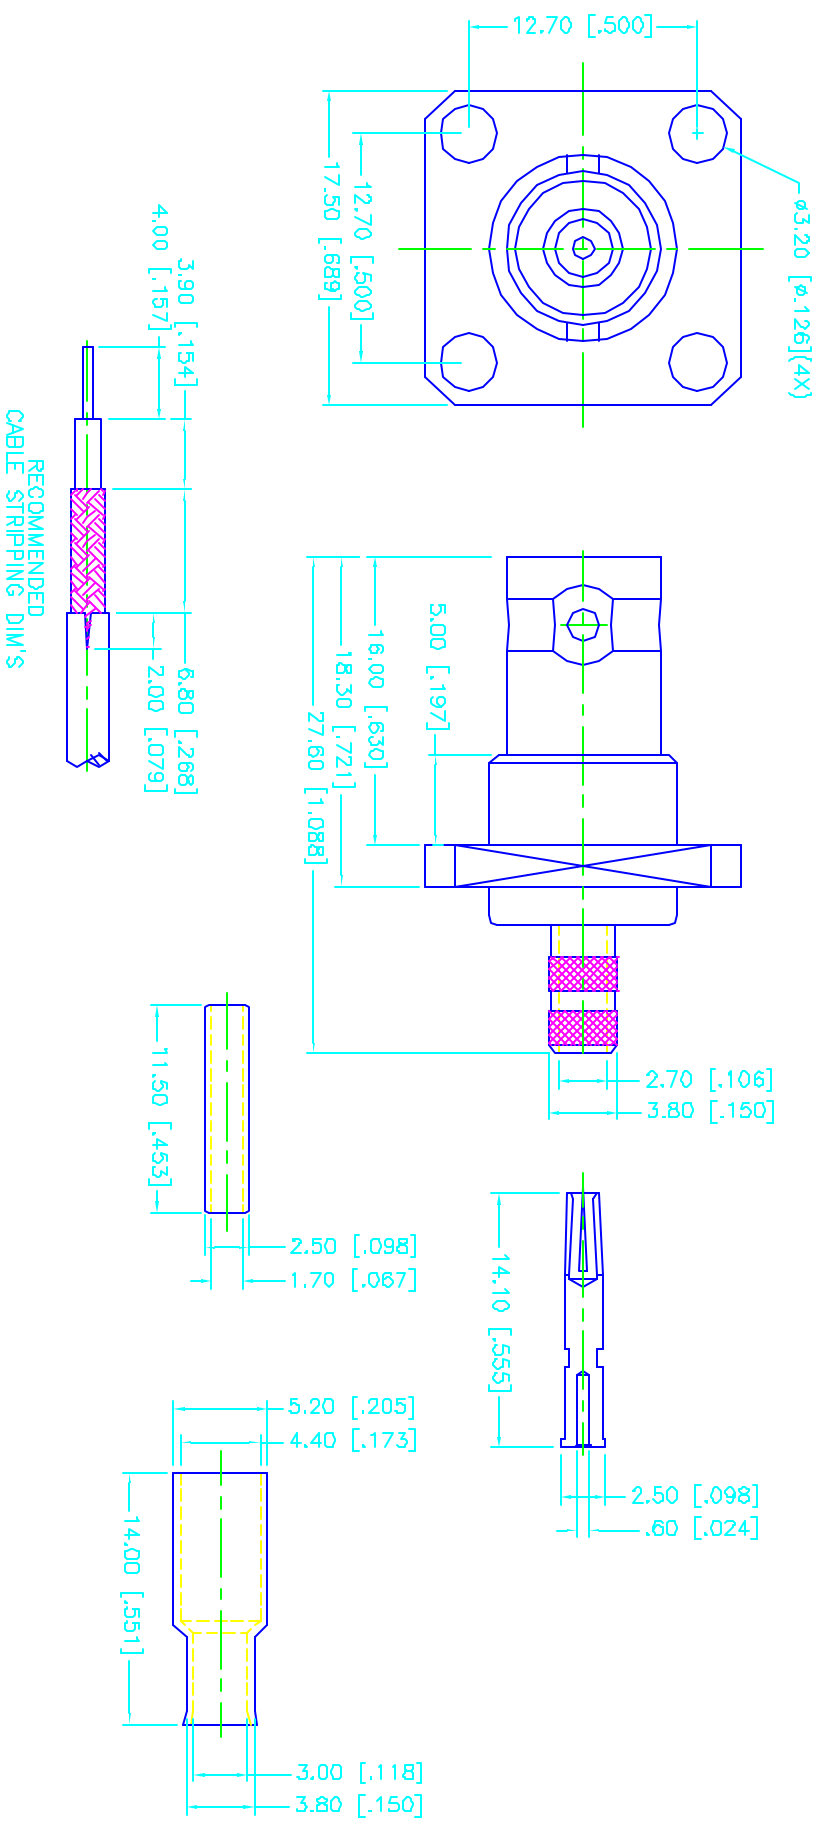

RECOMMENDED
CABLE STRIPPING DIM'S

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	APPROVALS	DATE	TITLE	SCALE	PART NO.	SHEET
1 BODY	BRASS	NICKEL		DRAWN	03/02/00	Comnetex Connector Corporation BNC PANEL CRIMP JACK (FOR RG-174/U, 188A/U, 316/U CABLE)	NA	112288	1 OF 1
2 INSULATOR	TEFLON	NATURAL		CHECKED					
3 CONTACT PIN	PHOS. BRONZE	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED					
4 SLEEVE	DELFIN	NATURAL							
5 FERRULE	BRASS	NICKEL							
6									
7									
8			DO NOT SCALE DRAWING						