


NOTES:
1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATING
CONTACT - BERYLLIUM COPPER, SILVER PLATING
INSULATOR - PTFE

2. ELECTRICAL:
A. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.


3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C

4. PACKAGING:
A. QUANTITY: SINGLE PACK IN BAG
B. MARKING: BAG TO BE MARKED
"AMPHENOLRF, 27075 AND DATE CODE"
C. CONTACT, BRAID CRIMP, GASKET AND
CRIMP NUT ARE PACKAGED LOOSE.


► SHOWS CABLE ENTRY DIMENSION.




**RECOMMENDED
CABLE STRIPPING DIMENSIONS**

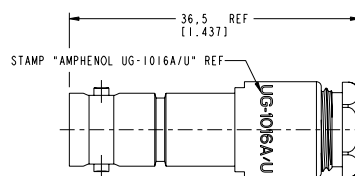

AFTER ASSEMBLING



SCALE 2.000

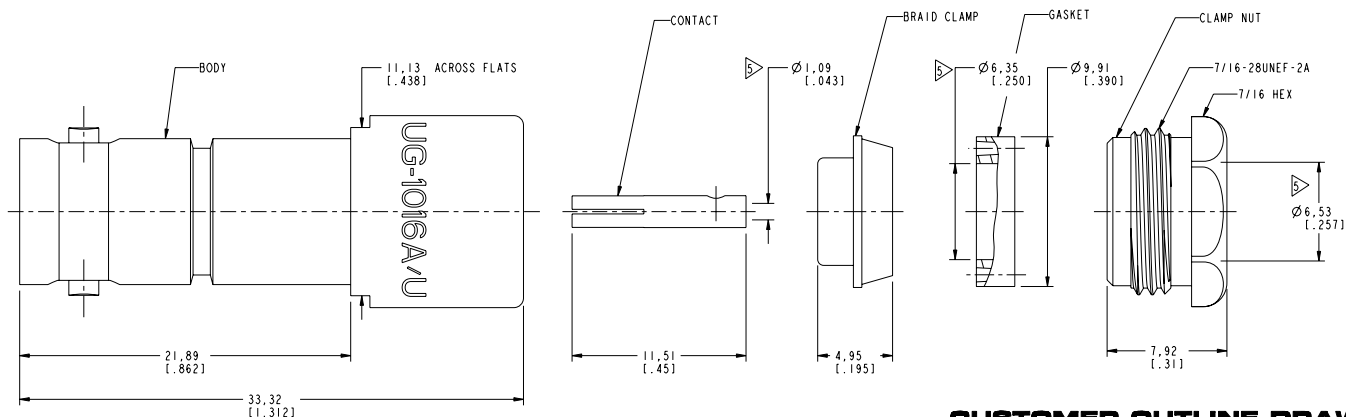

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ±0.05mm ±0.1mm ±0.2mm ±0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL		DRAWN I.XU	DATE 13-Mar-12	TITLE MHV STRAIGHT JACK FOR RG59/U,62/U CABLE	Amphenol RF Danbury CT USA, Taiwan, Taiwan, Shenzhen, China www.amphenolrf.com	
	REFERENCE EAR # AND		ENGINEER K.CAPOZZI	DATE 13-Mar-12			
	CONFIGURATION LEVEL: □□□□		APPROVED S.HSIEH	DATE 16-Mar-12	SCALE: 4.0:1.0 SHEET 2 OF 2		
	FINISH		CAD FILE		DWG SIZE B		REV J
						DRAWING NO. 27075	
						ITEM NO. 27075	
						PART NO. 27075	