

RF AMPLIFIER

MODEL *TM9511*

Available as: TM9511, 4 Pin TO-8 (T4)
 TN9511, 4 Pin Surface Mount (SM3)
 FP9511, 4 Pin Flatpack (FP4)
 BX9511, Connectrized Housing (H1)
 PN9511, Reduced Size Surface Mount (SM11)

Features

- Low Noise Figure: <2.3 dB Typical
- High Gain: +16.5 dB Typical
- Operating Temp. -55 °C to +85 °C
- Environmental Screening Available

Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +21(Typ.)
 Second Order Two Tone Intercept Point +16(Typ.)
 Third Order Two Tone Intercept Point +14(Typ.)

Specifications


CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 1000 MHz	5 - 1000 MHz
Gain (dB)	16.5	15.0 Min.
Power @ 1 dB Comp. (dBm)	+1	- 1 Min.
Reverse Isolation (dB)	- 18.5	- 18 Max.
VSWR In	<1.5:1	2.0:1 Max.
Out	<1.5:1	2.0:1 Max.
Noise figure (dB)	2.3	3.0 Max.
Power Vdc	+15	+15
mA	9.5	11 Max.

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts
 (1 Minute Max.)
 Maximum Peak Power.....0.5 Watt
 (3 µsec Max.)

Note: Care should always be taken to effectively ground the case of each unit.

Typical Performance Data

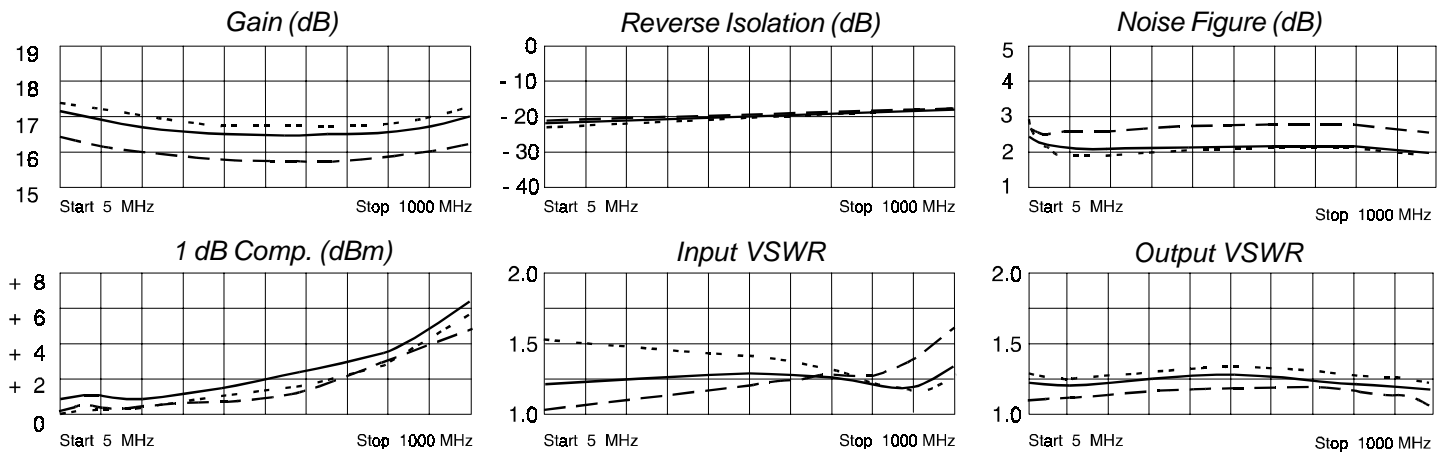

Legend ——— + 25 °C - - - + 85 °C ····· -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.11	-173	7.19	-177	.09	4	.10	-172
50	.11	173	7.04	172	.09	- 0	.09	159
100	.11	163	6.99	164	.09	- 2	.09	140
200	.11	145	6.89	149	.09	- 3	.10	109
400	.10	115	6.69	120	.10	- 8	.12	63
600	.10	88	6.62	91	.10	-13	.12	29
800	.08	60	6.76	61	.11	-21	.10	9
1000	.02	23	7.14	26	.12	-29	.11	- 4



2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 •••• FAX 215-464-4001 04/01/03