


## Dual Boost chopper NPT IGBT Power Module

$V_{CES} = 1200V$   
 $I_C = 50A @ T_c = 80^\circ C$

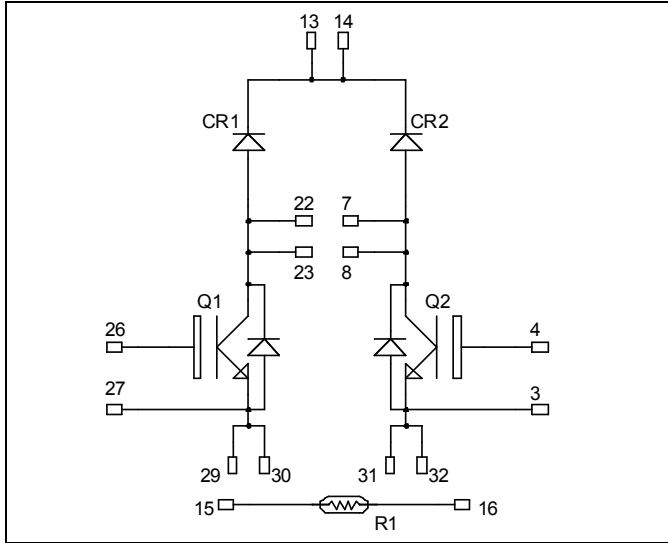


### Application

- AC and DC motor control
- Switched Mode Power Supplies

### Features

- Non Punch Through (NPT) Fast IGBT
  - Low voltage drop
  - Low tail current
  - Switching frequency up to 50 kHz
  - Soft recovery parallel diodes
  - Low diode VF
  - Low leakage current
  - RBSOA and SCSOA rated
  - Symmetrical design
- Kelvin emitter for easy drive
- Very low stray inductance
- High level of integration
- Internal thermistor for temperature monitoring

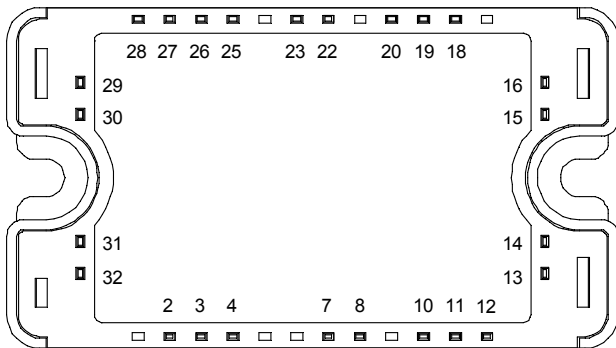

### Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Solderable terminals both for power and signal for easy PCB mounting
- Low profile
- Easy paralleling due to positive TC of VCEsat
- Each leg can be easily paralleled to achieve a single buck of twice the current capability
- RoHS compliant

All multiple inputs and outputs must be shorted together  
 Example: 13/14 ; 29/30 ; 22/23 ...

### Absolute maximum ratings

| Symbol    | Parameter                             | Max ratings         | Unit         |
|-----------|---------------------------------------|---------------------|--------------|
| $V_{CES}$ | Collector - Emitter Breakdown Voltage | 1200                | V            |
| $I_C$     | Continuous Collector Current          | $T_c = 25^\circ C$  | 70           |
|           |                                       | $T_c = 80^\circ C$  | 50           |
| $I_{CM}$  | Pulsed Collector Current              | $T_c = 25^\circ C$  | 150          |
| $V_{GE}$  | Gate - Emitter Voltage                | $\pm 20$            | V            |
| $P_D$     | Maximum Power Dissipation             | $T_c = 25^\circ C$  | 312          |
| RBSOA     | Reverse Bias Safe Operating Area      | $T_j = 150^\circ C$ | 100A @ 1200V |

**CAUTION:** These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed. See application note APT0502 on [www.microsemi.com](http://www.microsemi.com)

All ratings @  $T_j = 25^\circ\text{C}$  unless otherwise specified

**Electrical Characteristics**

| Symbol        | Characteristic                       | Test Conditions                                 | Min                       | Typ | Max | Unit          |
|---------------|--------------------------------------|---|---------------------------|-----|-----|---------------|
| $I_{CES}$     | Zero Gate Voltage Collector Current  | $V_{GE} = 0\text{V}$<br>$V_{CE} = 1200\text{V}$ | $T_j = 25^\circ\text{C}$  |     | 250 | $\mu\text{A}$ |
|               |                                      |   | $T_j = 125^\circ\text{C}$ |     | 500 |               |
| $V_{CE(sat)}$ | Collector Emitter saturation Voltage | $V_{GE} = 15\text{V}$<br>$I_C = 50\text{A}$     | $T_j = 25^\circ\text{C}$  | 3.2 | 3.7 | V             |
|               |                                      |   | $T_j = 125^\circ\text{C}$ | 4.0 |     |               |
| $V_{GE(th)}$  | Gate Threshold Voltage               | $V_{GE} = V_{CE2}$ , $I_C = 1\text{mA}$         | 4.5                       |     | 6.5 | V             |
| $I_{GES}$     | Gate – Emitter Leakage Current       | $V_{GE} = 20\text{V}$ , $V_{CE} = 0\text{V}$    |                           |     | 100 | nA            |

**Dynamic Characteristics**

| Symbol       | Characteristic               | Test Conditions  | Min                       | Typ  | Max  | Unit |
|--------------|------------------------------|--|---------------------------|------|------|------|
| $C_{ies}$    | Input Capacitance            | $V_{GE} = 0\text{V}$<br>$V_{CE} = 25\text{V}$<br>$f = 1\text{MHz}$   |                           | 3450 |      | pF   |
| $C_{oes}$    | Output Capacitance           |  |                           | 330  |      |      |
| $C_{res}$    | Reverse Transfer Capacitance |  |                           | 220  |      |      |
| $Q_g$        | Total gate Charge            | $V_{GS} = 15\text{V}$<br>$V_{Bus} = 600\text{V}$<br>$I_C = 50\text{A}$   |                           | 330  |      | nC   |
| $Q_{ge}$     | Gate – Emitter Charge        |  |                           | 35   |      |      |
| $Q_{gc}$     | Gate – Collector Charge      |  |                           | 200  |      |      |
| $T_{d(on)}$  | Turn-on Delay Time           | Inductive Switching ( $25^\circ\text{C}$ )<br>$V_{GE} = 15\text{V}$<br>$V_{Bus} = 600\text{V}$<br>$I_C = 50\text{A}$<br>$R_G = 5\ \Omega$      |                           | 35   |      | ns   |
| $T_r$        | Rise Time                    |  |                           | 65   |      |      |
| $T_{d(off)}$ | Turn-off Delay Time          |  |                           | 320  |      |      |
| $T_f$        | Fall Time                    |  |                           | 30   |      |      |
| $T_{d(on)}$  | Turn-on Delay Time           | Inductive Switching ( $125^\circ\text{C}$ )<br>$V_{GE} = \pm 15\text{V}$<br>$V_{Bus} = 600\text{V}$<br>$I_C = 50\text{A}$<br>$R_G = 5\ \Omega$ |                           | 35   |      | ns   |
| $T_r$        | Rise Time                    |  |                           | 65   |      |      |
| $T_{d(off)}$ | Turn-off Delay Time          |  |                           | 360  |      |      |
| $T_f$        | Fall Time                    |  |                           | 40   |      |      |
| $E_{on}$     | Turn-on Switching Energy     | $V_{GE} = \pm 15\text{V}$<br>$V_{Bus} = 600\text{V}$<br>$I_C = 50\text{A}$<br>$R_G = 5\ \Omega$  | $T_j = 125^\circ\text{C}$ |      | 6.9  | mJ   |
| $E_{off}$    | Turn-off Switching Energy    |  |                           |      | 3.05 |      |
| $I_{sc}$     | Short Circuit data           | $V_{GE} \leq 15\text{V}$ ; $V_{Bus} = 900\text{V}$<br>$t_p \leq 10\ \mu\text{s}$ ; $T_j = 125^\circ\text{C}$                                   |                           | 300  |      | A    |

**Chopper diode ratings and characteristics**

| Symbol    | Characteristic                          | Test Conditions  | Min                       | Typ  | Max | Unit          |
|-----------|---|--|---------------------------|------|-----|---------------|
| $V_{RRM}$ | Maximum Peak Repetitive Reverse Voltage |  | 1200                      |      |     | V             |
| $I_{RM}$  | Maximum Reverse Leakage Current         | $V_R = 1200\text{V}$   | $T_j = 25^\circ\text{C}$  |      | 100 | $\mu\text{A}$ |
|           |   |  | $T_j = 125^\circ\text{C}$ |      | 500 |               |
| $I_F$     | DC Forward Current                      | $T_c = 80^\circ\text{C}$   |                           | 60   |     | A             |
| $V_F$     | Diode Forward Voltage                   | $I_F = 60\text{A}$   |                           | 2.5  | 3   | V             |
|           |   | $I_F = 120\text{A}$  |                           | 3    |     |               |
|           |   | $I_F = 60\text{A}$   | $T_j = 125^\circ\text{C}$ | 1.8  |     |               |
| $t_{rr}$  | Reverse Recovery Time                   | $I_F = 60\text{A}$<br>$V_R = 800\text{V}$<br>$di/dt = 200\text{A}/\mu\text{s}$ | $T_j = 25^\circ\text{C}$  | 265  |     | ns            |
|           |   |  | $T_j = 125^\circ\text{C}$ | 350  |     |               |
| $Q_{rr}$  | Reverse Recovery Charge                 | $I_F = 60\text{A}$<br>$V_R = 800\text{V}$<br>$di/dt = 200\text{A}/\mu\text{s}$ | $T_j = 25^\circ\text{C}$  | 560  |     | nC            |
|           |   |  | $T_j = 125^\circ\text{C}$ | 2890 |     |               |

## Thermal and package characteristics

| Symbol            | Characteristic   | Min         | Typ | Max | Unit |     |
|-------------------|--|-------------|-----|-----|------|-----|
| R <sub>thJC</sub> | Junction to Case Thermal Resistance  | IGBT        |     | 0.4 | °C/W |     |
|                   |  | Diode       |     | 0.9 |      |     |
| V <sub>ISOL</sub> | RMS Isolation Voltage, any terminal to case t=1 min, I <sub>isol</sub> <1mA, 50/60Hz | 2500        |     |     | V    |     |
| T <sub>J</sub>    | Operating junction temperature range   | -40         |     | 150 | °C   |     |
| T <sub>STG</sub>  | Storage Temperature Range  | -40         |     | 125 |      |     |
| T <sub>C</sub>    | Operating Case Temperature   | -40         |     | 100 |      |     |
| Torque            | Mounting torque  | To heatsink | M4  | 2.5 | 4.7  | N.m |
| Wt                | Package Weight   |             |     |     | 110  | g   |


## Temperature sensor NTC (see application note APT0406 on www.microsemi.com for more information).

| Symbol                            | Characteristic             | Min | Typ  | Max | Unit |
|-----------------------------------|----------------------------|-----|------|-----|------|
| R <sub>25</sub>                   | Resistance @ 25°C          |     | 50   |     | kΩ   |
| ΔR <sub>25</sub> /R <sub>25</sub> |                            |     | 5    |     | %    |
| B <sub>25/85</sub>                | T <sub>25</sub> = 298.15 K |     | 3952 |     | K    |
| ΔB/B                              | T <sub>C</sub> = 100°C     |     | 4    |     | %    |

$$R_T = \frac{R_{25}}{\exp \left[ B_{25/85} \left( \frac{1}{T_{25}} - \frac{1}{T} \right) \right]}$$







T: Thermistor temperature  
 R<sub>T</sub>: Thermistor value at T









## SP3 Package outline (dimensions in mm)




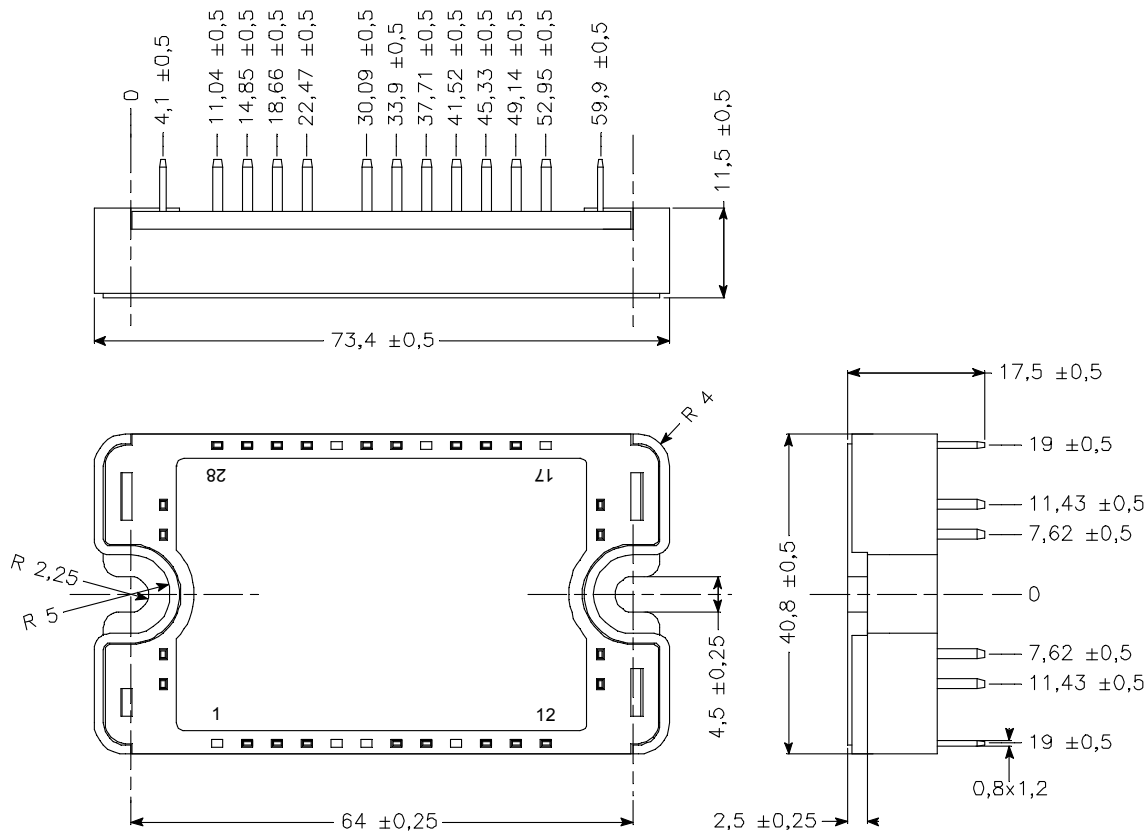


See application note 1901 - Mounting Instructions for SP3 Power Modules on [www.microsemi.com](http://www.microsemi.com)


## Typical IGBT Performance Curve

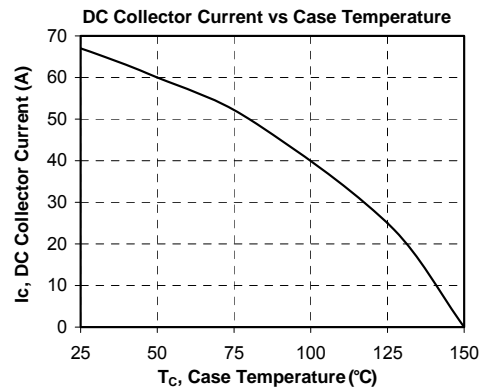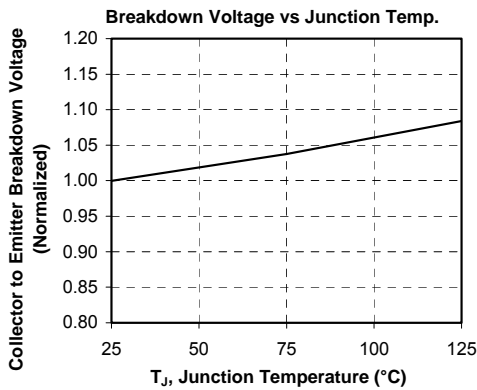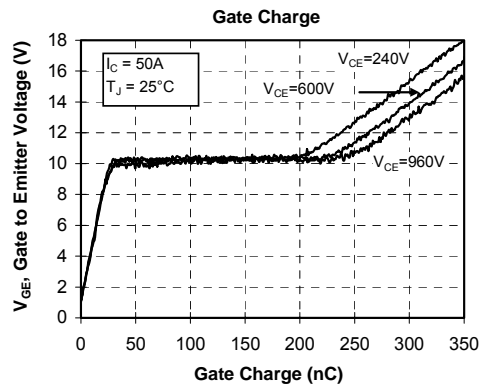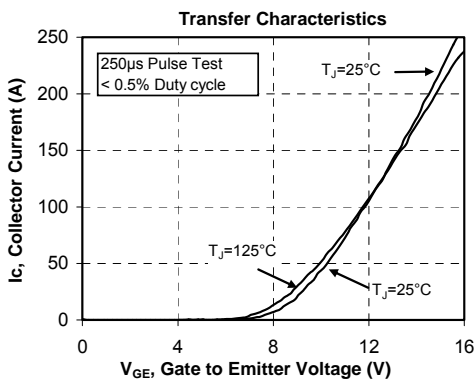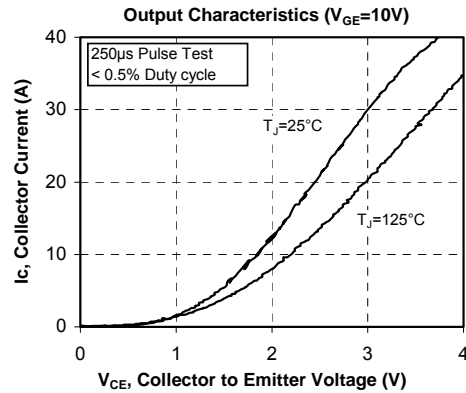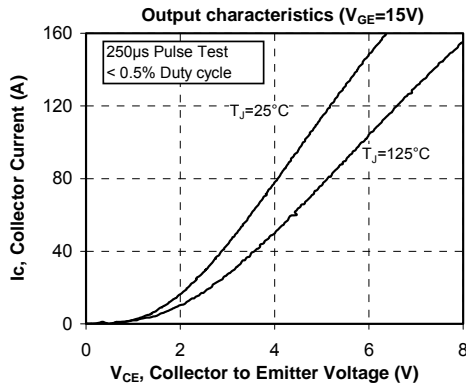

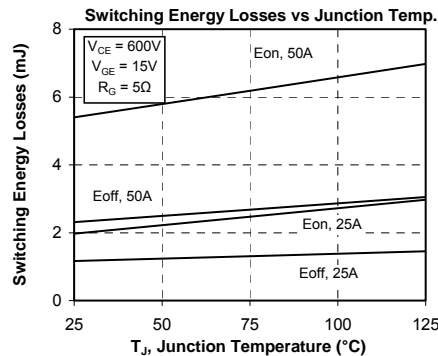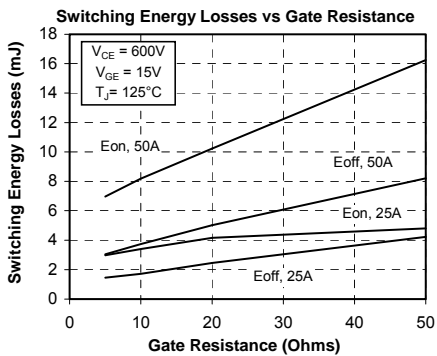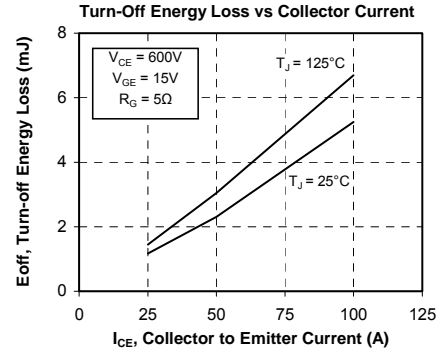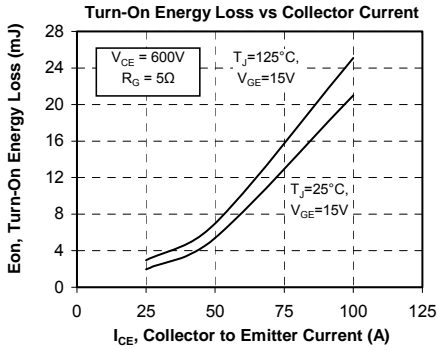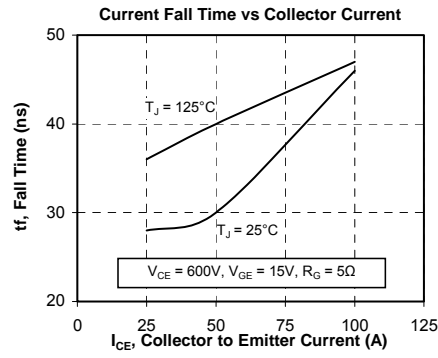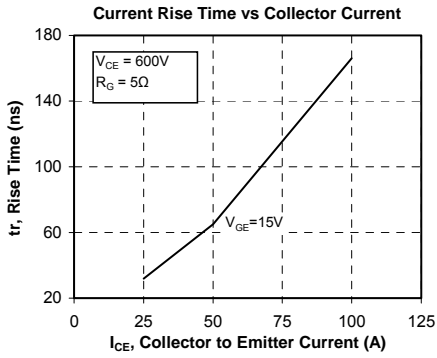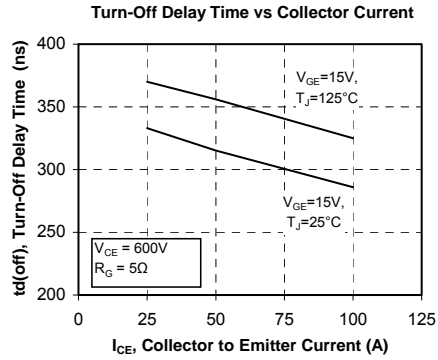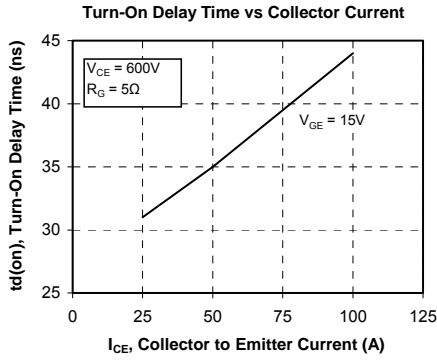

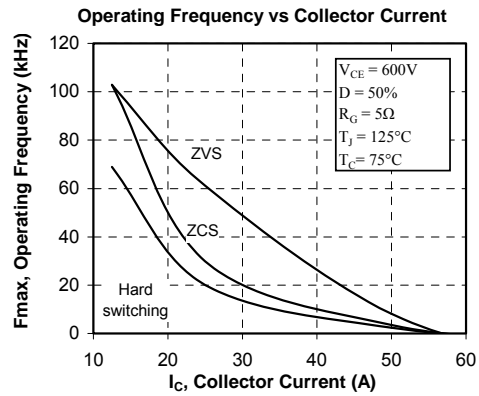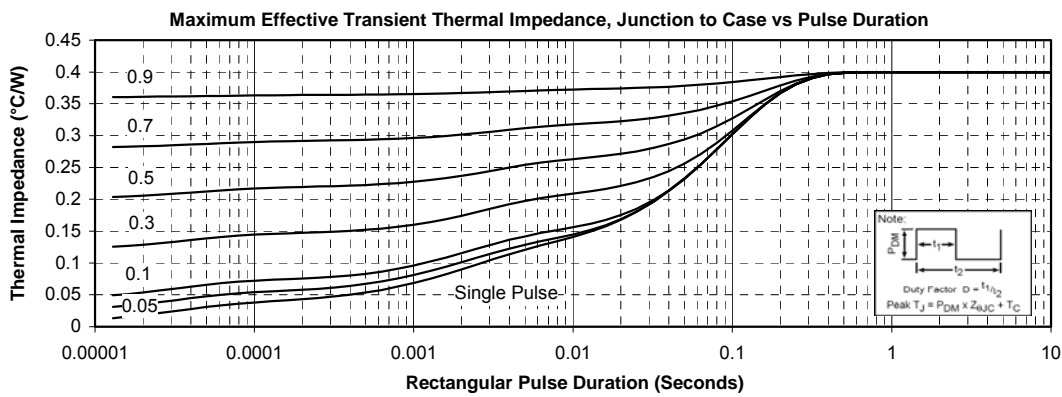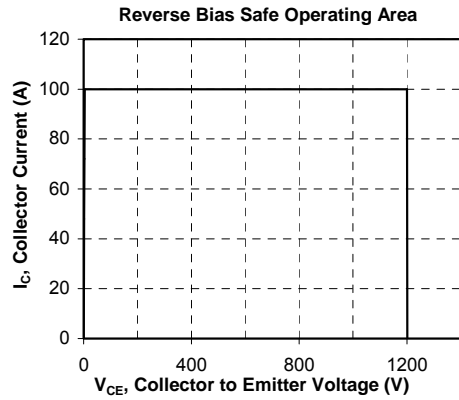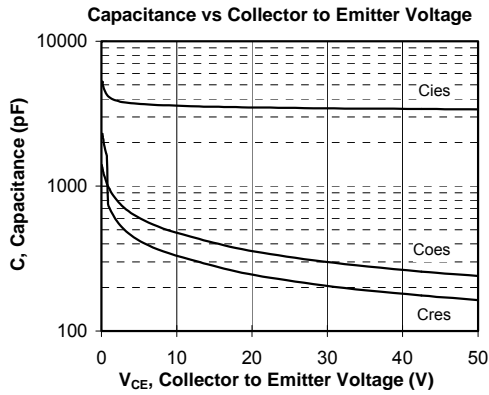

## Typical diode Performance Curve

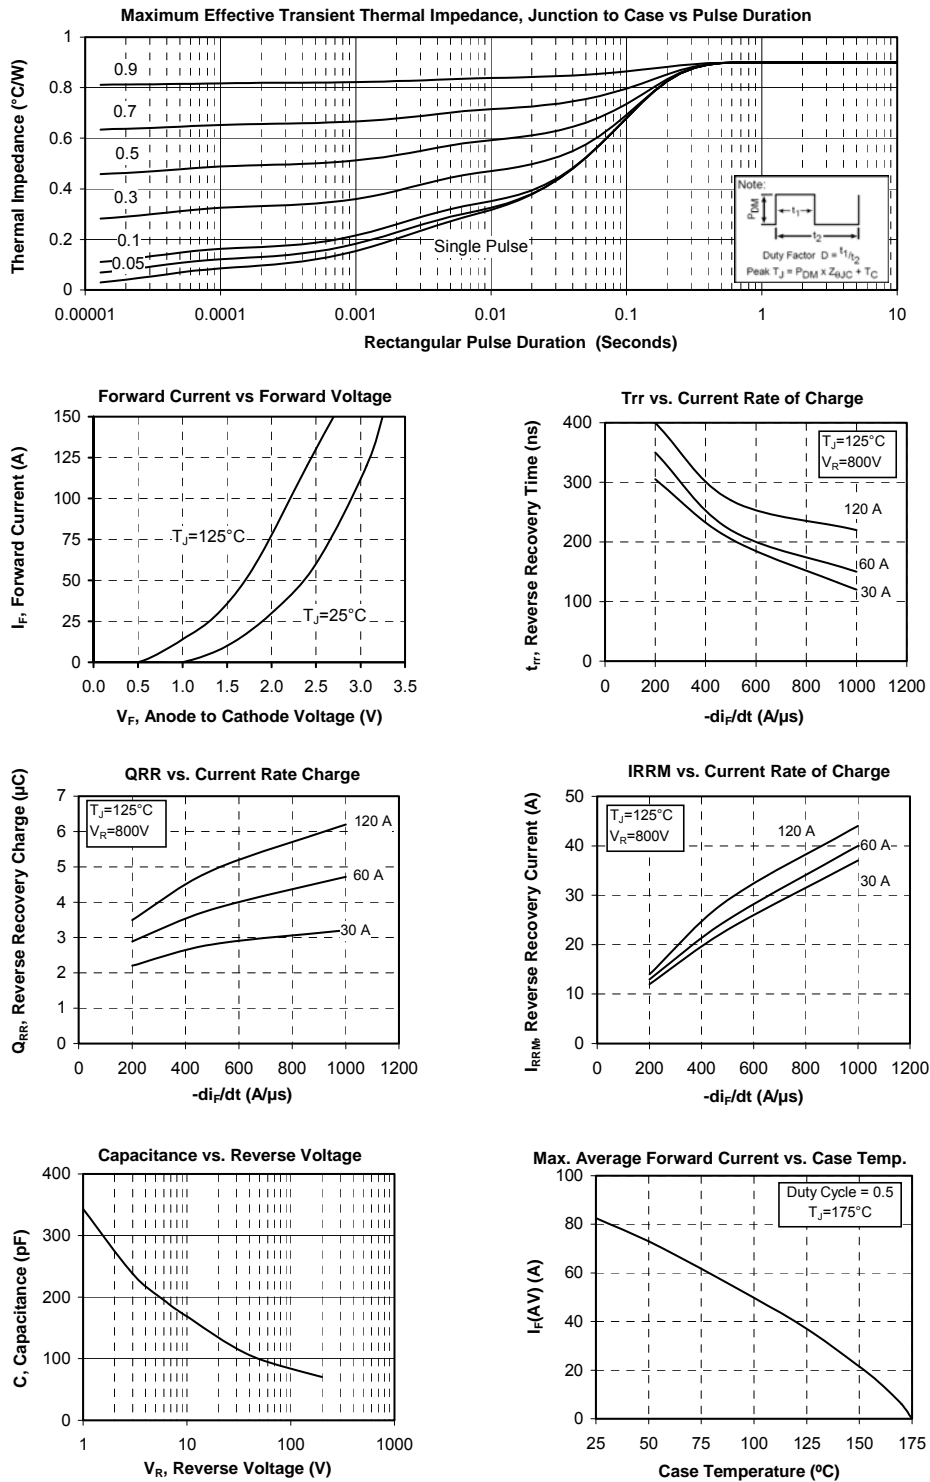

Microsemi reserves the right to change, without notice, the specifications and information contained herein

Microsemi's products are covered by one or more of U.S. patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S. and Foreign patents pending. All Rights Reserved.