

Euro-conn





product specification

SPECIFICATION

Current Rate: 3 AMP
 Insulation Resistance: 1000M Ω Min.
 Contact Resistance: 20m Ω Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105 °C
 Soldering Temperature: 200°C / 5 Sec

MATERIAL

Insulator Material: Polyester, UL 94V-0
 ©Standard: P.B.T
 Contact Material: Brass
 Finish: Gold plated
 ©Standard: Gold flash all over

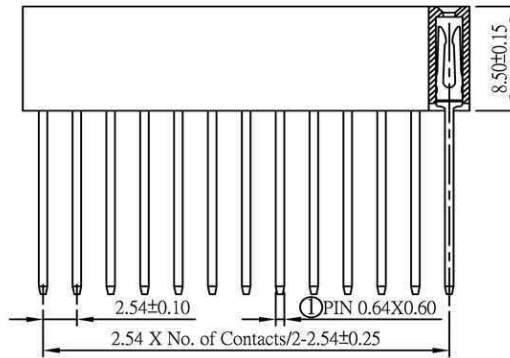

Recommended PCB Layout
 (PCB TOLERANCE ± 0.05)

ORDER INFORMATION: **FH254** - **1** ^{N.ro Pin} **XX** **DF085T** **149V**

| UNITS | mm | SIZE | A4 | SCALE | FIRST ANGLE PROJECTION |
|-----------|----|------|----|-------|------------------------|
| Euro-conn | | | | | |
| | | | | | HEADER |