

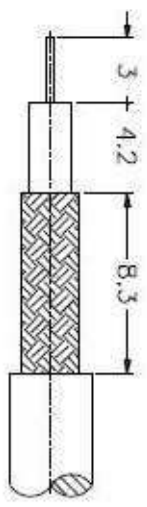
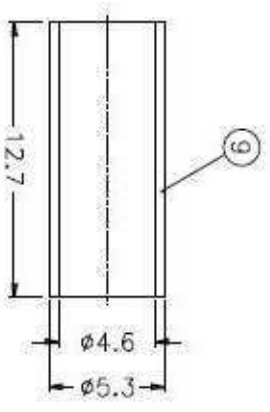


1	REVISIONS
2	DESCRIPTION PER REQUEST\DATE
3	
4	
5	
6	
7	
8	

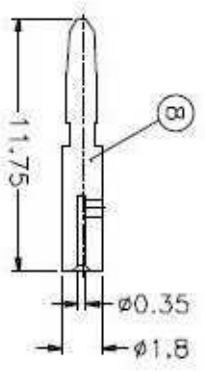

RECOMMENDED
CABLE STRIPPING DIM'S

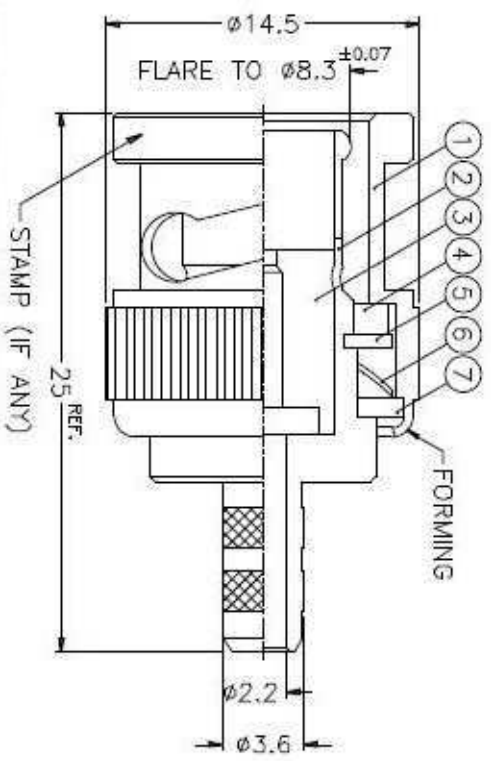

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. PTFE MIL-P-19468

1. CRIMPED FERRULE
HEX CRIMP SIZE .18"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .055"/.06"

9	FERRULE	COPPER	NOTE 3	1	FR-53/46X127C
8	CONTACT PIN	NOTE 1	NOTE 5	1	B1121A9-003-B -18/035
7	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
6	SPRINGS	SKS	NOTE 4	1	B50000-6
5	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
4	GASKET	RUBBER	RED	1	GS-115/8X15
3	INSULATOR	NOTE 6	NATURAL	1	B1121A9-003-ST -75
2	BODY	NOTE 1	NOTE 3	1	B50000-2-36/22
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED

PART NO.	B1121A9-003-NT3G-75
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

TITLE
Amphenol
BNC CRIMP PLUG
(FOR BT3002 CABLE)

DRAWING NO.
KJ-B1121A9-003-NT3G-75

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.	SCALE	3/1	ISSUE	A	FILE NO.
1										