


Accessories: Fiberoptic BFO N22-XA-VB-EAK-10-02

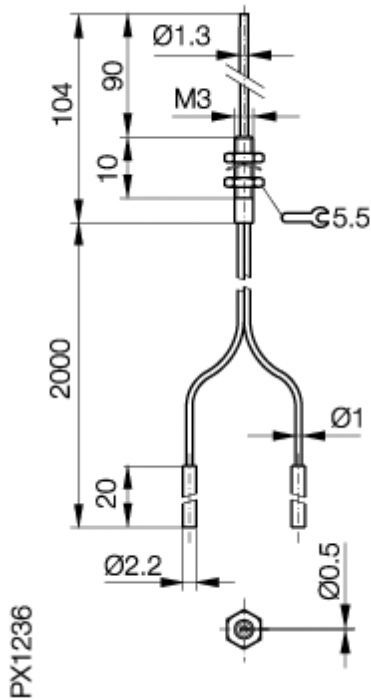

Common Data

| | |
|---------------------|------------------------------|
| Version | Fiber Optics straight |
| Usable with | with BOS 15K., BOS 20K., BOS |
| 74K.. | |
| Ambient temperature | -35°C...+65°C |
| Sensing range | 15mm |

Mechanical Data

| | |
|--------------------------------|----------------------------------|
| Measurements WxHxD or Dia x D | M3 x 10 + 1.3x90mm |
| Material | Brass, PE, PMMA, stainless steel |
| Mounting | with thread M3 |
| Diameter of glass fiber bundle | 2x0,5mm |
| Max. pull force on cable | 6N |
| Least bending radius | 15mm |

Datasheet number::

Definitions see general catalog.
If not otherwise noted, ratings according to
IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH
P.O.Box 1160
73761 Neuhausen Germany
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 10/2004

BALLUFF