


CONTACTS	DIMENSIONS	
	A	B
4	3.00	4.00
5	4.00	5.00
6	5.00	6.00
7	6.00	7.00
8	7.00	8.00
9	8.00	9.00
10	9.00	10.00
11	10.00	11.00
12	11.00	12.00
13	12.00	13.00
14	13.00	14.00
15	14.00	15.00
16	15.00	16.00
17	16.00	17.00
18	17.00	18.00
19	18.00	19.00
20	19.00	20.00
21	20.00	21.00
22	21.00	22.00
23	22.00	23.00
24	23.00	24.00
25	24.00	25.00
26	25.00	26.00
27	26.00	27.00
28	27.00	28.00
29	28.00	29.00
30	29.00	30.00
31	30.00	31.00
32	31.00	32.00
33	32.00	33.00
34	33.00	34.00
35	34.00	35.00
36	35.00	36.00
37	36.00	37.00
38	37.00	38.00
39	38.00	39.00
40	39.00	40.00

SPECIFICATIONS 规格:

CURRENT RATING 电流额定值: 1 AMP
 INSULATOR RESISTANCE 绝缘电阻值: 1000 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING 耐电压: AC 300 V
 CONTACT RESISTANCE 接触电阻值: 20mΩ Max.
 OPERATING TEMPERATURE 工作温度: -40° C TO +105° C
 CONTACT MATERIAL 端子物料: COPPER ALLOY
 INSULATOR MATERIAL 绝缘体物料:
 STANDARD 标准物料: POLYESTER 聚酯, LCP, UL 94-V0
 SOLDERING PROCESS 可焊性:
 LCP (STANDARD 标准物料) -
 IR REFLOW 回流焊: 260° C for 10 sec. Δ
 WAVE 波峰焊: 250° C for 5-10 sec
 MANUAL SOLDER 人工焊接: 350° C for 3-5 sec Δ
 MATES WITH 配套之母座 (SUBJECT TO PIN LENGTH 在端子长度适合的条件下):
 BC065 BC070 BC075

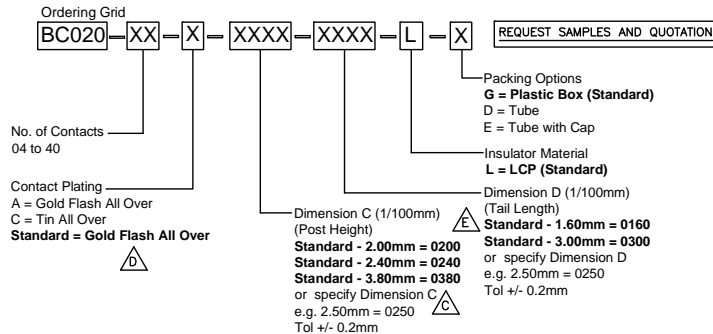

By	ASE	GG	SA	SA	SA
DETAIL	DRAWING RELEASE	CHANGE TO SOLDER TEMP. INFORMATION	AMENDMENT TO STANDARD DIMENSIONS	AMENDMENT TO PLATING OPTIONS	AMENDMENT TO ORDERING GRID
REV DATE	A 20/05/08	B 23/07/09	C 08/12/09	D 21/12/09	E 05/01/10



Tolerances (Except as noted)	Part Number:-	Date:-
Dimensions in mm X: ± 0.30 X*: ± 5° X.X: ± 0.25 X*: ± 3° X.XX: ± 0.15 X*: ± 2° X.XXX: ± 0.10 XXX*: ± 1°	BC020	20 MAY 08
Third Angle Projection	Description:- 1.0mm PITCH PIN HEADER, SINGLE ROW, THROUGH-HOLE, VERTICAL	
	THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT	



Scale	Revision	Material	Drawn by	Sheet No.
NTS	E	See Note	ASE	1/1

www.globalconnectortech.com