


COIL: @ 25°C  
 RESISTANCE 675 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 1.47 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 5 MS MAX  
RELEASE 5 MS MAX  
BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

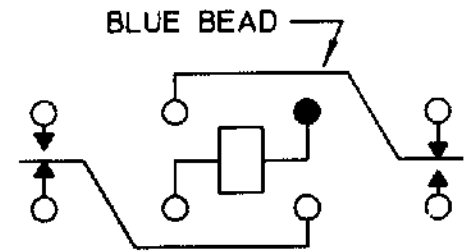

CONTACT RATING: LOW LEVEL TO 5A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/8/94 CK. *W. B. 12/4/94*


**COMMUNICATIONS  
INSTRUMENTS, INC.**

CUST. C. I. I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE FW5A RELAY

FW5A1201G00