



Manually operated switches



Standard microswitch 83 129 0

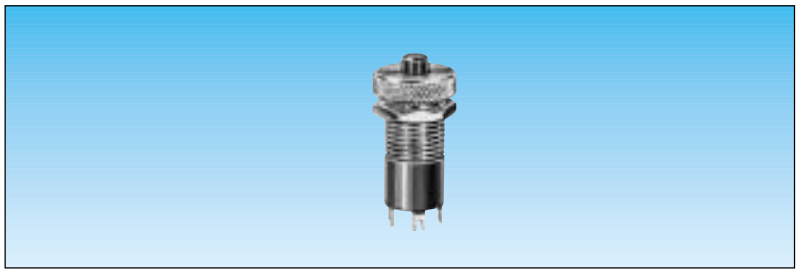

General specifications Layout



Function

C/O (changeover)

Connections

W2 solder

Approvals: UL - CSA on request

Electrical characteristics


Assigned working current

Ie : 0.5 A - Ue : 250 V

Thermal current : 8.5 A

Operating curve

Number of operations

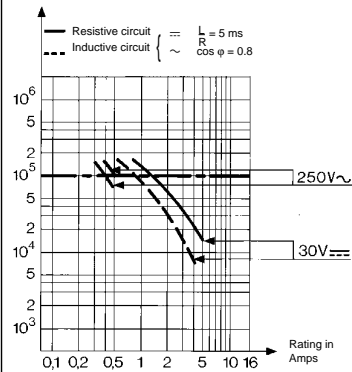

Mounting - Operation

See basic technical concepts on page 2/4.

Types

Momentary action	83 129 5
Protection against electric shocks to IEC 536 and NF 20030	Class I

Presentation


Threaded barrel nickel brass	•
Black dural button	•
Chrome-plated nut	•

Mechanical characteristics

Mechanical durability of operating device (operating cycles)	10 ⁶
Weight	5.5

Dimensions

83 129 5



1

2

Other information	To order, specify :
	<p>Standard products, 1 Type non stocked Example : manually operated switch - momentary action 83 129 5 - W2</p>