



SAW Components

Date Sheet B4130





SAW Components

B4130

Low-Loss Filter for Mobile Communication

897,5 MHz


Data Sheet



Ceramic Package DCC6C

Features

- Low-loss RF filter for EGSM mobile systems
- Low amplitude ripple
- Usable passband 35 MHz
- No matching network required for operation at 50 Ω
- Ceramic Package for Surface Mounted Technology (SMT)
- RoHS compatible

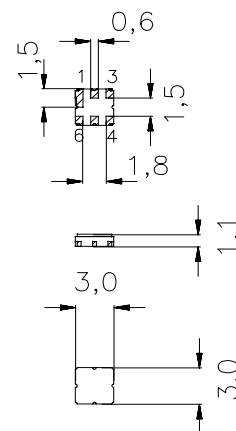


Terminals

- Ni, gold-plated

Pin configuration

- 2 Input
- 1 Input - ground
- 5 Output
- 6 Output - ground
- 3,4 Case ground

Dimensions in mm, approx. weight 37mg



Type	Ordering code	Marking and Package according to	Packing according to
B4130	B39901-B4130-U410	C61157-A7-A67	F61074-V8168-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	-40 / +85	°C	Machine Model, 10 pulses
Storage temperature range	T_{stg}	-40 / +85	°C	
DC voltage	V_{DC}	3	V	
ESD voltage	V^*_{ESD}	100*	V	
Input power max.				continuous wave, 85 °C continuous wave, 55 °C effective power in the on-state, duty cycle 4:8, 85 °C
925,0 ... 960,0 MHz	P_{IN}	12	dBm	
880,0 ... 915,0 MHz	P_{IN}	15	dBm	
		17	dBm	

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B4130

Low-Loss Filter for Mobile Communication

897,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = 25 \pm 2 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	897,50	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,0	2,3	dB
880,0 ... 915,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,1	dB
880,0 ... 915,0 MHz					
Input VSWR		—	1,7	2,0	
880,0 ... 915,0 MHz					
Output VSWR		—	1,7	2,0	
880,0 ... 915,0 MHz					
Attenuation	α				dB
0,0 ... 860,0 MHz		17	20	—	dB
925,0 ... 935,0 MHz		5,5	13	—	dB
935,0 ... 960,0 MHz		20	26	—	dB
960,0 ... 3660,0 MHz		20	26	—	dB



SAW Components

B4130

Low-Loss Filter for Mobile Communication

897,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -10$ to $+80^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	897,50	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,0	2,5	dB
880,0 ... 915,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,3	dB
880,0 ... 915,0 MHz					
Input VSWR		—	1,7	2,0	
880,0 ... 915,0 MHz					
Output VSWR		—	1,7	2,0	
880,0 ... 915,0 MHz					
Attenuation	α				
0,0 ... 860,0 MHz		17	20	—	dB
925,0 ... 935,0 MHz		4	8	—	dB
935,0 ... 960,0 MHz		20	26	—	dB
960,0 ... 3660,0 MHz		20	26	—	dB



SAW Components

B4130

Low-Loss Filter for Mobile Communication

897,5 MHz

Data Sheet




Characteristics

Operating temperature range: $T = -30$ to $+85^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$


		min.	typ.	max.	
Center frequency	f_c	—	897,50	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,0	2,5	dB
	880,0 ... 915,0 MHz				
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,3	dB
	880,0 ... 915,0 MHz				
Input VSWR		—	1,7	2,0	
	880,0 ... 915,0 MHz				
Output VSWR		—	1,7	2,0	
	880,0 ... 915,0 MHz				
Attenuation	α				dB
	0,0 ... 860,0 MHz	17	20	—	dB
	925,0 ... 935,0 MHz	3,2	7	—	dB
	935,0 ... 960,0 MHz	20	26	—	dB
	960,0 ... 3660,0 MHz	20	26	—	dB



Transfer function

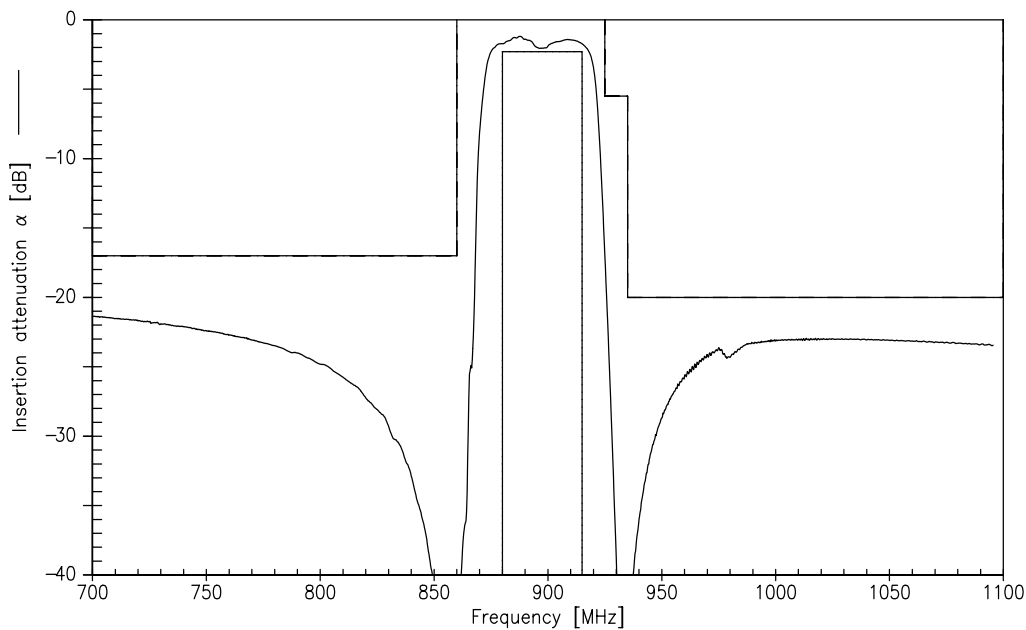

Transfer function (wideband)

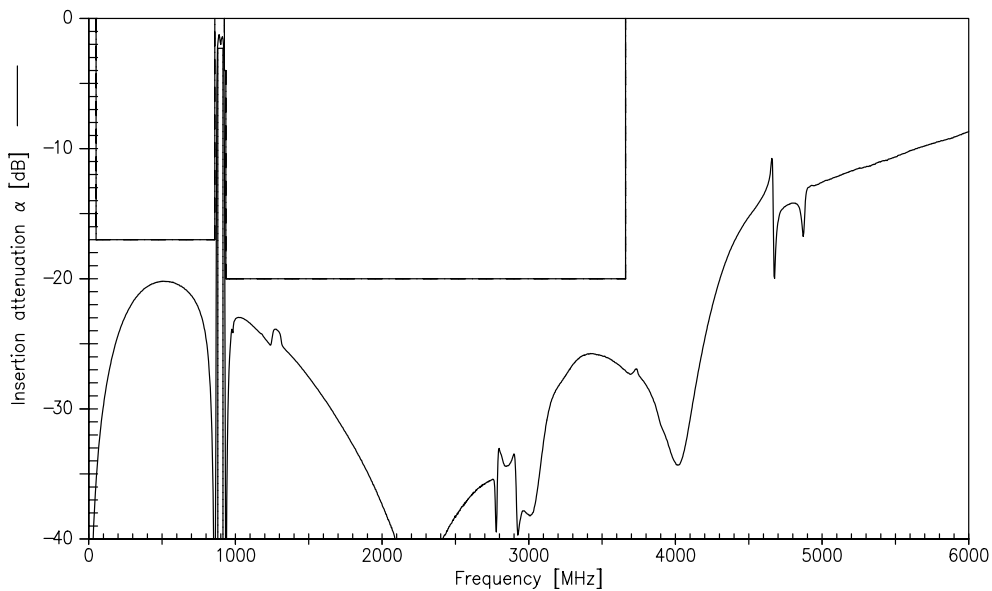



SAW Components

B4130

Low-Loss Filter for Mobile Communication

897,5 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW COM WT PD

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2006. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.