


MSD INC.

ENGINEERING DATA SHEET

RELAY TYPE: FCB-205-4X5	COMPUTER PART No.: 9347565	TEST PROCEDURE
CUSTOMER/SPECIFICATION: CATALOG ITEM	REV NONE	MSDP-791

TEST REQUIREMENTS

COIL RES.: $\pm 10\%$ 1600 OHMS OPERATE TIME: 5 ms MAX RELEASE TIME: 5 ms MAX
 CONTACT MAKE BOUNCE: 1 ms MAX N.O. BREAK BOUNCE: N/A
 CONTACT STABILIZATION TIME: N/A RATED COIL VOLTAGE: 48 Vdc
 CONTACT RES.: MFG TEST: .040 OHMS @ 10mA - 6Vdc FINAL TEST: .050 OHMS @ 10mA - 6Vdc
 CONTACT VOLTAGE DROP: FINAL TEST: .100 V MAX @ 5A - 6Vdc
 HI-POT: 1000 Vrms ALL POINTS
 INSULATION RESISTANCE: 100 MEGOHMS MIN. @ 500 Vdc
 VIBRATION: N/A
 SEAL TEST: 1×10^{-8} MAX LEAK RATE COIL TRANSIENT SUPPRESSION: N/A
 OTHER: _____

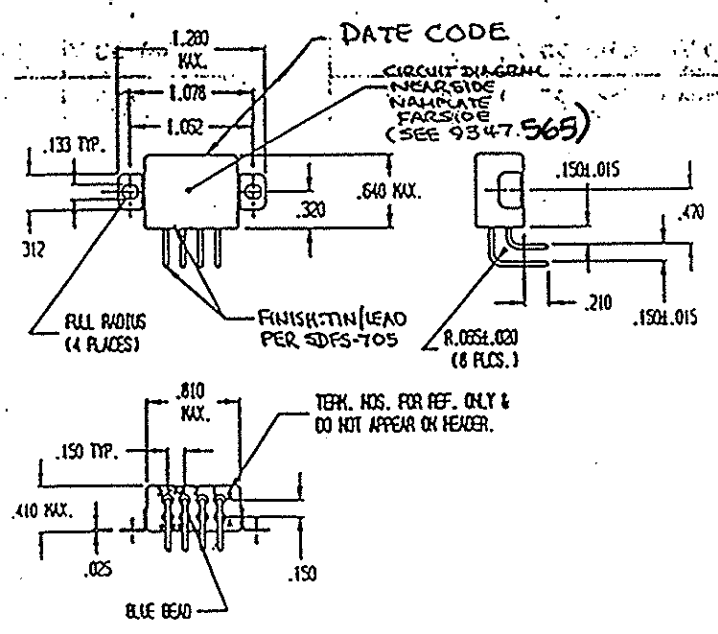

Prepared By: Date	Approved By: Date	
LES WYNNE 3-20-96	<i>J. Lockyer</i> 3-21-96	
Rev	ECN No.	Date
B	97-248	12-29-97

SPECIAL INSTRUCTIONS