


ORDERING INFORMATION

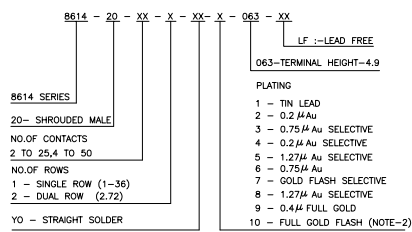

Notes:

1. THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
2. SHELF LIFE : SIX MONTHS FROM DATE OF MANUFACTURING

TECHNICAL SPECIFICATION

- INSULATOR MATERIAL : SELF EXTINGUISHING THERMOPLASTIC (UL94 VO)
- CONTACT MATERIAL : COPPER ALLOY
- MAXIMUM VOLTAGE : 1000 V rms.
- NOMINAL CURRENT : 3A AT 20°C
- INSULATION RESISTANCE : > 5000 MΩ
- CONTACT RESISTANCE : < 20 mΩ
- CLIMATIC CATAGORY : -55°C TO +125°C / 21 DAYS EXPOSURE TO- INDUSTRIAL ENVIRONMENT HUMIDITY TEST AS HE-14.

mat'l. code		REF TECH SPEC		surface	tolerance	projection	product family	
B		106-0128		ISO 1302	ISO 406 ISO 1101	MM	8614	
C		108-0006		angles	tolerances unless otherwise specified	scale	title	
		MINI		linear	0±0.1		SHROUDED MALE CONNECTOR (STRAIGHT SOLDER)	
		2008-07-22		dr	MINI K VANDANATH	2000-03-17		FCI
		2008-01-17		enr	ELIAS.C.T	2000-03-17		
				chr	ALEX BABU	2008-01-17		
				appd	BIJU K.P	2008-01-17		dwg no
sheet index		revision sheet		C		1		sheet 1 of 1
								size
								A3
								type
								Product Customer Drawing