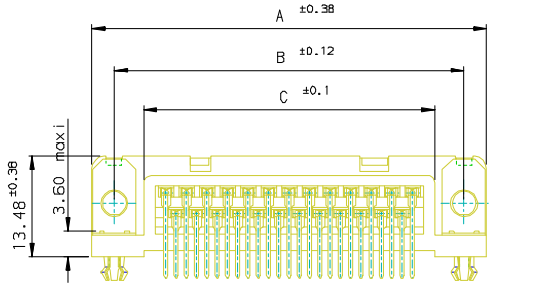



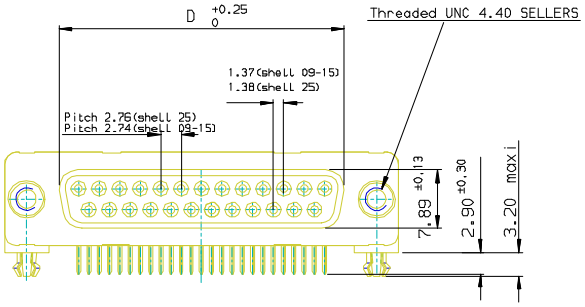

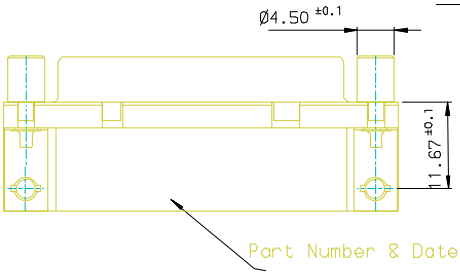

SHELL	A± 0.38	B± 0.12	C± 0.10	D± 0.25 0	E± 0.07
09	30.81	24.99	16.96	16.21	10.96
15	39.14	33.32	25.18	24.54	19.18
25	53.03	47.04	39.12	38.25	33.12

GENERAL CHARACTERISTICS : SEE DRAWING C01-8646-0000

PC card drilling dimensions(after plating)

(thickness 1.60±0.20mm)

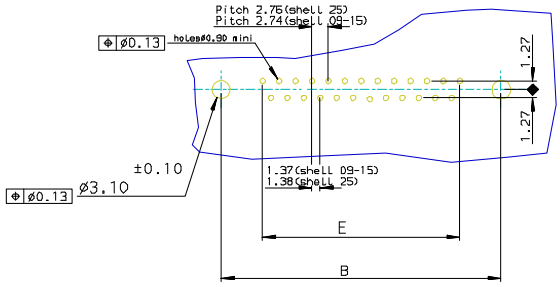

Core range

SHELL	PART NUMBER	DESIGNATIONS
09	D09S13A4GV00**	RECEPTACLE 9 CTS RIGHT ANGLED-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK UNC 4.40-ELEC.CONTIN.-PERFORM. LEVEL PL3
15	D15S13A4GV00**	RECEPTACLE 15 CTS RIGHT ANGLED-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK UNC 4.40-ELEC.CONTIN.-PERFORM. LEVEL PL3
25	D25S13A4GV00**	RECEPTACLE 25 CTS RIGHT ANGLED-SOLDER TO BOARD-PCB HARPOON-SCREWLOCK UNC 4.40-ELEC.CONTIN.-PERFORM. LEVEL PL3

LF FOR LEAD FREE

rev	ecn no	dr	date
G	I05-0124	JS	2005/07/27
H	I06-0074	SK	2006/06/08
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

European Views

www.fciconnect.com

surface ISO 1302 | tolerance std ISO 406 ISO 1101 | projection | mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

Dr	JOHN SLEEBA	1994/08/01	ANGULAR	LINEAR	0.X ±0.1	size A3
Eng	GEORGE VJ	1994/08/01			0.XX ±0.1	Scale 1:1
Chr	GEORGE VJ	2005/07/27	0.XX° ±1°		0.XXX ±0.1	ECN -
Appr	KVSD	2005/07/27	Product family		D-SUB	Spec ref -

title: SCREWLOCK,HARPOON,METAL PLATE.
SCREWLOCK,HARPOON,METAL PLATE.

dwg no C01-8646-0291-1 Rev. H

catalog no DELTA-D CUSTOMER sheet 1 of 1

REV F - 2006-04-17

Copyright FCI.

PDM: Rev:H STATUS:Released Printed: Aug 23, 2006

Downloaded from Datasheet.su