CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

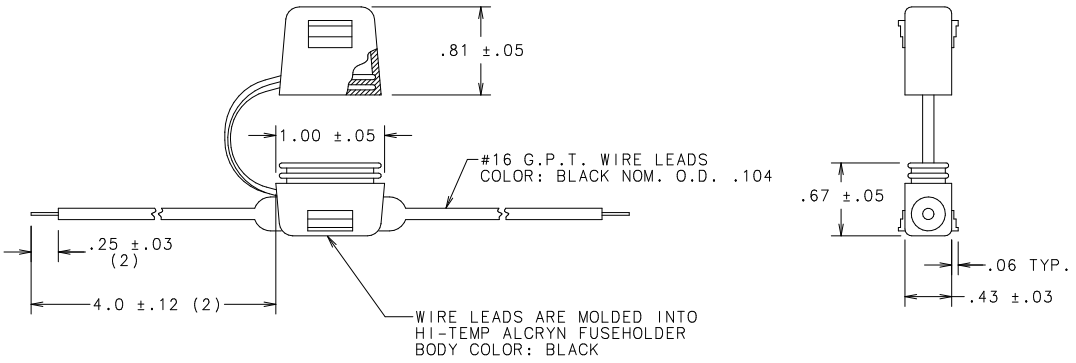

NOTES:

1. MAXIMUM RATING: 20 AMPS
2. BODY MATERIAL: ALCRYN, BLACK
   COVER MATERIAL: ALCRYN, BLACK
3. SUPPLIER: TRIPLEX MFG. CO. PART NUMBER 106LF

INSPECTION NOTE:

1. CHECK FOR CIRCUIT CONTINUITY USING FUSE OR COPPER DUMMY.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

MATL SPEC | FINISH

	DATE	SCALE
DRW PJM	12/14/00	FULL
CHK	DATE	SUPER DRW
APPD	DATE	RAW STK WT LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.01 FRACTION ±1/64
THREE PLACE DEC ±.005 ANGULAR ±1°

TITLE: ATO IN-LINE FUSEHOLDER

COPIES TO
1 9 18
2 10 19
3 12 20
4 13 21
5 14 23
6 15 33
7 16 43
8 17 53

Littelfuse® DES PLAINES, ILLINOIS 60016

REVISION E | DRWG. NO. FHAC0001Z | FINAL

LTR	REVISION	CHK	APD
E	80834D-REVISE & REDRAW IN NEW FORMAT 12/14/00 PJM		

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.
CR DENOTES CRITICAL CHARACTERISTICS.
CPK DENOTES CPK DIMENSIONS.-MINIMUM CPK VALUE
ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP DENOTES CP DIMENSIONS.-MINIMUM CP VALUE (MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

UNCONTROLLED DOCUMENT

Downloaded from Datasheet.su