


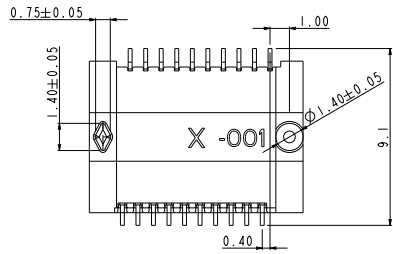
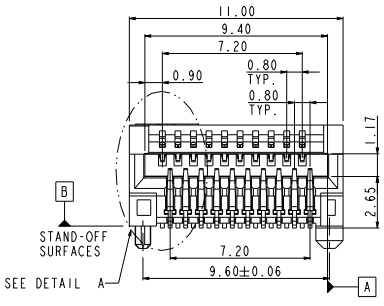


PRODUCT NO
10084423-X01LF

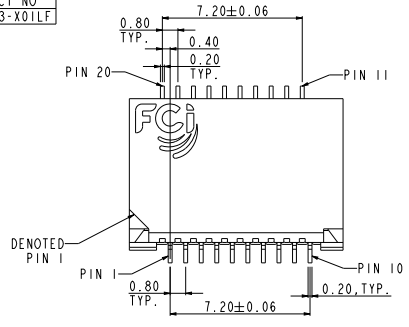


- NOTE:
- Material:
HOUSING: HIGH TEMPERATURE LCP, BLACK
UL 94 V-0 FLAME RETARDANT.
TERMINAL: NICKEL COPPER ALLOY
PLATING SPEC AS BELOW:
FOR CONTACT AREA:
-101LF FOR 0.76 MICROMETERS MIN. THICKNESS GOLD.
-201LF FOR 0.38 MICROMETERS MIN. THICKNESS GOLD.
-901LF FOR 0.76 MICROMETERS MIN. THICKNESS GXT.
FOR SOLDER AREA:
MATTE PURE TIN 3 MICROMETERS MIN.
FOR UNDERPLATING:
2.54 MICROMETERS MIN. THICKNESS NICKEL
 - PACKING SPEC. GS-14-1030.
 - PRODUCT SPEC. GS-12-557.
 - PART NUMBER SCHEME: (EX. 10084423-X01LF). PLEASE FIND THE PAGE 2 FOR OPTIONS.
 - LEAD FREE NOTES:
5a. THE HOUSING WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR 10 SECONDS IN A COVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
5b. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - THIS CONNECTOR IS DESIGNED TO WORK WITH RAIL SYSTEM THAT ALLOW THE MODULE TO "FLOAT" IN THE VERTICAL PLANE AND FIND EQUILIBRIUM BETWEEN THE UPPER AND LOWER CONTACT ROWS. THIS CONNECTOR WILL NOT PERFORM PROPERLY IF USED IN SYSTEMS THAT MECHANICALLY BIAS THE MODULE IN THE VERTICAL PLANE SUCH AS RAIL SYSTEMS WITH EMI SPRINGS.

spec ref	*	dr	Jumon Huang	20090421	projection	MM	size	A3	scale	5.000
tolerance std	ISO 406	eng	De-Feng Qin	20120322			ecn no	ELK-00-01077-1	rel level	Released
ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Terry Qiu						
surface	✓	appr	Pei-Ming Zheng	20120326	product family		rev	10084423-101	E	
ISO 1302	linear	0.X	±0.50		ASSEMBLY OF STANDARD TYPE 20 POS RIGHT ANGLE TYPE, EDGE CARD CONNECTOR	www.fci.com	cat. no.	Product - Customer Drw	sheet 1 of 2	
	linear	0.XX	±0.25							
	linear	0.XXX	±0.10							
	angular	0°	±2°							

Copyright FCI


Prod Form - Rev C - 2009-01-09

PRODUCT NO
10084423-X01LF

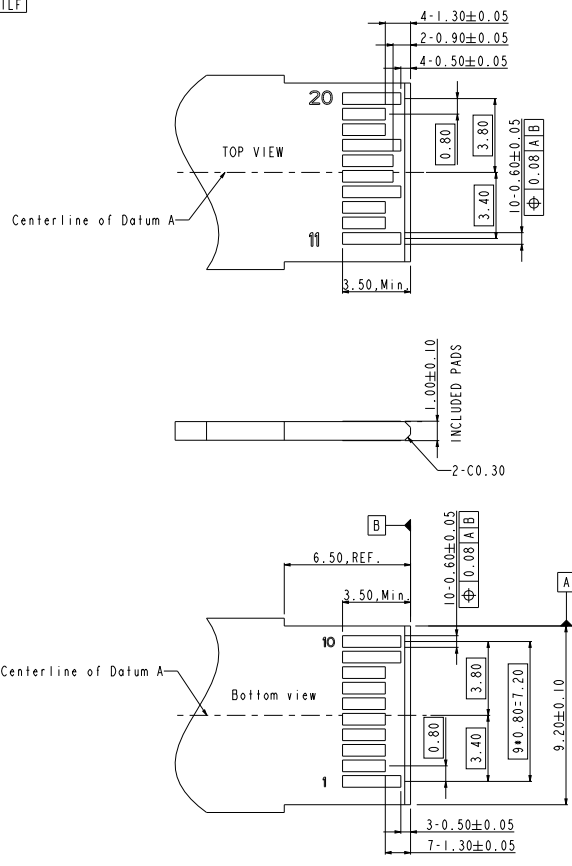

RECOMMENDED LAYOUT
MATING PCB SIDE

PART NUMBER	TERMINALS (Contact plating options)	TERMINALS (Underplating and Solder tail plating)	REMARK
10084423-101LF	0.76um, Min. Gold	Underplating: 2.54um Min. Nickel overall. Solder tail: 3um Min. Matte Tin.	
10084423-201LF	0.38um, Min. Gold	Underplating: 2.54um Min. Nickel overall. Solder tail: 3um Min. Matte Tin.	
10084423-901LF	0.76um, Min. GXT	Underplating: 2.54um Min. Nickel overall. Solder tail: 3um Min. Matte Tin.	

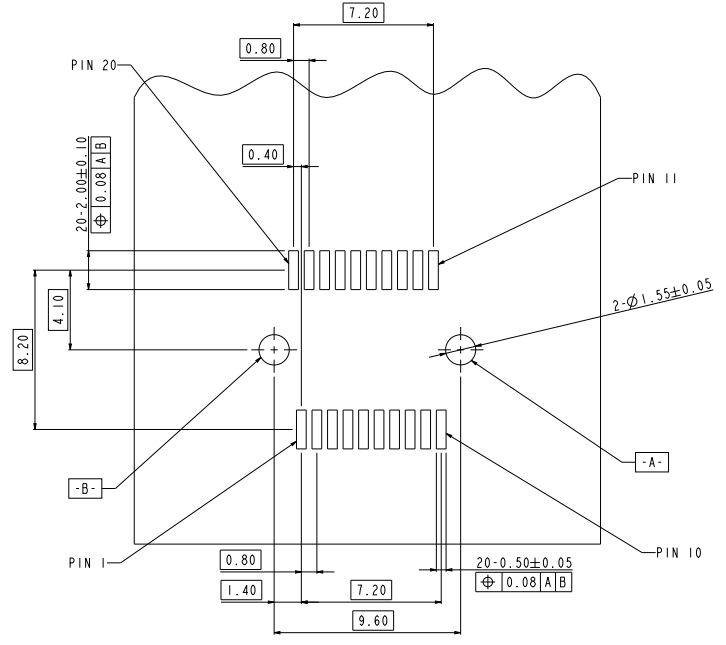

RECOMMENDED PCB LAYOUT
CONNECTOR MOUNTING SIDE

spec ref	*	dr	Junon Huang	20090421	projection	MM	size	A3	scale	5.000
tolerance std	ISO 406	eng	De-Feng Qin	20120322			ecn no	ELK-00-01077-1	rel level	Released
ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED	chr	Terry Gu	20120326						
surface	ISO 1302	appr	Pei-Ming Zheng	20120326	product family					
linear	0.X ±0.25			TITLE ASSEMBLY OF STANDARD TYPE 20 POS RIGHT ANGLE TYPE EDGE CARD CONNECTOR		dwg no	10084423-101	rev	E	
angular	0° ±2°	www.fci.com	cat. no.		Product - Customer Drw	sheet 2 of 2				

Prod File - Rev C - 2009-01-09

PDS: Rev :E

STATUS:Released

Printed: Mar 26, 2012

Copyright FCI