

Alle Rechte vorbehalten/ All rights reserved

5



4

3


2

1


(1:1)

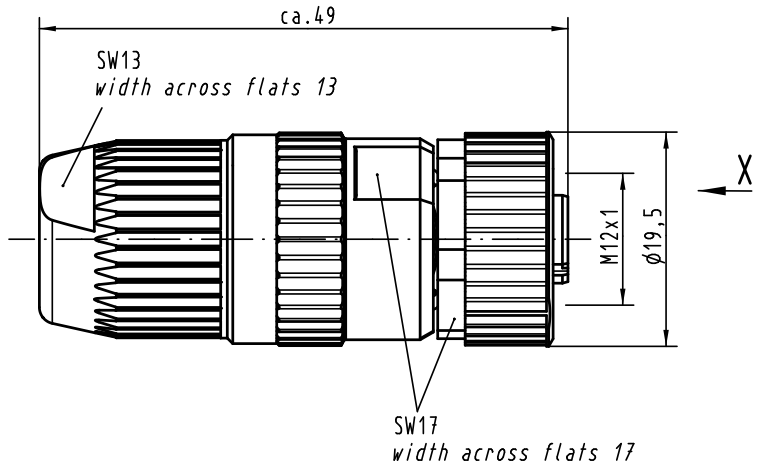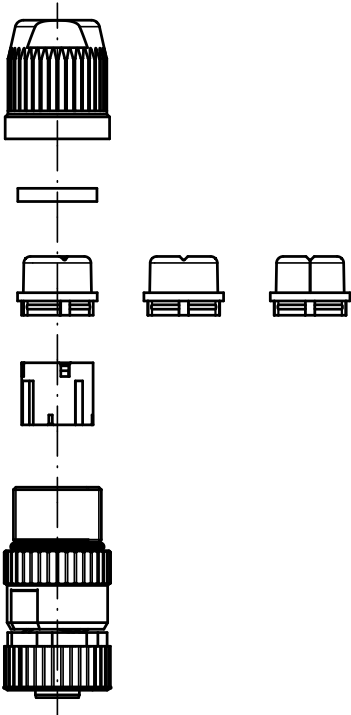

Steckgesicht n.  
Contact face acc. to  
IEC 61076-2-101



Leiterquerschnitt conductor cross section	0,14 - 0,34mm <sup>2</sup> AWG26-AWG22
Kabeldurchmesser cable outside diameter	4,5 - 8,8mm



All Dimensions in mm Original Size DIN A 4			Techn. Character.			Nicht tolerierte Maß/Free size tolerances	
Mod.	Dat.	Name	Dat.	Name	Maßstab/Scale		
EC01527	01.07.11	DY	Detail.	10.03.04	DY	2:1	M12-L RSV geschirmt, Buchse, A-kodiert, 4-polig Circular connector shielded, female, A-coded, 4-pole
413867	13.05.08	DY	Insp.		SR		
412800	19.03.07	DY	Stand.				
411606	08.08.05	DY					
410925			HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP			TB 21 03 221 2405	
						Sub.	Blatt/ page



Blatt/ page

Sub.