


PCB layout, component side

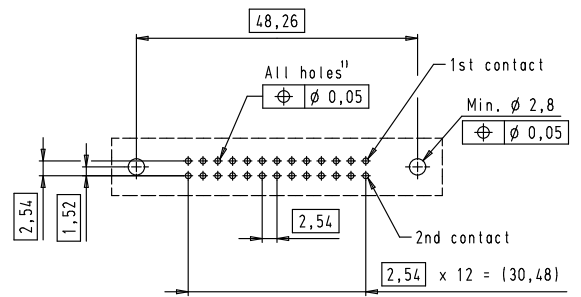

1) Drilled hole for press fit: $\phi 1,133 / \phi 1,158$
 Finished hole for press fit: $\phi 0,94 / \phi 1,09$

09 18 526 7909	3
09 18 526 6909	2
09 18 526 5909	1 (0,76 $\mu\text{m Au}$)
Part number	Performance level

				Det.	11/09/06	PK		SEK 18 Male Connector Standard 26 poles Press in Long locking levers	Maßstab/ Scale 1,5:1
EC00823	16/09/09	PK	Stand.	Insp.					
33950	13/03/07	PK						TB 09 18 526 X909	Blatt / Page 1 / 1
33803	11/09/06	PK							
Mod.	Del.	Num					Sub.		