

DIN 41 612 · complementary type 2B



Number of contacts

32, 16




DIN Signal to 2 A

Male connectors


Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to IEC 60 603-2. Explanation chapter 00		
				3	2	1
Male connector with angled solder pins	32		09 22 132 7921	09 22 132 6921 09 22 332 6921 ^{b)}	09 22 132 2921	
	16		09 22 116 7931	09 22 116 6931	09 22 116 2931	
	30 + 2 [▲]		09 22 132 7951	09 22 132 6951	09 22 132 2951	
Male connector with straight solder pins	32		09 22 132 7922	09 22 132 6922	09 22 132 2922	
	16		09 22 116 7932	09 22 116 6932	09 22 116 2932	
	30 + 2 [▲]		09 22 132 7952	09 22 132 6952	09 22 132 2952	

Dimensions

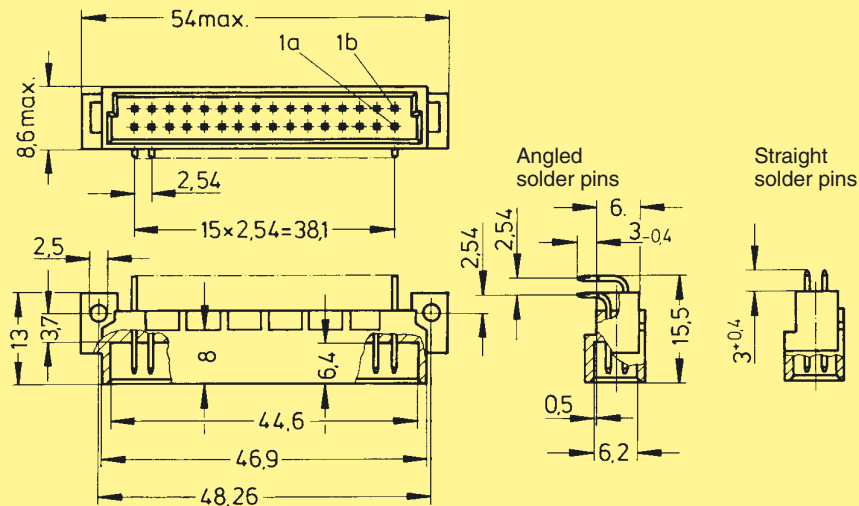

Board drillings

Mounting side

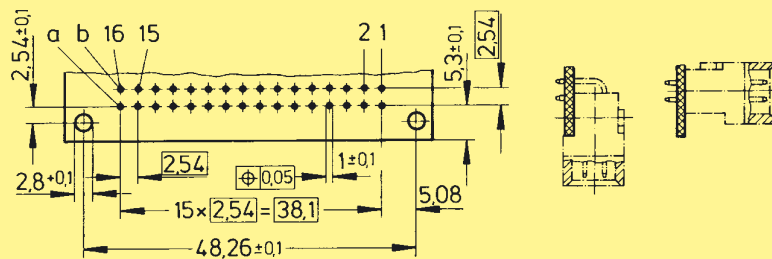

Dimensions in mm

▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a16]
 Other contact arrangements on request
 b) Connectors with snap-in clips see chapter 00